


# MINIATURE ALUMINUM ELECTROLYTIC CAPACITORS

## SS Standard, Height 7mm Series


- Super miniature series with 7mm height
- Suited for use in compact audio equipment
- Load life of 2000 hours at 85°C

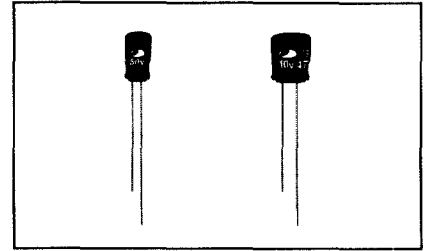

Item	Characteristics																		
<b>Operating temperature range</b>	-40 ~ +85°C																		
<b>Leakage current max.</b>	$I = 0.01CV$ or $4\mu A$ whichever is greater (after 1 minute)																		
<b>Capacitance tolerance</b>	$\pm 20\%$ at 120Hz, 20°C																		
<b>Dissipation factor max. (at 120Hz, 20°C)</b>	<table border="1"> <thead> <tr> <th>WV</th> <th>4</th> <th>6.3</th> <th>10</th> <th>16</th> <th>25</th> <th>35, 40</th> <th>50</th> <th>63</th> </tr> </thead> <tbody> <tr> <td><math>\tan\delta</math></td> <td>0.35</td> <td>0.24</td> <td>0.20</td> <td>0.16</td> <td>0.14</td> <td>0.12</td> <td>0.10</td> <td>0.10</td> </tr> </tbody> </table>	WV	4	6.3	10	16	25	35, 40	50	63	$\tan\delta$	0.35	0.24	0.20	0.16	0.14	0.12	0.10	0.10
WV	4	6.3	10	16	25	35, 40	50	63											
$\tan\delta$	0.35	0.24	0.20	0.16	0.14	0.12	0.10	0.10											
<b>Low temperature characteristics (Impedance ratio at 120Hz)</b>	<table border="1"> <thead> <tr> <th>WV</th> <th>4</th> <th>6.3</th> <th>10</th> <th>16, 25</th> <th>35~63</th> </tr> </thead> <tbody> <tr> <td>Z-25°C/Z+20°C</td> <td>6</td> <td>4</td> <td>3</td> <td>2</td> <td>2</td> </tr> <tr> <td>Z-40°C/Z+20°C</td> <td>12</td> <td>8</td> <td>6</td> <td>4</td> <td>3</td> </tr> </tbody> </table>	WV	4	6.3	10	16, 25	35~63	Z-25°C/Z+20°C	6	4	3	2	2	Z-40°C/Z+20°C	12	8	6	4	3
WV	4	6.3	10	16, 25	35~63														
Z-25°C/Z+20°C	6	4	3	2	2														
Z-40°C/Z+20°C	12	8	6	4	3														
<b>Load life (after application of the rated voltage for 2000 hours at 85°C)</b>	<table border="1"> <tbody> <tr> <td>Leakage current</td> <td>Less than specified value</td> </tr> <tr> <td>Capacitance change</td> <td>Within <math>\pm 20\%</math> of initial value</td> </tr> <tr> <td><math>\tan\delta</math></td> <td>Less than 200% of specified value</td> </tr> </tbody> </table>	Leakage current	Less than specified value	Capacitance change	Within $\pm 20\%$ of initial value	$\tan\delta$	Less than 200% of specified value												
Leakage current	Less than specified value																		
Capacitance change	Within $\pm 20\%$ of initial value																		
$\tan\delta$	Less than 200% of specified value																		
<b>Shelf life (at 85°C)</b>	After 1000 hours no load test, leakage current, capacitance and $\tan\delta$ are same as load life value.																		

### ● DRAWING

Unit : mm

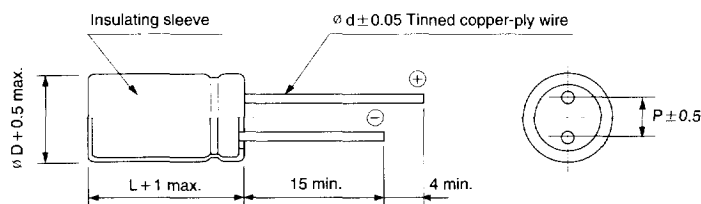

ø D	4	5	6.3
P	1.5	2.0	2.5
ø d	0.45	0.5	0.5

### ● DIMENSIONS & MAXIMUM PERMISSIBLE RIPPLE CURRENT

μF \ WV	4	6.3	10	16	25	35	40	50	63						
0.1								4 × 7	4.4	4 × 7	4.4				
0.15								4 × 7	5.4	4 × 7	5.4				
0.22								4 × 7	6.6	4 × 7	6.6				
0.33								4 × 7	8.0	4 × 7	8.0				
0.47								4 × 7	10	4 × 7	10				
0.68								4 × 7	12	4 × 7	12				
1.0								4 × 7	14	4 × 7	14				
1.5								4 × 7	17	4 × 7	17				
2.2								4 × 7	21	4 × 7	21				
3.3								4 × 7	25	4 × 7	25				
4.7								4 × 7	30	4 × 7	30				
6.8							4 × 7	33	4 × 7	33	4 × 7	37	5 × 7	42	
10					4 × 7	37	4 × 7	40	4 × 7	40	5 × 7	51	5 × 7	51	
15				4 × 7	43	4 × 7	46	5 × 7	57	5 × 7	57	6.3 × 7	72	6.3 × 7	72
22			4 × 7	46	4 × 7	52	5 × 7	64	5 × 7	69	6.3 × 7	80	6.3 × 7	88	
33	4 × 7	43	4 × 7	52	4 × 7	57	5 × 7	73	5 × 7	78	6.3 × 7	98	6.3 × 7	98	
47	4 × 7	51	4 × 7	62	5 × 7	78	5 × 7	87	6.3 × 7	108					
68	5 × 7	71	5 × 7	86	5 × 7	94	6.3 × 7	122							
100	5 × 7	86	5 × 7	104	6.3 × 7	132	6.3 × 7	148							
150	6.3 × 7	122	6.3 × 7	148	6.3 × 7	162									
220	6.3 × 7	148	6.3 × 7	179											

↑ Ripple current (mA rms) at 85°C, 120Hz  
 — Case size ø D × L (mm)