


PRELIMINARY

Chip Inductors - M0603CS Series (1608)


Small size, exceptional Q and high SRFs make these inductors ideal for high frequency applications where size is at a premium. They also have excellent DCR and current carrying characteristics.

This robust version of Coilcraft's standard 0603CS series features a high temperature encapsulant that allows operation in ambient temperatures up to 155°C and a leach-resistant base metalization with 63/37 tin-lead terminations that ensures the best possible board adhesion.



Typical L vs Frequency

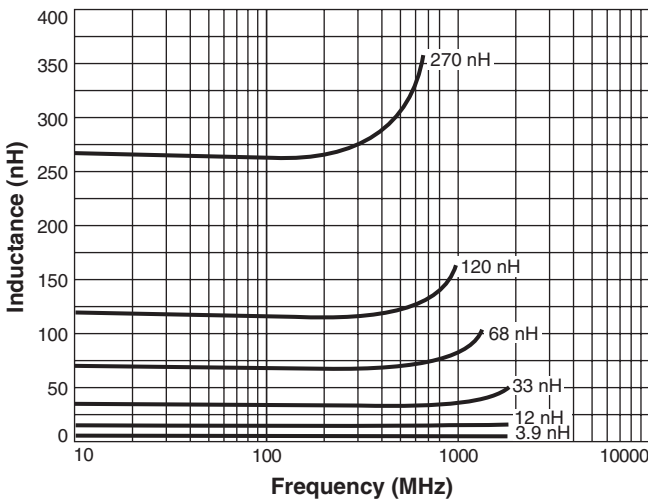

Typical Q vs Frequency

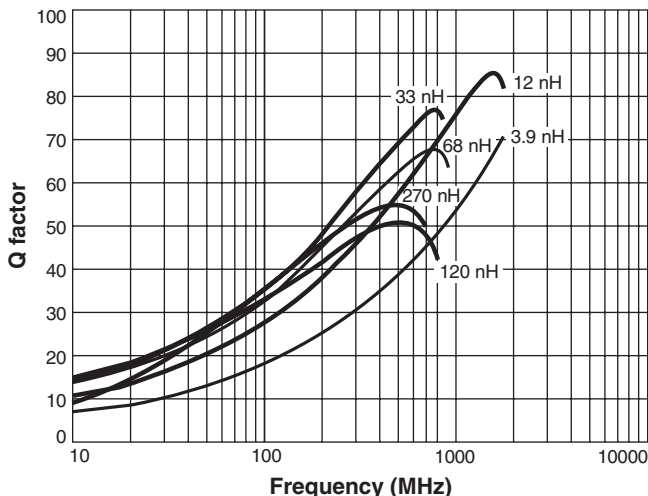

Irms Derating

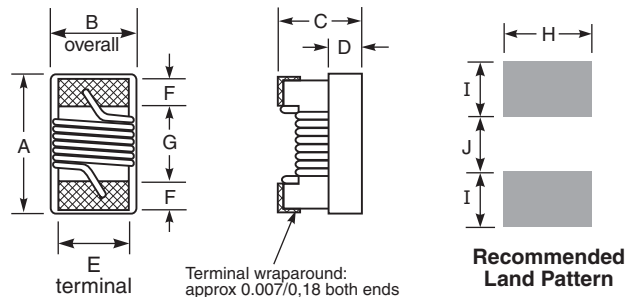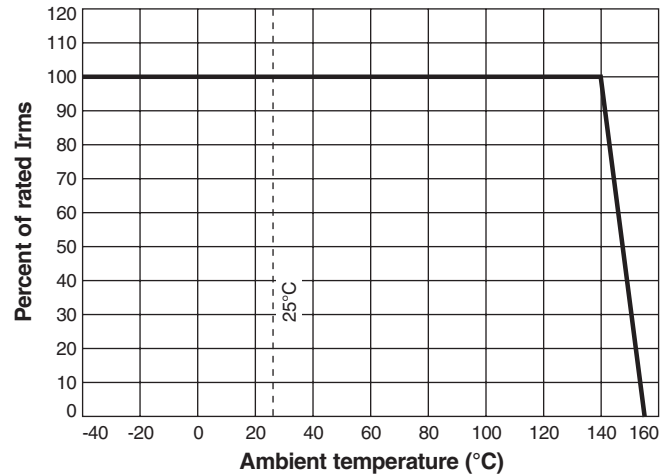

A	B	C	D	E	F	G	H	I	J
max	max	max	ref						
0.071	0.044	0.040	0.015	0.030	0.013	0.034	0.040	0.025	0.025
1,80	1,12	1,02	0,38	0,76	0,33	0,86	1,02	0,64	0,64

Core material Ceramic

Terminations Tin-lead (63/37) over silver-palladium-platinum-glass frit

Ambient temperature -55°C to +140°C with I_{rms} current, +140°C to +155°C with derated current

Storage temperature Component: -55°C to +155°C.
Packaging: -55°C to +80°C

Resistance to soldering heat Max three 40 second reflows at +260°C, parts cooled to room temperature between cycles

Temperature Coefficient of Inductance (TCL) +25 to +125 ppm/°C

Moisture Sensitivity Level (MSL) 1 (unlimited floor life at <30°C / 85% relative humidity)

Enhanced Crush-Resistant Packaging 2000 per 7" reel
Paper tape: 8 mm wide, 1.0 mm thick, 4 mm pocket spacing



These parts are preproduction products for electrical evaluation only.
Specification subject to change without notice.

Document M195-1 Revised 04/10/08

1102 Silver Lake Road
Cary IL 60013

Phone 800-981-0363
Fax 847-639-1508

E-mail cp@coilcraft.com
Web www.coilcraft.com/cp

PRELIMINARY**M0603CS Series (1608)**

Part number ¹	Inductance ² (nH)	Percent tolerance	Q min ³	900 MHz		1.7 GHz		SRF min ⁴ (MHz)	DCR max ⁵ (Ohms)	Irms ⁶ (mA)	Color code
				L typ	Q typ	L typ	Q typ				
M0603CS-1N6X_	1.6 @ 250 MHz	5	24	1.67	49	1.65	63	12500	0.030	700	Red
M0603CS-1N8X_	1.8 @ 250 MHz	5	16	1.83	35	1.86	50	12500	0.045	700	Black
M0603CS-2N2X_	2.2 @ 250 MHz	5	13	2.22	31	2.24	44	12500	0.250	100	Yellow
M0603CS-3N3X_	3.3 @ 250 MHz	5,2	35	3.31	75	3.38	88	5900	0.045	700	Blue
M0603CS-3N6X_	3.6 @ 250 MHz	5,2	22	3.72	53	3.71	65	5900	0.063	700	Red
M0603CS-3N9X_	3.9 @ 250 MHz	5,2	22	3.95	49	3.96	67	6900	0.080	700	Brown
M0603CS-4N3X_	4.3 @ 250 MHz	5,2	22	4.32	50	4.33	70	5900	0.063	700	Orange
M0603CS-4N7X_	4.7 @ 250 MHz	5,2	20	4.72	47	4.75	57	5800	0.116	700	Violet
M0603CS-5N1X_	5.1 @ 250 MHz	5,2	20	4.93	47	4.95	56	5700	0.140	700	Green
M0603CS-5N6X_	5.6 @ 250 MHz	5,2	26	5.77	63	6.05	80	4760	0.075	700	Black
M0603CS-6N8X_	6.8 @ 250 MHz	5,2	27	6.75	60	7.10	81	5800	0.110	700	Red
M0603CS-7N5X_	7.5 @ 250 MHz	5,2	28	7.70	60	7.82	65	4800	0.106	700	Brown
M0603CS-8N2X_	8.2 @ 250 MHz	5,2	30	8.25	82	8.37	87	4200	0.115	700	Orange
M0603CS-8N7X_	8.7 @ 250 MHz	5,2	28	8.86	62	9.32	58	4600	0.109	700	Yellow
M0603CS-9N5X_	9.5 @ 250 MHz	5,2	28	9.7	59	9.92	61	5400	0.135	700	Blue
M0603CS-10NX_	10 @ 250 MHz	5,2	31	10.0	66	10.6	83	4800	0.130	700	Orange
M0603CS-11NX_	11 @ 250 MHz	5,2	30	11.0	53	11.5	56	4000	0.130	700	Gray
M0603CS-12NX_	12 @ 250 MHz	5,2	35	12.3	72	13.5	83	4000	0.130	700	Yellow
M0603CS-15NX_	15 @ 250 MHz	5,2	35	15.4	64	16.8	89	4000	0.170	700	Green
M0603CS-16NX_	16 @ 250 MHz	5,2	34	16.2	55	17.3	52	3300	0.170	700	White
M0603CS-18NX_	18 @ 250 MHz	5,2	35	18.7	70	21.4	69	3100	0.170	700	Blue
M0603CS-22NX_	22 @ 250 MHz	5,2	38	22.8	73	26.1	71	3000	0.190	700	Violet
M0603CS-23NX_	23 @ 250 MHz	5,2	38	24.1	71	28.0	67	2850	0.190	700	Orange
M0603CS-24NX_	24 @ 250 MHz	5,2	36	24.5	45	28.7	39	2650	0.190	700	Black
M0603CS-27NX_	27 @ 250 MHz	5,2	40	29.2	74	34.6	65	2800	0.220	600	Gray
M0603CS-30NX_	30 @ 250 MHz	5,2	37	31.4	47	39.9	28	2250	0.220	600	Brown
M0603CS-33NX_	33 @ 250 MHz	5,2	40	36.0	67	49.5	42	2300	0.220	600	White
M0603CS-36NX_	36 @ 250 MHz	5,2	37	39.4	47	52.7	24	2080	0.250	600	Red
M0603CS-39NX_	39 @ 250 MHz	5,2	40	42.7	60	60.2	40	2200	0.250	600	Black
M0603CS-43NX_	43 @ 250 MHz	5,2	38	47.0	44	64.9	21	2000	0.280	600	Orange
M0603CS-47NX_	47 @ 200 MHz	5,2	38	52.2	62	77.2	35	2000	0.280	600	Brown
M0603CS-51NX_	51 @ 200 MHz	5,2	35	55.5	69	82.2	34	1900	0.270	600	Blue
M0603CS-56NX_	56 @ 200 MHz	5,2	38	62.5	56	97.0	26	1900	0.310	600	Red
M0603CS-68NX_	68 @ 200 MHz	5,2	37	80.5	54	168	21	1700	0.340	600	Orange
M0603CS-72NX_	72 @ 150 MHz	5,2	34	82.0	53	135	20	1700	0.490	400	Yellow
M0603CS-82NX_	82 @ 150 MHz	5,2	34	96.2	54	177	21	1700	0.540	400	Green
M0603CS-R10X_	100 @ 150 MHz	5,2	34	124	49	—	—	1400	0.580	400	Blue
M0603CS-R11X_	110 @ 150 MHz	5,2	32	138	43	—	—	1350	0.610	300	Violet
M0603CS-R12X_	120 @ 150 MHz	5,2	32	166	39	—	—	1300	0.650	300	Gray
M0603CS-R15X_	150 @ 150 MHz	5,2	28	250	25	—	—	990	0.920	280	White
M0603CS-R18X_	180 @ 100 MHz	5,2	25	305	22	—	—	990	1.25	240	Black
M0603CS-R20X_	200 @ 100 MHz	5,2	25	—	—	—	—	900	1.98	200	Green
M0603CS-R21X_	210 @ 100 MHz	5,2	27	—	—	—	—	895	2.06	200	Gray
M0603CS-R22X_	220 @ 100 MHz	5,2	25	—	—	—	—	900	2.10	200	Brown
M0603CS-R25X_	250 @ 100 MHz	5,2	25	—	—	—	—	822	3.55	120	Violet
M0603CS-R27X_	270 @ 100 MHz	5,2	24	—	—	—	—	900	2.30	170	Red
M0603CS-R33X_	330 @ 100 MHz	5,2	25	—	—	—	—	900	3.89	100	Blue
M0603CS-R39X_	390 @ 100 MHz	5,2	25	—	—	—	—	900	4.35	100	Yellow

1. When ordering, please specify **tolerance** code:

↓
M0603CS-R39X J

Tolerance: G = 2% J = 5%

- Inductance measured using a Coilcraft SMD-A fixture in an Agilent/HP 4286 impedance analyzer with Coilcraft-provided correlation pieces.
 - Q measured at the same frequency as inductance using an Agilent/HP 4291A with an Agilent/HP 16193 test fixture.
 - SRF measured using an Agilent/HP 8720D network analyzer and a Coilcraft SMD-D test fixture.
 - DCR measured on a Cambridge Technology micro-ohmmeter and a Coilcraft CCF858 test fixture.
 - Current that causes a 15°C temperature rise from 25°C ambient.
 - Electrical specifications at 25°C.
- Refer to Doc 362 "Soldering Surface Mount Components" before soldering.



Critical Products

These parts are preproduction products for electrical evaluation only.
Specification subject to change without notice.

1102 Silver Lake Road
Cary IL 60013

Phone 800-981-0363
Fax 847-639-1508

Document M195-2 Revised 04/10/08

E-mail cp@coilcraft.com
Web www.coilcraft.com/cp