

D 9960

Features:

- epoxy-coated low profile housing
- low temperature coefficient

Application:

- twilight switches
- protection of building sites



D 9972

Features:

- epoxy-coated low profile housing

Application:


- twilight switches
- protection of building sites

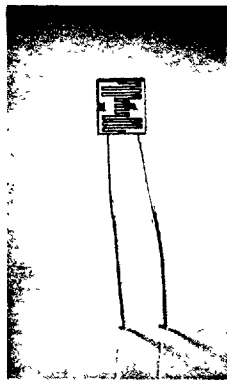


TYP	R ₁₀ [kΩ]	R ₁₀₀ [kΩ]	R ₀₁ [kΩ]	R ₀₅ [kΩ]	V _{max} [V]	P _{max} [mW]	t _{an} [ms]	t _{ab} [ms]	TK [%/K]
D 9960 11	2,3	0,59	10	30	150	250	60	35	0,3
9960 12	3,9	0,8	30	90	150	250	50	30	0,35
9960 13	9,4	1,4	100	300	150	250	35	28	0,4
D 9960 21	7,0	1,8	30	90	150	250	60	35	0,3
9960 22	11,7	2,5	94	290	150	250	50	30	0,35
9960 23	28,0	4,1	1 400	4 200	150	250	35	28	0,4
D 9972 11*	2,9	0,48	50	150	50	100	10	10	2
9972 12*	11	0,95	500	1 500	50	100	10	10	2
9972 13*	42	1,85	10 000	30 000	50	100	7	10	2

*available on special request and with higher quantities only

D 9960...

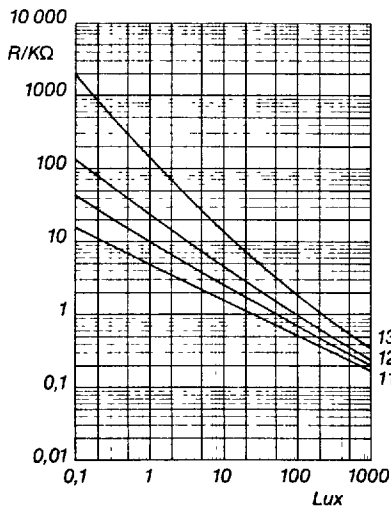

D 9960...

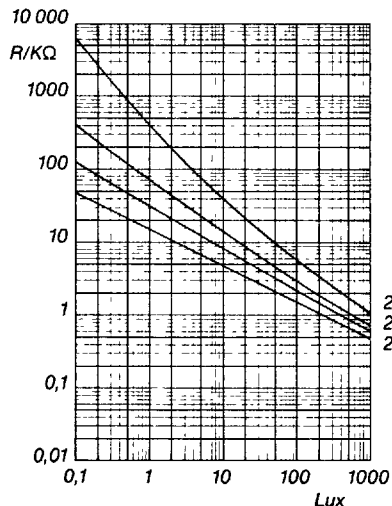

D 9972...

