
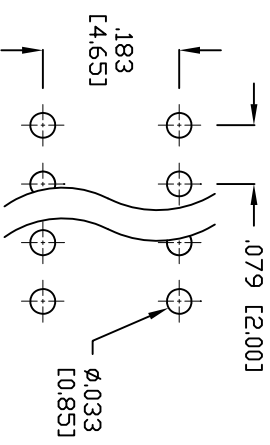
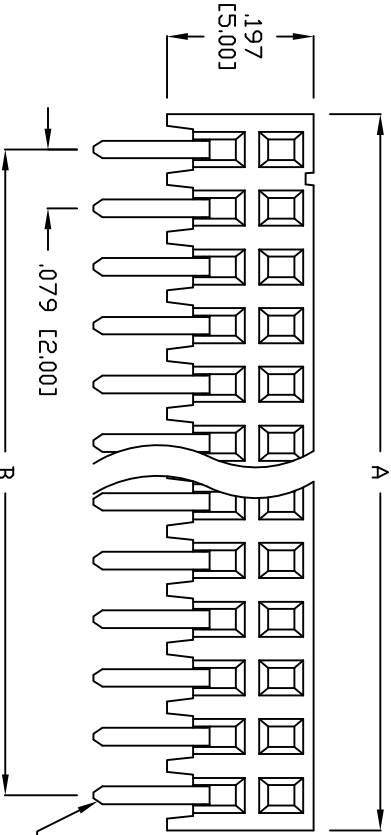
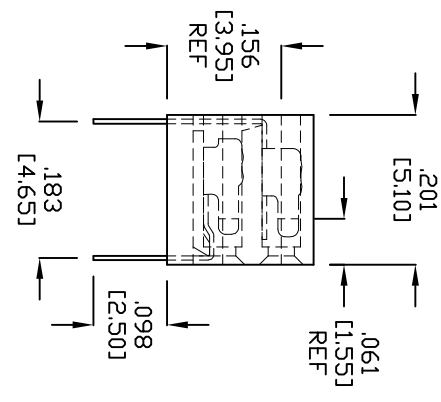


Rev	AWO #	Description	Date	Appr
-		RELEASED	2/10/11	

APPROVED: _____ TITLE: _____
 DATE: _____

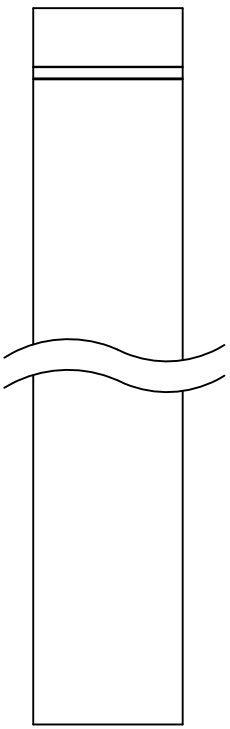

SPECIFICATIONS:

Material: Insulator: Nylon 6T, Rated UL 94V-0
 Insulator color: Black
 Contacts: Phosphor Bronze
 Plating: Gold flash over Nickel underplate overall
 Electrical: Current rating: 2 Amp max.
 Contact resistance: 20 mΩ max.
 Insulation resistance: 1000 MΩ min.
 Dielectric withstanding voltage: 500 VAC
 Environmental: Operating temperature: -40°C to +105°C
 Lead free, RoHS compliant.
 Recommended soldering temp: 260°C for 5 sec.

A = .079 [2.001] X No. of Positions + .016 [0.401]
 B = .079 [2.001] X No. of Spaces

UNLESS OTHERWISE SPECIFIED
 ALL DIMENSIONS ARE INCHES [MM]
 TOLERANCES: EXCEPT AS NOTED

INCHES	HOLES
.X ± .10	Ø.X ± .10
.XX ± .020	Ø.XX ± .015
.XXX ± .015	Ø.XXX ± .010

APPROVALS		DATE
DRAWN	AY	2/10/11
CHECKED	AH	2/10/11
APPROVED		

ADAM TECH
 909 Rahway Avenue, Union, NJ 07083
 Phone: 908-687-5000 Fax: 908-687-5710

TITLE: 2.00MM RECEPTACLE STRIP, DUAL ROW THRU-HOLE, GOLD PLATED

SIZE	PART NO	REV.
X	ZRS2BR-XX-G-HT	-

REF: S00032T SCALE: NTS SHEET 1 OF 1



6 5 4 3 2 1