


.050" (1.27 mm) ZIG-ZAG INLINE PACKAGE SOCKET



SPECIFICATION

- * Current Rating:
1 A
- * Withstanding Voltage:
800 VAC (1 min.)
- * Insulation Resistance:
1000 MΩ min.
- * Contact Resistance:
20 mΩ max.
- * Operating Temperature:
-40°C to +85°C

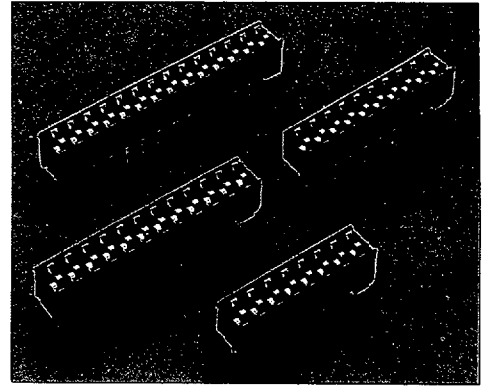


MATERIAL


- * Contact: Phosphor Bronze
- * Insulator: PBT & 30% G. F.
- * Plating: Tin plated

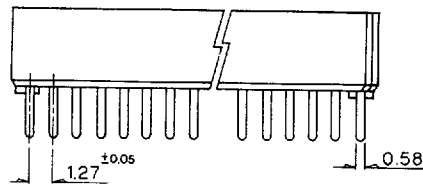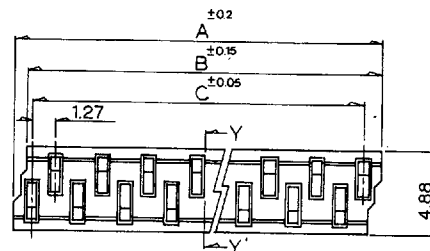

Y-Y' SECTION

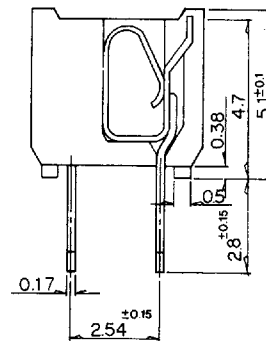

ORDER INFORMATION



POS	A	B	C
16	20.75	20.32	19.05
18	23.29	22.86	21.59
20	25.83	25.40	24.13
24	30.91	30.48	29.21
28	35.99	35.56	34.29

Specifications are subject to change without notice