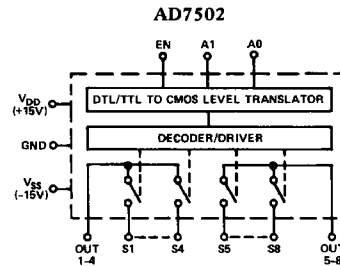



AD7501/AD7502/AD7503

FEATURES
DTL/TTL/CMOS Direct Interface
Power Dissipation: 30 μ W
R_{ON}: 170 Ω
Standard 16-Pin DIPs and 20-Terminal Surface Mount Packages
FUNCTIONAL BLOCK DIAGRAMS

GENERAL DESCRIPTION

The AD7501 and AD7503 are monolithic CMOS, 8-channel analog multiplexers which switches one of 8 inputs to a common output depending on the state of three binary address lines and an "enable" input. The AD7503 is identical to the AD7501 except its "enable" logic is inverted. All digital inputs are TTL/DTL and CMOS logic compatible.

The AD7502 is a monolithic CMOS dual 4-channel analog multiplexer. Depending on the state of 2 binary address inputs and an "enable", it switches two output buses to two of 8 inputs.

TRUTH TABLES

| AD7501 | | | | |
|----------------|----------------|----------------|----------------|------|
| A ₂ | A ₁ | A ₀ | E _N | "ON" |
| 0 | 0 | 0 | 1 | 1 |
| 0 | 0 | 1 | 1 | 2 |
| 0 | 1 | 0 | 1 | 3 |
| 0 | 1 | 1 | 1 | 4 |
| 1 | 0 | 0 | 1 | 5 |
| 1 | 0 | 1 | 1 | 6 |
| 1 | 1 | 0 | 1 | 7 |
| 1 | 1 | 1 | 1 | 8 |
| X | X | X | 0 | None |

| AD7503 | | | | |
|----------------|----------------|----------------|----------------|------|
| A ₂ | A ₁ | A ₀ | E _N | "ON" |
| 0 | 0 | 0 | 0 | 1 |
| 0 | 0 | 1 | 0 | 2 |
| 0 | 1 | 0 | 0 | 3 |
| 0 | 1 | 1 | 0 | 4 |
| 1 | 0 | 0 | 0 | 5 |
| 1 | 0 | 1 | 0 | 6 |
| 1 | 1 | 0 | 0 | 7 |
| 1 | 1 | 1 | 0 | 8 |
| X | X | X | 1 | None |

| AD7502 | | | |
|----------------|----------------|----------------|-------|
| A ₁ | A ₀ | E _N | "ON" |
| 0 | 0 | 1 | 1 & 5 |
| 0 | 1 | 1 | 2 & 6 |
| 1 | 0 | 1 | 3 & 7 |
| 1 | 1 | 1 | 4 & 8 |
| X | X | 0 | None |

AD7501/AD7502/AD7503 — SPECIFICATIONS ($V_{DD} = +15V$, $V_{SS} = -15V$ unless otherwise noted.)

| PARAMETER | VERSION ¹ | SWITCH CONDITION | @25°C | | OVER SPECIFIED TEMP. RANGE | | TEST CONDITIONS | |
|---|----------------------|------------------|--------------------|--------------------|----------------------------|-----------|--|------------------------|
| | | | AD7501, AD7503 | AD7502 | AD7501, AD7503 | AD7502 | | |
| ANALOG SWITCH | | | | | | | | |
| R_{ON} | All | ON | 170Ω typ, 300Ω max | * | | | $-10V < V_S < +10V$ $I_S = 1.0mA$ $V_S = 0V$, $I_S = 1.0mA$ | |
| R_{ON} vs. V_S | All | ON | 20% typ | * | | | | |
| R_{ON} vs. Temperature | All | ON | 0.5%/°C typ | * | | | | |
| ΔR_{ON} Between Switches | All | ON | 4% typ | * | | | | |
| R_{ON} vs. Temperature Between Switches | All | ON | ±0.01%/°C | * | | | | |
| I_S | K | OFF | 0.2nA typ, 2nA max | * | 50nA max | * | $V_S = -10V$, $V_{OUT} = +10V$ and $V_S = +10V$, $V_{OUT} = -10V$ | |
| | S | OFF | 0.5nA max | * | 50nA max | * | | |
| I_{OUT} | K | OFF | 1nA typ, 10nA max | 0.6nA typ, 5nA max | 250nA max | 125nA max | $V_S = -10V$, $V_{OUT} = +10V$ and $V_S = +10V$, $V_{OUT} = -10V$ AD7501/02: Enable LOW AD7503: Enable HIGH | |
| | S | OFF | 5nA max | 3nA max | 250nA max | 125nA max | | |
| $ I_{OUT} - I_S $ | K | ON | 12nA max | 7nA max | 300nA max | 175nA max | $V_S = 0$ | |
| | S | ON | 5.5nA max | 3.5nA max | 300nA max | 175nA max | | |
| DIGITAL CONTROL | | | | | | | | |
| V_{INL} | All | | | | 0.8V max | * | | |
| V_{DNH} | All | | | | 2.4V min | * | | |
| I_{INL} or I_{INH} | All | | 10nA typ | * | | | $V_{IN} = 0$ to $+5.0V$ (See Test Circuit 2) | |
| C_{IN} | All | | 3pF typ | * | | | | |
| DYNAMIC CHARACTERISTICS | | | | | | | | |
| t_{ON} | All | | 0.8μs typ | * | | | $V_{IN} = 0$ to $+5.0V$ (See Test Circuit 2) | |
| t_{OFF} | All | | 0.8μs typ | * | | | | |
| C_S | All | OFF | 5pF typ | * | | | | |
| C_{OUT} | All | OFF | 30pF typ | 15pF typ | | | | |
| C_{S-OUT} | All | OFF | 0.5pF typ | * | | | | |
| C_{SS} Between Any Two Switches | All | OFF | 0.5pF typ | * | | | | |
| POWER SUPPLY | | | | | | | | |
| I_{DD} | All | | 500μA max | * | 500μA max | * | | All Digital Inputs Low |
| I_{SS} | All | | 500μA max | * | 500μA max | * | | |
| I_{DD} | All | | 800μA max | * | 800μA max | * | All Digital Inputs High | |
| I_{SS} | All | | 800μA max | * | 800μA max | * | | |

NOTES

¹Same specifications as AD7501 and AD7503.

¹KN version specified for 0 to +70°C, KQ version for -25°C to +85°C, and SQ, SE versions for -55°C to +125°C.

Specifications subject to change without notice.

ABSOLUTE MAXIMUM RATINGS*

($T_A = +25^\circ C$ unless otherwise noted)

| | |
|--|---------------------|
| V_{DD} to GND | +17V |
| V_{SS} to GND | -17V |
| V Between Any Switch Terminals (see Note 1) | 25V |
| Digital Input Voltage Range | V_{DD} to GND |
| Overvoltage at V_{OUT} (V_S) | V_{SS} , V_{DD} |
| Switch Current (I_S , Continuous One Channel) | 35mA |
| Switch Current (I_S , Surge One Channel) | |
| 1ms Duration, 10% Duty Cycle | 50mA |
| Power Dissipation (Any Package) | |
| Up to +75°C | 450mW |
| Derates above +75°C by | 6mW/°C |

Operating Temperature

| | |
|-------------------------------------|-----------------|
| Commercial (KN Version) | 0 to +70°C |
| Industrial (KQ Version) | -25°C to +85°C |
| Extended (SQ, SE Versions) | -55°C to +125°C |
| Storage Temperature | -65°C to +150°C |
| Lead Temperature (Soldering, 10sec) | +300°C |

CAUTION

- Do not apply voltages higher than V_{DD} and V_{SS} to any other terminal, especially when $V_{SS} = V_{DD} = 0V$ all other pins should be at 0V.
- The digital control inputs are diode protected; however, permanent damage may occur on unconnected units under high energy electrostatic fields. Keep unused units in conductive foam at all times.

CAUTION:

ESD (electrostatic discharge) sensitive device. The digital control inputs are diode protected; however, permanent damage may occur on unconnected devices subject to high energy electrostatic fields. Unused devices must be stored in conductive foam or shunts. The protective foam should be discharged to the destination socket before devices are inserted.




AD7501/AD7502/AD7503

ORDERING GUIDE

| Model ¹ | Temperature Range | Package Option ² |
|--------------------|-------------------|-----------------------------|
| AD7501KN | 0°C to +70°C | N-16 |
| AD7501KQ | -25°C to +85°C | Q-16 |
| AD7501SQ | -55°C to +125°C | Q-16 |
| AD7501SE | -55°C to +125°C | E-20A |
| AD7502KN | 0°C to +70°C | N-16 |
| AD7502KQ | -25°C to +85°C | Q-16 |
| AD7502SQ | -55°C to +125°C | Q-16 |
| AD7502SE | -55°C to +125°C | E-20A |
| AD7503KN | 0°C to +70°C | N-16 |
| AD7503KQ | -25°C to +85°C | Q-16 |
| AD7503SQ | -55°C to +125°C | Q-16 |
| AD7503SE | -55°C to +125°C | E-20A |

PIN CONFIGURATIONS


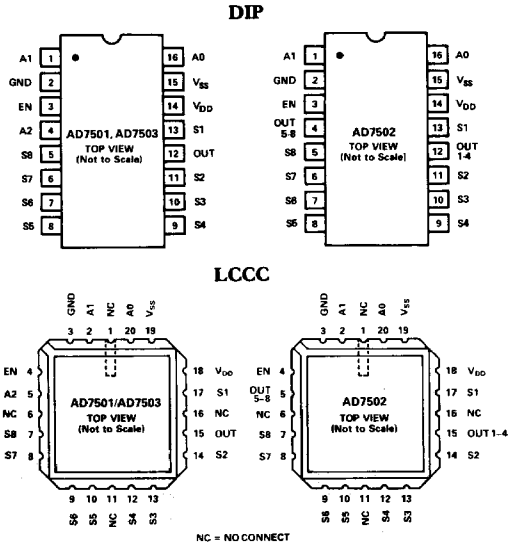


NOTES



¹To order MIL-STD-883, Class B processed parts, add/883B to part number.
²See the Analog Devices' 1990 Military Databook for military data sheet.
²E = Leadless Ceramic Chip Carrier; N = Narrow Plastic DIP; Q = Cerdip. For outline information see Package Information section.

Typical Performance Characteristics


1. R_{ON} Versus V_S

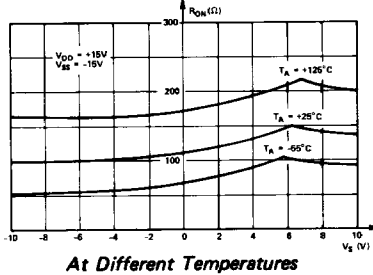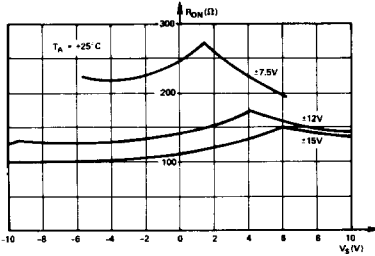


2. Digital Threshold Voltage (V_{INH}, V_{INL})

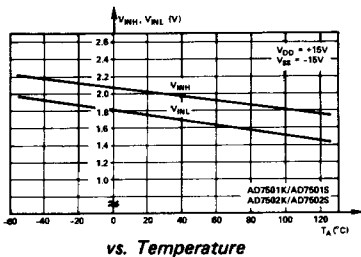

3. t_{ON}, t_{OFF}





4. Power Dissipation

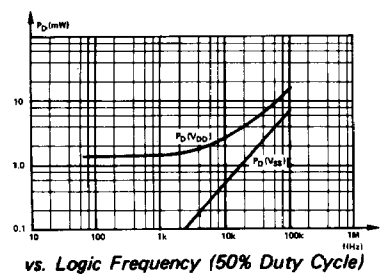

AD7501/AD7502/AD7503

TYPICAL SWITCHING CHARACTERISTICS

TEST CIRCUIT 1

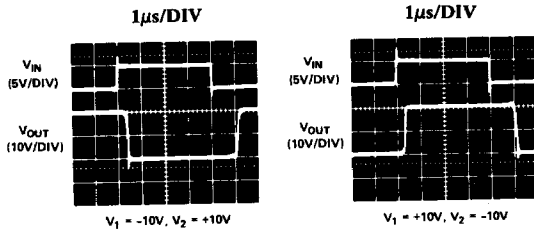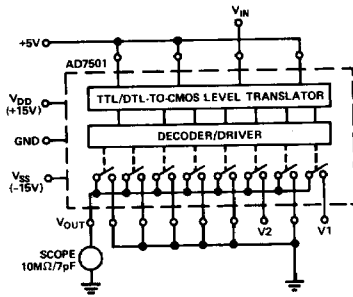

TEST CIRCUIT 2

