

# ACTIVE DELAY LINES, 5-TAP & 10-TAP THROUGH-HOLE & SURFACE MOUNT

**A08 SERIES: 8-Pin DIP**  
**A14 SERIES: 14-Pin DIP**  
**SA08 SERIES: 8-Pin SIP**  
**SMA14 SERIES: 14-Pin SO**



Term.W is  
 RoHS  
 compliant  
 & 260°C  
 compatible



- Economical cost
- A1405 popular values from stock!
- Wide selection, 20 - 1000nS
- Choice of 5 or 10 equally spaced taps
- TTL Schottky interfaced, TTL&DTL compatible

RCD's active delay lines have been designed to provide precise tap delays with all the necessary drive and pick-off circuitry. All inputs/outputs are schottky-type, requiring no additional components to achieve specified delays. Units are 100% inspected. Excellent for applications requiring high delay stability, fast rise times and no jitter, such as memory boards, disk drives, and signal processing. Application Guide available.

## OPTIONS

- Opt.T= trailing edge design
- Opt.F =fast TTL, H=HCMOS, C=FACT
- Opt.A = auto-insertable design
- Opt.ER = -55 to +125°C operating temp.
- Opt.39 = -40 to +85°C operating temp.
- Tighter tolerances, faster rise times
- Military screening

## TOTAL-DELAY TIMES (T<sub>D</sub>)

20nS, **25nS**, 30nS, 40nS, **45nS**, **50nS**,  
**60nS**, **75nS**, **100nS**, **125nS**, **150nS**,  
**200nS**, **250nS**, **300nS**, 350nS, 400nS,  
 450nS, **500nS**, 750nS, **1000nS**  
 (popular values listed in bold. Intermediate and extended range values available on special order).

## SPECIFICATIONS

Operating Temp: 0 to 70°C (opt.39= -40 to +85°C, opt.ER= -55 to +125°C)  
 Rise Time: 4nS max.  
 Delay Tol: ±2nS or ±5%, whichever greater  
 Tap Tol: ±2nS or 5%, whichever greater  
 Peak Soldering Temp: +230°C














## CHARACTERISTICS

RCD Type	Delay Range	No. of Taps	Delay per Tap
A0805	20nS - 500nS	5	20% TD
<b>A0805AG</b>	20nS - 500nS	5	20% TD
<b>A1405</b>	20nS -1000nS	5	20% TD
<b>A1405AG</b>	20nS -1000nS	5	20% TD
A1410	50nS -1000nS	10	10% TD
A1410AG	50nS -1000nS	10	10% TD
SA0805	20nS - 500nS	5	20% TD
SMA1405	20nS - 250nS	5	20% TD

Most popular models are listed in boldface. A1405AG is most popular SM model, A1405 is most popular thru-hole.

## TEST CONDITIONS @25°C

- 1.) Input test pulse voltage: 3.2V
- 2.) Input pulse width: 50nS or 1.2x the total delay (whichever is greater)
- 3.) Input rise time: 2.0nS (0.75V to 2.4V)
- 4.) Delay measured at 1.5V on leading edge only with no loads on output (specify opt. T for trailing edge design)
- 5.) Supply Voltage (Vcc): 5V
- 6.) Pulse spacing: 2x pulse width min.

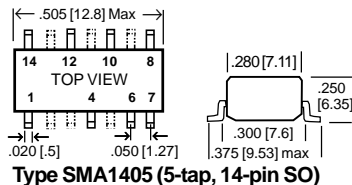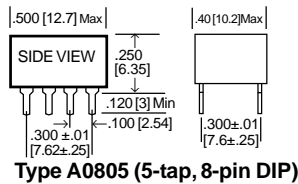

## P/N DESIGNATION:

**Type:** A0805, A0805AG, A1405, A1405AG, A1410, A1410AG, SMA1405, SA0805

**Options:** T, H, F, ER, C, A, 39 (leave blank if std.)

**Delay Time:** 20NS, 25NS, 100NS, etc.

**Packaging:** B=Bulk (magazine tube std), T=Tape & Reel (SM1405 only)

**Termination:** W=Lead-free, Q=Tin/Lead (leave blank if either is acceptable)

**A0805**  - **100NS** - **B** **W**