


TA Series Non-Inductive Metallized Polyester Film For AC Circuits


- For AC circuits
- Non-inductive construction
- Flame retardant epoxy resin coating
- Self-healing property
- Across the line and line bypass component
- Applications : Noise suppressor for audio, video, TV, monitor, computer, refrigerator etc.
Power supplier and industrial equipment with high reliability



Item	Characteristics			
Operating temperature range	-40 ~ +85°C			
Capacitance tolerance	±10%(K), ±20%(M) at 1kHz, 20°C			
Dissipation factor	0.01 max. at 1kHz, 20°C			
Insulation resistance	C ≤ 0.33μF : 15000 MΩ min., C > 0.33μF : 5000 ΩF min.			
Withstand voltage	Test voltage	WV × 4.3VDC	1500VDC	2000VAC
	Terminal to terminal	60 s	1~5 s	—
	Terminal to coating	—	—	60 s

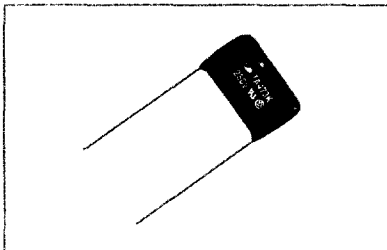

● DRAWING

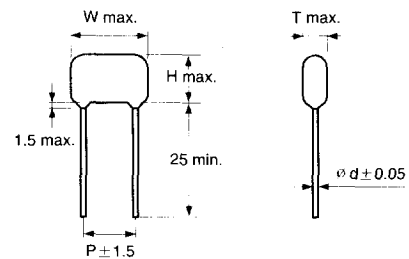

● DIMENSIONS

Unit : mm

μF	WV Code	125, 250 VAC				
		T	W	H	P	ø d
0.0047		6.5	14.5	10.0	12.5	0.6
0.0056		6.5	14.5	10.5	12.5	0.6
0.0068		7.0	14.5	11.0	12.5	0.6
0.0082		6.5	14.5	10.0	12.5	0.6
0.01		6.5	14.5	10.5	12.5	0.6
0.012		7.0	14.5	11.0	12.5	0.6
0.015		7.5	14.5	11.5	12.5	0.6
0.018		8.0	14.5	12.0	12.5	0.6
0.022		6.5	19.5	10.0	17.5	0.6
0.027		6.5	19.5	11.0	17.5	0.6
0.033		7.0	19.5	11.5	17.5	0.6
0.039		7.0	19.5	12.0	17.5	0.6
0.047		8.0	19.5	12.5	17.5	0.6
0.056		8.0	19.5	14.0	17.5	0.6
0.068		8.5	19.5	14.5	17.5	0.6
0.082		9.5	19.5	15.0	17.5	0.6
0.1		8.5	25.5	15.0	22.5	0.8
0.12		9.0	25.5	15.5	22.5	0.8
0.15		9.5	25.5	16.5	22.5	0.8
0.18		10.5	25.5	17.0	22.5	0.8
0.22		10.0	30.5	17.0	27.5	0.8
0.27		11.0	30.5	18.0	27.5	0.8
0.33		12.0	30.5	19.0	27.5	0.8
0.39		13.0	30.5	20.0	27.5	0.8
0.47		13.5	30.5	22.0	27.5	0.8