


# Coaxial Cable Assemblies and Breakouts

## Pomona®



Cable length is measured from the inside edges of the connectors.  
All dimensions are in inches unless otherwise noted.

### BNC MALE TO TYPE 'N' MALE, 50 OHM CABLE



Pomona ACCESS	Part No.	Length	PRICE
90506	1366-C-24	24"	16.80
	1366-C-36	36"	16.80
	1366-C-48	48"	17.85

RATING: 500 VRMS Max., +80°C (+176°F) Max.  
CABLE TYPE: 50Ω, RG58C/U, .195" O.D.  
MATERIAL: BNC: See Model BNC-C (p. 34),  
Type 'N': See Model 2256 (right)

### TYPE 'N' MALE 50 OHM CABLE



Pomona ACCESS	Part No.	Cable Type	Length	PRICE
90135	2256-X-24	50Ω, RG142B/U, .100" O.D.	24"	40.00
	2256-X-36	Double Shield	36"	40.00
	2256-X-48	Rating +200°C Max.	48"	49.00
	2256-X-60		60"	49.00
	2256-C-24	50Ω, RG58C/U, .195" O.D.	24"	19.80
	2256-C-36		36"	19.80
	2256-C-48	Rating +80°C Max.	48"	21.15
	2256-C-60		60"	21.15

Type 'N': Body: White Bronze Plated Brass  
Center Contact: Gold Plated Brass

### TYPE 'N' MALE 50 OHM CABLE



Pomona ACCESS	Part No.	Length	PRICE
90124	1658-T-18	18"	40.00
	1658-T-24	24"	40.00
	1658-T-36	36"	40.00
	1658-T-48	48"	61.00
	1658-T-60	60"	61.00

RATING: 1000 VRMS Max., +80°C (+176°F) Max.  
CABLE TYPE: 50Ω, RG 214/U, .425" O.D.,  
Double Shield  
Type 'N' Connector materials same as Model  
2256 above right.

### BNC MALE TO TNC MALE, 50 OHM CABLE



Pomona ACCESS	Part No.	Length	PRICE
90817	1948-C-12	12"	18.65
	1948-C-24	24"	18.65
	1948-C-36	36"	18.65
	1948-C-48	48"	19.95
	1948-C-60	60"	19.95

RATING: 500 VRMS Max., +80°C (+176°F) Max.  
CABLE TYPE: 50Ω, RG58C/U, .195" O.D.  
BNC/TNC: Body: Brass, Tarnish Resistant Plating  
Contact: Gold Plated Brass


### PHONO PLUG CABLE WITH MOLDED STRAIN RELIEF



Pomona ACCESS	Part No.	Length	PRICE
90820	5092-K-18	18"	16.55
	5092-K-24	24"	16.55
	5092-K-36	36"	16.55
	5092-K-48	48"	17.45

RATING: 500 VRMS, +50°C (+122°F) Max.  
CABLE TYPE: 50Ω, RG174/U, .100" O.D.

### PHONO PLUG TO BNC MALE WITH MOLDED STRAIN RELIEF

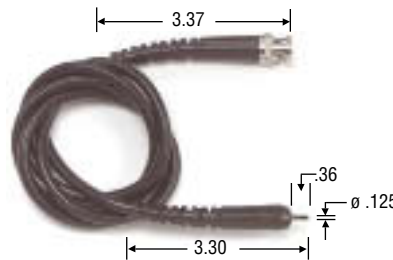

Pomona ACCESS	Part No.	Length	PRICE
90610	4963-E-24	24"	13.20
	4963-E-36	36"	13.80
	4963-E-48	48"	14.50
	4963-E-60	60"	15.15

RATING: 500 VRMS, +50°C (+122°F) Max.  
CABLE TYPE: 75Ω, RG59B/U, .242" O.D.  
BNC Connector and strain relief materials  
same as 2249-C (p. 33).


### TRIAxIAL MALE CABLES



Pomona ACCESS	Part No.	Length	Cable Type	#Lugs	PRICE
90627	3581-CC-18	18"			53.00
	3581-CC-24	24"			53.00
	3581-CC-36	36"	Twinaxial	2	53.00
	3581-CC-48	48"			54.00
	3581-CC-60	60"			54.00
	5223-36	36"	Triaxial	2	74.00
	5223-60	60"			78.00
	5054-36	36"	Triaxial	3	74.00
	5054-60	60"			79.00

RATING: 500 VRMS, +80°C (+176°F) Max.  
Triaxial: Body/Fittings: Brass, Tarnish Resistant Plating  
Intermediate and Center Contacts:  
Gold Plated Brass  
Triaxial to BNC Adapters on page 55.

### TRIAxIAL MALE TO THREE ALLIGATOR TEST CLIPS

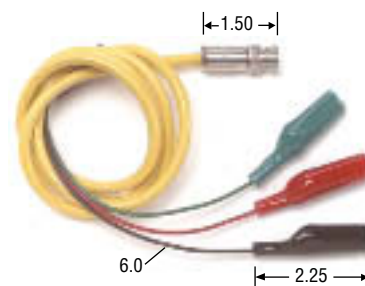

Pomona ACCESS	Model	Special Features	PRICE
90400	4725	2 Lug Triax.	72.00
	5342	3 Lug Triax.	81.00

RATING: 150 VRMS, +50°C (+122°F) Max.  
Jaws open to 300" Max.  
36" Cable  
Triaxial: Body/Fittings: Brass, Tarnish Resistant Plating  
Intermediate and Center Contacts:  
Gold Plated Brass