




## PIN HEADERS

- Industry compatible
- Competitively priced
- Various plating contacts available
- 1.27mm pitch
- Various pin lengths available

## DUAL ROW STRAIGHT 1.27MM

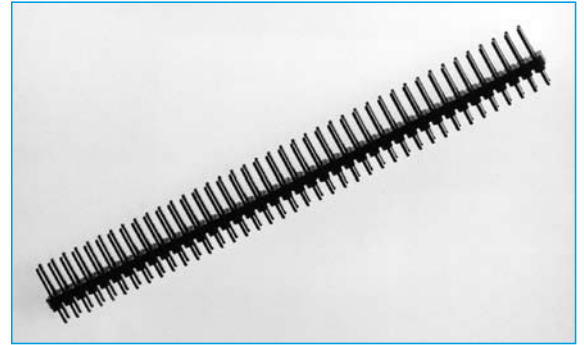


SECTION 8

## SPECIFICATION


### Material & Finish

<b>Contact Material:</b>	Brass
<b>Insulator Material:</b>	PBT & Glass-Fibre Reinforced UL94V-0
<b>Current Rating:</b>	1 A DC
<b>Contact Resistance:</b>	30M $\Omega$ Max at 6V DC 0.3A
<b>Insulator Resistance:</b>	1000M $\Omega$ Min at 500V DC
<b>Dielectric Withstanding Voltage:</b>	500V AC for One Minute
<b>Operating Temperature:</b>	-40°C to + 105°C

## OUTLINE DRAWING

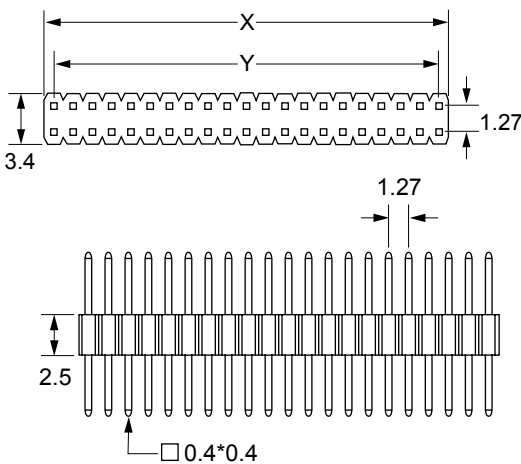

x	1.27 * Position No.
y	1.27 * (Position No.1)

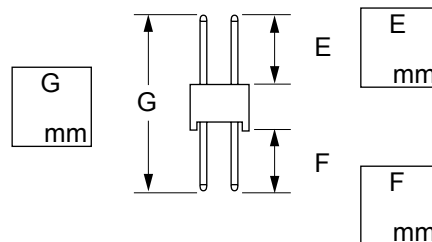

## ORDERING INFORMATION

<b>DBC</b> Dubilier Connectors	<b>PH</b> Pin Header Connector	<b>C11</b> Series	<b>04</b> No. of Contacts /Per Row  02 = 2x2way thro to 40 = 40x2way	<b>A</b> Contact Material  A = Brass	<b>G</b> Contact plating  G = Gold Plating S = Selective T = Tin Plating * = Other plating available	<b>1</b> Colour  1 = Black	<b>-XXX</b> Unique Special Code * See Below
-----------------------------------	-----------------------------------	----------------------	----------------------------------------------------------------------------------	-----------------------------------------------	------------------------------------------------------------------------------------------------------------------------	-------------------------------------	---------------------------------------------------

\* Dubilier will allocate a special code to distinguish special pin lengths