


Mini Style QD Cordsets

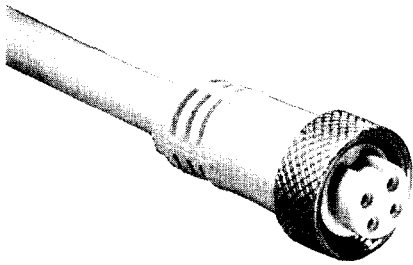

4-Pin Straight Mini Cordset


Specifications

Coupling Nut	Epoxy-Coated Zinc
Connector	Molded oil-resistant PVC
Contacts	Gold-plated palladium/nickel
Cable	Oil-resistant yellow PVC jacket, 16AWG stranded copper, 600V, UL recognized and CSA certified, STOOW-A
Cable O.D.	3/c = 10mm (0.41in) 4/c = 11mm (0.42in) 5/c = 13mm (0.50in) 6/c = 14mm (0.54in)
Temperature	-20°C to +105°C (-4°F to +221°F)

Features

- UL recognized and CSA certified
- Heavy duty STOOW-A 16AWG cable
- Highly visible yellow PVC jacket offers good oil and chemical resistance
- One-piece molded body design

Dimensions—mm (in)

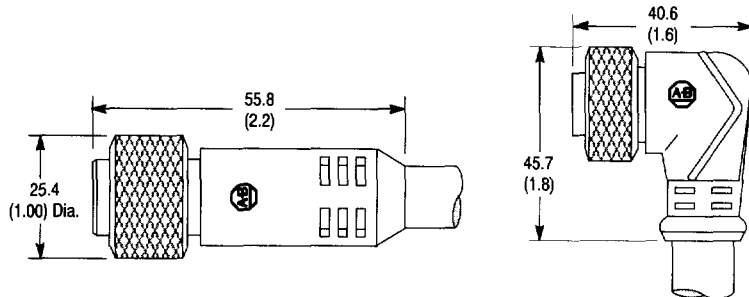

Straight Female

Right Angle Female

Dimensions are approximate. Illustrations are not drawn to scale.

Selection Guide



Female Connector (Sensor End)	Cable			Catalog Number						
	Face View of Female	Wire Color	Wire Rating	Length—m (ft)	Straight	Right Angle				
	1 Green 2 Black 3 White	16AWG 600V 13A	1.8 (6)	889N-F3AFC-6F	889N-R3AFC-6F					
			3.7 (12)	889N-F3AFC-12F	889N-R3AFC-12F					
			6.1 (20)	889N-F3AFC-20F	889N-R3AFC-20F					
	1 Black 2 Blue 3 Brown 4 White	16AWG 600V 10A	1.8 (6)	889N-F4AF-6F	889N-R4AF-6F					
			3.7 (12)	889N-F4AF-12F	889N-R4AF-12F					
			6.1 (20)	889N-F4AF-20F	889N-R4AF-20F					
			1.8 (6)	889N-F4AFC-6F	889N-R4AFC-6F					
			3.7 (12)	889N-F4AFC-12F	889N-R4AFC-12F					
			6.1 (20)	889N-F4AFC-20F	889N-R4AFC-20F					
	1 Black 2 Blue 3 Orange 4 Brown 5 White	16AWG 600V 8A	1.8 (6)	889N-F5AF-6F	889N-R5AF-6F					
			3.7 (12)	889N-F5AF-12F	889N-R5AF-12F					
			6.1 (20)	889N-F5AF-20F	889N-R5AF-20F					
			1.8 (6)	889N-F5AFC-6F	889N-R5AFC-6F					
			3.7 (12)	889N-F5AFC-12F	889N-R5AFC-12F					
			6.1 (20)	889N-F5AFC-20F	889N-R5AFC-20F					
				1 Blue 2 Orange 3 Red 4 White 5 Brown 6 Black		3.7 (12)	889N-F6AFC-12F	—		
						1 Orange 2 Blue 3 Black	4 White 5 Red 6 Green	5 (16.4)	889N-F6AF-5	—
								10 (32.8)	889N-F6AF-10	—