

C-III Varistor Series



The C-III Series of metal-oxide varistors are specifically designed for high surge energy absorption ratings. This is achieved through a special dielectric material formulation which also results in higher repetitive surge ratings than other MOV types.

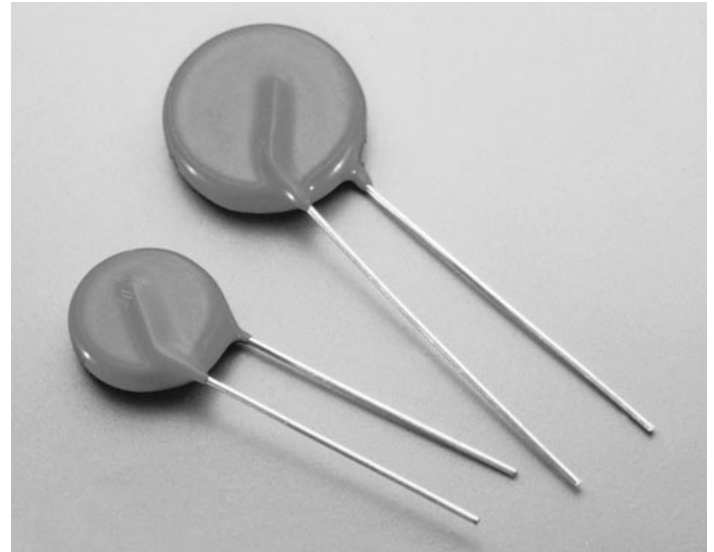
The C-III series is primarily intended for use in AC line Transient Voltage Surge Suppressor (TVSS) product environment and other similar applications requiring high transient energy and peak current capability in a relatively small package size.

The C-III series is supplied in 14 and 20mm disc versions with various lead options.

These types are shipped in bulk or Tape and Reel packaging. Part number and brand information is provided in the Ratings table.

Features

- High Energy Absorption Capability
 W_{TM} 45J to 210J
 (2ms)
- High Pulse Life Rating
- High Peak Pulse Current Capability
 I_{TM} 6000A to 9000A
 (8/20 μ s)
- Wide Operating Voltage Range
 $V_{M(AC)RMS}$ 130V to 320V
- Available in Tape and Reel for Automatic Insertion; Also Available with Crimped and/or Trimmed Lead Styles
- No Derating Up to 85°C Ambient



AGENCY APPROVALS: Recognized under the components program of Underwriters Laboratories. Certified by CSA, VDE and CECC.

AGENCY FILE NUMBERS: UL E75961, CSA LR91788, VDE 116895E, CECC 42201-006.

**ALSO SEE LITTELFUSE
 ULTRAMOV™ VARISTOR SERIES**

C-III Varistor Series

Absolute Maximum Ratings For ratings of individual members of a series, see Device Ratings and Specifications chart

	C-III SERIES	UNITS
Continuous:		
Steady State AC Voltage Range ($V_{M(AC)RMS}$)	130 to 320	V
Transients:		
Single-Pulse Peak Current (I_{TM}) 8/20 μ s Wave (See Figure 2)	6000 to 9000	A
Single-Pulse Energy Range (W_{TM}) 2ms Rectangular Wave	45 to 210	J
Maximum Temporary Overvoltage of $V_{M(AC)}$:		
5 Minutes Duration @ 25°C	130	%
5 Minutes Duration @ 125°C	120	%
Operating Ambient Temperature Range (T_A)	-55 to 85	°C
Storage Temperature Range (T_{STG})	-55 to 125	°C
Temperature Coefficient (α_V) of Clamping Voltage (V_C) at Specified Test Current	<0.01	%/°C

CAUTION: Stresses above those listed in "Absolute Maximum Ratings" may cause permanent damage to the device. This is a stress only rating and operation of the device at these or any other conditions above those indicated in the operational sections of this specification is not implied.

C-III Series Ratings

PART NUMBER	BRAND	MAXIMUM RATINGS (85°C)			
		MAXIMUM V_{RMS} $V_{M(AC)}$ (V)	WITHSTANDING ENERGY (2ms) W_{TM} (μ J) (J)	TRANSIENT	
				PEAK CURRENT (8/20 μ s)	
				I_{TM1} 1 PULSE (A)	I_{TM2} 2 PULSES (A)
V130LA10C V130LA20C V130LA20CX325	130L10C 130L20C 130CX325	130 130 130	45 90 90	6000 9000 9000	5000 7000 7000
V140LA10C V140LA20C V140LA20CX340	140L10C 140L20C 140CX340	140 140 140	50 100 100	6000 9000 9000	5000 7000 7000
V150LA10C V150LA20C V150LA20CX360	150L10C 150L20C 150CX360	150 150 150	55 110 110	6000 9000 9000	5000 7000 7000
V175LA10C V175LA20C V175LA20CX425	175L10C 175L20C 175CX425	175 175 175	60 120 120	6000 9000 9000	5000 7000 7000
V230LA20C V230LA40C V230LA40CX570	230L20C 230L40C 230X570	230 230 230	80 160 160	6000 9000 9000	5000 7000 7000
V250LA20C V250LA40C V250LA40CX620	250L20C 250L40C 250CX620	250 250 250	100 170 170	6000 9000 9000	5000 7000 7000
V275LA20C V275LA40C V275LA40CX680	275L20C 275L40C 275CX680	275 275 275	110 190 190	6000 9000 9000	5000 7000 7000
V300LA20C V300LA40C V300LA40CX745	300L20C 300L40C 300CX745	300 300 300	120 210 210	6000 9000 9000	5000 7000 7000
V320LA20C V320LA40C	320L20C 320L40C	320 320	130 220	6000 9000	5000 7000

C-III Varistor Series

C-III Series Specifications

PART NUMBER	MODEL SIZE DISC DIAMETER (mm)	SPECIFICATIONS (25°C)					
		VARISTOR VOLTAGE AT 1mA DC TEST CURRENT		MAXIMUM CLAMPING VOLTAGE (8/20µs)		DUTY CYCLE SURGE RATING	
		V _N MIN (V)	V _N MAX (V)	V _C (V)	I _p (A)	3kA (8/20µs) # PULSES	750A (8/20µs) # PULSES
V130LA10C	14	184	228	340	50	10	80
V130LA20C	20	184	228	340	100	20	120
V130LA20CX325	20	184	220	325	100	20	120
V140LA10C	14	198	242	360	50	10	80
V140LA20C	20	198	242	360	100	20	120
V140LA20CX340	20	198	230	340	100	20	120
V150LA10C	14	212	268	395	50	10	80
V150LA20C	20	212	268	395	100	20	120
V150LA20CX360	20	212	243	360	100	20	120
V175LA10C	14	247	303	455	50	10	80
V175LA20C	20	247	303	455	100	20	120
V175LA20CX425	20	247	285	425	100	20	120
V230LA20C	14	324	396	595	50	10	80
V230LA40C	20	324	396	595	100	20	120
V230LA40CX570	20	324	384	570	100	20	120
V250LA20C	14	354	429	650	50	10	80
V250LA40C	20	354	429	650	100	20	120
V250LA40CX620	20	354	413	620	100	20	120
V275LA20C	14	389	473	710	50	10	80
V275LA40C	20	389	473	710	100	20	120
V275LA40CX680	20	389	453	680	100	20	120
V300LA20C	14	420	517	775	50	10	80
V300LA40C	20	420	517	775	100	20	120
V300LA40CX745	20	420	490	745	100	20	120
V320LA20C	14	462	565	850	50	10	80
V320LA40C	20	462	565	850	100	20	120

NOTE: Average power dissipation of transients not to exceed 0.6W and 1W for model sizes 14mm and 20mm, respectively.

Power Dissipation Ratings

Should transients occur in rapid succession, the average power dissipation is the energy (watt-seconds) per pulse times the number of pulses per second. The power so developed must be within the specifications shown on the Device Ratings and Specifications table for the specific device. The operating values of a MOV need to be derated at high temperatures as shown in Figure 1. Because varistors only dissipate a relatively small amount of average power they are not suitable for repetitive applications that involve substantial amounts of average power dissipation.


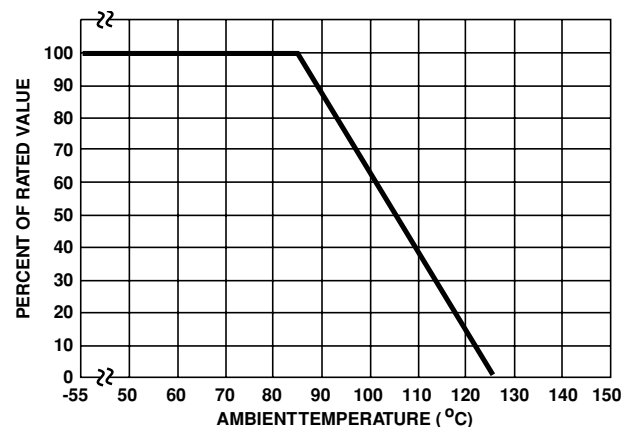


FIGURE 1. CURRENT, ENERGY AND POWER DERATING CURVE

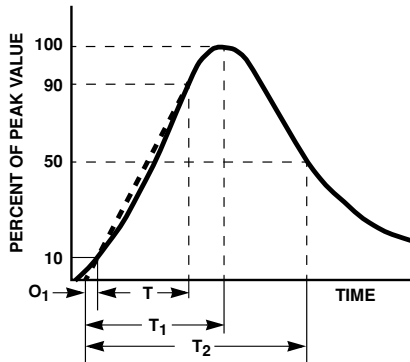C-III Varistor Series



O_1 = Virtual Origin of Wave
 T = Time From 10% to 90% of Peak
 T_1 = Virtual Front time = $1.25 \cdot t$
 T_2 = Virtual Time to Half Value (Impulse Duration)
 Example: For an $8/20\mu s$ Current Waveform:
 $8\mu s = T_1$ = Virtual Front Time
 $20\mu s = T_2$ = Virtual Time to Half Value

FIGURE 2. PEAK PULSE CURRENT TEST WAVEFORM

Transient V-I Characteristics Curves

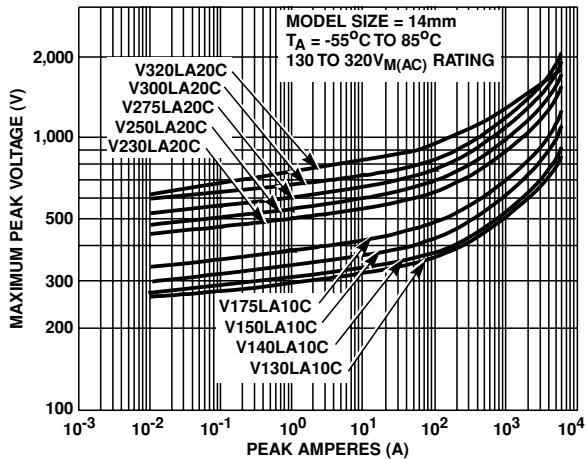


FIGURE 3. MAXIMUM CLAMPING VOLTAGE FOR V130LA10C TO V320LA20C

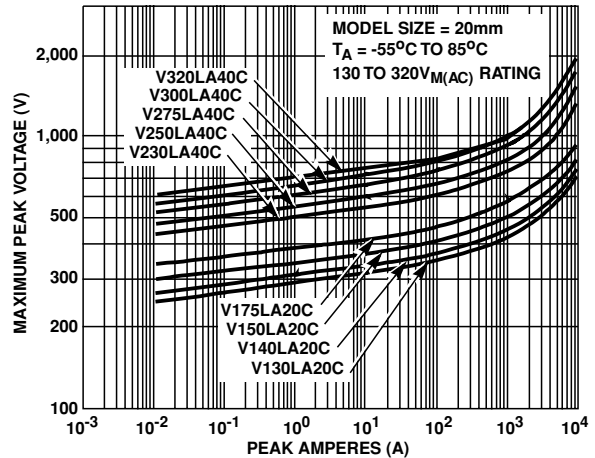


FIGURE 4. MAXIMUM CLAMPING VOLTAGE FOR V130LA20C TO V320LA40C

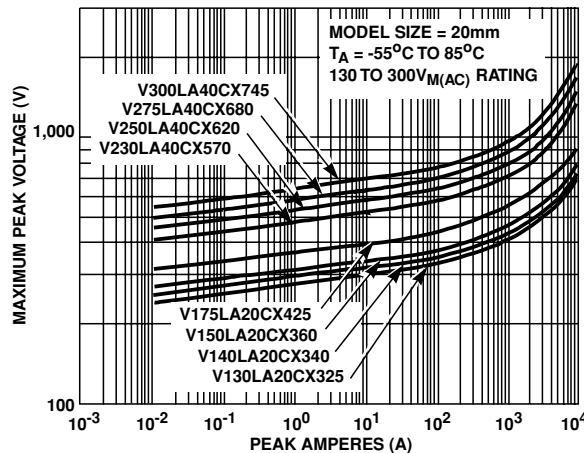


FIGURE 5. MAXIMUM CLAMPING VOLTAGE FOR V130LA20CX325 TO V300LACX745

C-III Varistor Series

Pulse Rating Curves

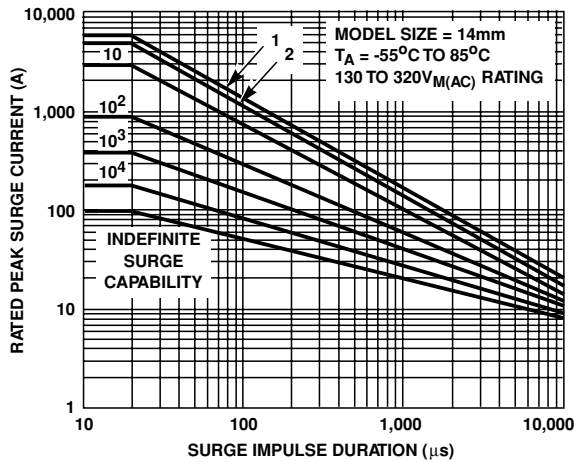


FIGURE 6. REPETITIVE SURGE CAPABILITY FOR V130LA10CTO V320LA20C


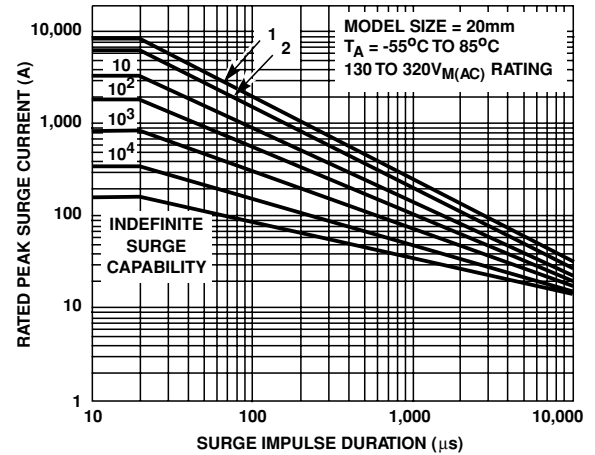


FIGURE 7. REPETITIVE SURGE CAPABILITY FOR V130LA20CTO V320LA40C

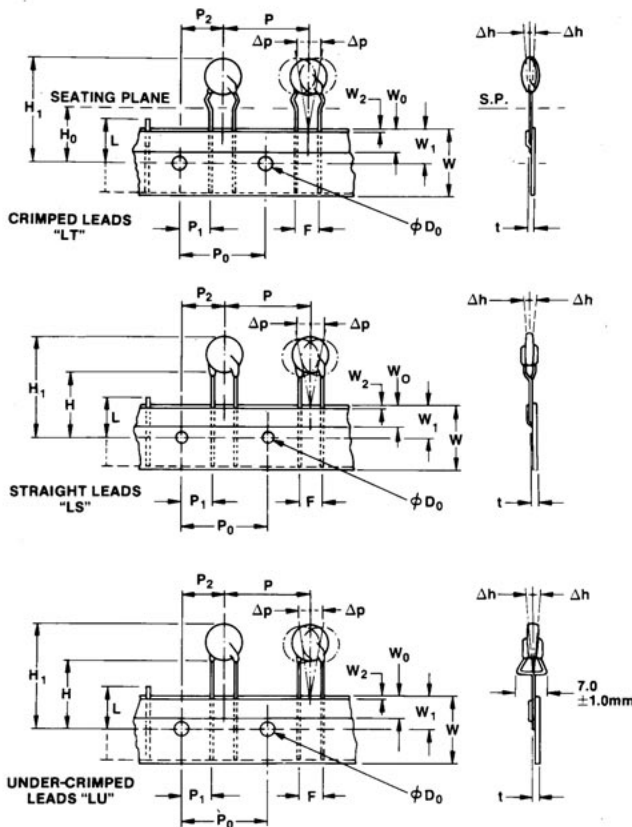Tape and Reel Specification



SYMBOL	DESCRIPTION	MODEL SIZE	
		14mm	20mm
P	Pitch of Component	25.4 ± 1.0	
P ₀	Feed Hole Pitch	12.7 ± 0.2	
P ₁	Feed Hole Center to Pitch	2.60 ± 0.7	
P ₂	Hole Center to Component Center	6.35 ± 1.0	
F	Lead to Lead Distance	7.50 ± 0.8	
h	Component Alignment	2.00 Max	
W	Tape Width	18.25 ± 0.75	
W ₀	Hold Down Tape Width	6.00 ± 0.3	12.0 ± 0.3
W ₁	Hole Position	9.125 ± 0.625	
W ₂	Hold Down Tape Position	0.5 Max	
H	Height From Tape Center To Component Base	19.0 ± 1.0	
H ₀	Seating Plane Height	16.0 ± 0.5	
H ₁	Component Height	40 Max	46.5 Max
D ₀	Feed Hole Diameter	4.0 ± 0.2	
t	Total Tape Thickness	0.7 ± 0.2	
L	Length of Clipped Lead	12.0 Max	
p	Component Alignment	3° Max	

C-III Varistor Series

Tape and Reel Data

- Conforms to ANSI and EIA Specifications
- Can be supplied to IEC publication 286-2
- Radial devices on tape and reel are supplied with either crimped leads, straight leads, or under-crimped leads

Tape and Reel Ordering Information


- Crimped leads are standard on LA types supplied in tape and reel and are denoted by the model letter "T". Also, in tape and reel, model letter "S" denotes straight leads and letter "U" denotes special under-crimped leads.

Example:

STANDARD MODEL	CRIMPED LEADS	STRAIGHT LEADS	UNDER CRIMP LEADS
V130LA20C	V130LT20C	V130LS20C	V130LU20C

Shipping Quantity

DEVICE SIZE	QUANTITY PER REEL		
	"T" REEL	"S" REEL	"U" REEL
14mm	500	500	500
20mm	500	500	500

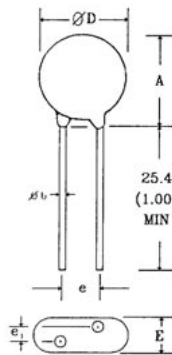

SYMBOL	VRMS VOLTAGE MODEL	VARISTOR MODEL SIZE			
		14mm		20mm	
		MIN	MAX	MIN	MAX
A	ALL	13.5 (0.531)	20 (0.787)	17.5 (0.689)	26.5 (1.043)
ØD	ALL	13.5 (0.531)	17 (0.669)	17.5 (0.689)	23 (0.906)
e	ALL	6.5 (0.256)	8.5 (0.335)	6.5 (0.256)	8.5 (0.335)
e1	130 - 250 275 - 550	2.5 (0.098) 4.5 (0.177)	5.5 (0.216) 9.0 (0.354)	2.5 (0.098) 4.5 (0.177)	5.5 (0.216) 9.0 (0.354)
E	130 - 250 275 - 550	- -	7.3 (0.287) 11 (0.433)	- -	7.3 (0.287) 11 (0.433)
Øb	ALL	0.76 (0.030)	0.86 (0.034)	0.76 (0.030)	0.86 (0.034)


Dimensions are in millimeters (inches)
NOTE: 10mm lead spacing also available. See additional lead style options.

Additional Lead Style Options

Radial lead types can be supplied with combination preformed crimp and trimmed leads. This option is supplied to the dimensions shown below.

SYMBOL	VARISTOR MODEL SIZE			
	14mm		20mm	
	MIN	MAX	MIN	MAX
A	-	24.5 (0.96)	-	31 (1.22)
LTRIM	2.41 (0.095)	4.69 (0.185)	2.41 (0.095)	4.69 (0.185)

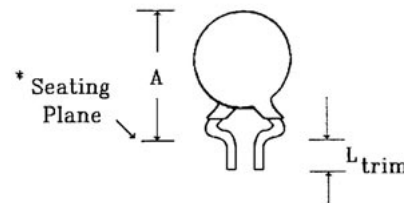NOTE: Dimensions are in millimeters (inches).



CRIMPED AND TRIMMED LEAD

*Seating plane interpretation per IEC-717

- To order this crimped and trimmed lead style, the standard radial type model number "LA" is changed to the model number "LC". This option is supplied in bulk only.

Example:

STANDARD MODEL	ORDER AS
V130LA20C	V130LC20C

- For 10 ± 1mm lead spacing on 20mm units only; append standard model numbers by adding "X10" suffix.

STANDARD MODEL	ORDER AS
V130LA20C	V130LC20C

Example:

- For other lead style variations to the above, please contact Littelfuse.

Reliability Performance of C-III Series

The electrical ratings of the C-III series of MOVs are conservatively stated. Samples of these devices have been tested under additional stresses, over and above those called out in the data sheet. The results of this testing show an enhanced device performance.

The series of stress tests to which the units were subjected are a combination of electrical, environmental and mechanical tests. A summary of the reliability tests performed on the C-III series are described in Table 1.

C-III Varistor Series

TEST	REFERENCE STANDARD	TEST CONDITIONS	TEST RESULTS
Surge Current	UL 1449 IEEE/ANSI C62.41 IEC 1051	9000A (8/20 μ s) 1 Pulse	0/165
		7000A (8/20 μ s) 2 Pulses	0/105
		3000A (8/20 μ s) 20 Pulses	0/75
		750A (8/20 μ s) 120 Pulses	0/65
Surge Energy	UL 1449 IEEE/ANSI C62.41 IEC 1051	90J (2ms) 1 Pulse	0/125
Operating Life	Mil-Std-202 Method 204D	125 $^{\circ}$ C, 1000 Hours, Rated Bias Voltage	0/180
Temporary Overvoltage	N/A	120% Maximum Rated Varistor Voltage For 5 Minutes	0/70

TABLE 1.

AC Bias Reliability

The C-III series of metal oxide varistors was designed for use on the AC line. The varistor is connected across the AC line and is biased with a constant amplitude sinusoidal voltage. It should be noted that the definition of failure is a shift in the nominal varistor voltage (V_N) exceeding $\pm 10\%$. Although this type of varistor is still functioning normally after this magnitude of shift, devices at the lower extremities of V_N tolerance will begin to dissipate more power.

Because of this possibility, an extensive series of statistically designed tests were performed to determine the reliability of the C-III type of varistor under AC bias combined with high levels of temperature stress. To date, this test has generated over 50,000 device hours of operation at a temperature of 125 $^{\circ}$ C, although only rated at 85 $^{\circ}$ C. Changes in the nominal varistor voltage, measured at 1mA, of less than 2% have been recorded (Figure 8).




Transient Surge Current/Energy Transient Capability

The transient surge rating serves as an excellent figure of merit for the C-III varistor. This inherent surge handling capability is one of the C-III varistor's best features. The enhanced surge absorption capability results from improved process uniformity and enhanced construction. The homogeneity of the raw material powder and improved control over the sintering and assembly processes are contributing factors to this improvement.

In the low power AC mains environment, industry standards (UL, IEC, NEMA and IEEE) all suggest that the worst case surge occurrence will be 3kA. Such a transient event may occur up to five times over the equipment life time (approximately 10 years). While the occurrences of five 3kA transients is the required capability, the conservatively rated, repetitive

Additionally, all 20mm C-III devices are listed to the "Permanently Connected" category (10kA) of UL1449, by Underwriter's Laboratories, Inc.

As a measure of the inherent device capability, samples of the 20mm V130LA20C devices were subjected to a worst case repetitive transient surges test. After 100 pulses, each of 3kA, there was negligible change in the device characteristics. Changes in the clamping voltage, measured at 100 amps, of less than 3% were recorded (Figure 9). Samples of the 14mm Series V175LA20C were subjected to repetitive surge occurrences of 750A. Again, there was negligible changes in any of the device characteristics after 250 pulses (Figure 10). In both cases the inherent device capability is far in excess of the expected worst case scenario.

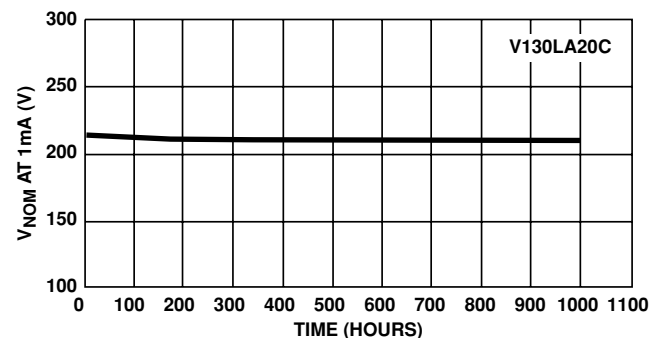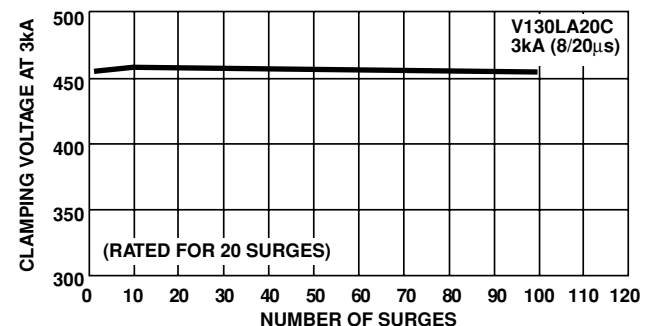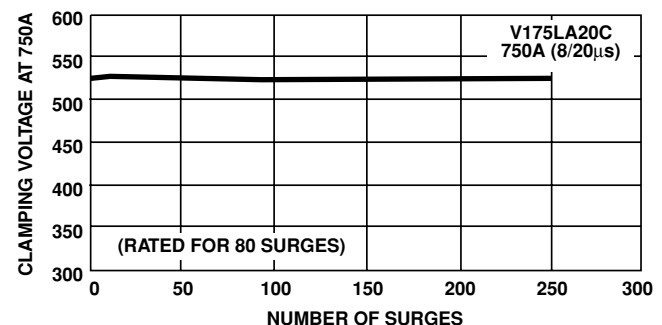
FIGURE 8. HIGH TEMPERATURE OPERATING LIFE 125 $^{\circ}$ C FOR 1000 HOURS AT RATED BIAS

FIGURE 9. TYPICAL REPETITIVE SURGE CURRENT CAPABILITY OF C-III SERIES MOVs

FIGURE 10. TYPICAL REPETITIVE SURGE CURRENT CAPABILITY OF C-III SERIES MOVs