



PS2, US2 Series

PS2 type: Useful of 4,000 hours at 85°C, US2 type: Useful of 4,000 hours at 105°C
 (PS2 type: Warranty of 2,000 hours at 85°C, US2 type: Warranty of 2,000 hours at 105°C)

• Conform RoHS

Features

• The PS2 and US2 series are developed for the primary-side filter of the inverter or servo amplifier control circuit, and suitable for improvement of cost performance, being intended for a large-capacitance and higher ripple current.

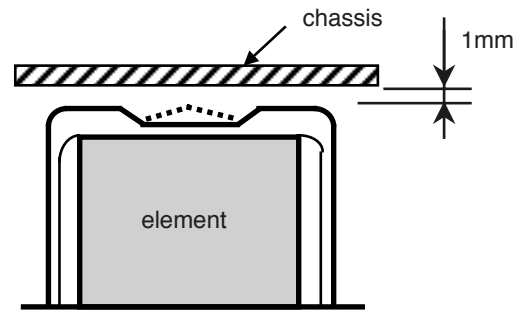


1) Higher ripple

1. Higher ripple through improvement of heat radiation performance by new heat radiation construction.
2. Higher ripple through use of low-ESR material. Consequently, the permissible ripple current is improved by 27% in the windless status or 40% in the ventilated condition (0.5 m/s) as compared with conventional constructions (HP3, HU3 series).

2) Better installation method

1. The blank (reinforcement) terminal is insulated through improvement of cap construction.
2. Improvement in air exhaust (flow hole phenomenon) from the terminal insertion hole at solder fixing though improvement of cap construction.
3. The operating space of the safety vent (arranged on the case bottom) is reduced from 5 mm (conventional necessary distance) into 1 mm through improvement of case construction. For these new case construction, pattern design can be move flexible.

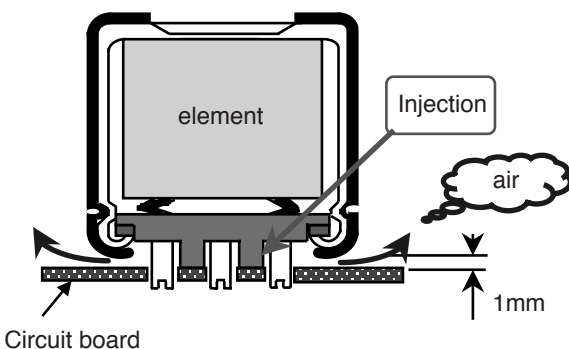

SNAP MOUNT TYPE ALUMINUM ELECTROLYTIC CAPACITORS

Product Specifications

Items	Specifications
Temperature range	PS2 : -40°C ~ +85°C US2 : -40°C ~ +105°C
Rated voltage	200 ~ 450V.DC
Capacitance tolerance	±20% (20°C, 120Hz)
Leakage current	0.01CV (μ A) or 5mA, whichever is smaller or less [C = nominal capacitance (μ F), V = rated voltage (V)]
Dissipation factor	Less than the value specified in the standard products table. (20°C, 120Hz)
Permissible ripple current	As specified in the standard products table. PS2 : (85°C, 120Hz) US2 : (105°C, 120Hz)
High-temperature load	After the rated voltage with specified ripple current is applied at the maximum operating temperature for 2000 hours, the following values are satisfied. Capacitance tolerance: ±15% or less of the initial value Dissipation factor: 175% or less of the specified initial value Leakage current: Specified initial value or less
Others	JIS C 5101-4.

Product code : (Example) PS2 type 450V 1,200 μ F±20%

PS2	2W	122	M	T	C	PF	
							Lead-Free (standard)
							Case dia code
							Terminal code
							Capacitance tolerance code
							Capacitance code
							Rated voltage code
							Type of series

Ripple current correction coefficient

1). Temperature correction coefficient

Temperature (°C)	PS2 (85°C)	US2 (105°C)
40	1.89	2.50
60	1.51	2.00
85	1.00	1.63
105	—	1.00

2). Frequency correction coefficient

Frequency (Hz)	PS2, US2
50/60	0.70
120	1.00
300	1.10
1K	1.30
10K \leq	1.40

3). Wind speed correction coefficient

Wind speed (m / s)	PS2, US2
0.5>	1.00
0.5 \leq	1.10

Case dia code

ϕ D	Code
41	B
46	H
51	C


Standard Products Table (PS2, 85°C/2000h)

Rated Voltage Code (Surge Voltage) (V. DC)	Capacitance (μ F)	Case size ϕ DXL(mm)	$\tan\delta$ 20°C, 120Hz	Ripple current (Arms) 85°C, 120Hz	ESR(typ.) 20°C, 100Hz (m Ω)	Product name
200 2D (250)	1800	41×45	0.15	5.78	63	PS22D182MSBPF
	2200	41×55	0.15	6.35	52	PS22D222MSBPF
	2700	46×51	0.15	6.58	42	PS22D272MSHPF
	3300	41×64	0.15	7.46	34	PS22D332MSBPF
		46×61	0.15	7.35	34	PS22D332MSHPF
		51×61	0.15	7.07	35	PS22D332MTCPF
	3900	46×70	0.15	7.98	30	PS22D392MSHPF
		51×61	0.15	7.76	30	PS22D392MTCPF
		4700	51×70	0.15	8.49	25
	250 2E (300)	1200	41×45	0.15	4.72	95
1800		41×55	0.15	5.75	63	PS22E182MSBPF
		46×51	0.15	5.37	63	PS22E182MSHPF
2200		41×64	0.15	6.41	52	PS22E222MSBPF
		46×61	0.15	6.00	52	PS22E222MSHPF
2700		51×51	0.15	6.40	43	PS22E272MTCPF
3300		46×70	0.15	7.34	34	PS22E332MSHPF
		51×61	0.15	7.14	34	PS22E332MTCPF
3900	51×70	0.15	7.73	30	PS22E392MTCPF	
400 2G (450)	560	41×45	0.15	4.22	132	PS22G561MSBPF
	680	41×55	0.15	4.62	109	PS22G681MSBPF
	820	46×51	0.15	5.13	90	PS22G821MSHPF
	1000	41×64	0.15	5.66	80	PS22G102MSBPF
		46×61	0.15	5.73	80	PS22G102MSHPF
		51×51	0.15	5.88	80	PS22G102MTCPF
	1200	46×70	0.15	6.26	66	PS22G122MSHPF
		51×61	0.15	6.51	66	PS22G122MTCPF
	1500	51×70	0.15	7.25	53	PS22G152MTCPF

Rated Voltage Code (Surge Voltage) (V. DC)	Capacitance (μ F)	Case size ϕ DXL(mm)	$\tan\delta$ 20°C, 120Hz	Ripple current (Arms) 85°C, 120Hz	ESR(typ.) 20°C, 100Hz (m Ω)	Product name
420 420V (470)	470	41×45	0.15	3.71	158	PS2420V471MSBPF
		41×55	0.15	4.44	109	PS2420V681MSBPF
	680	46×51	0.15	4.48	109	PS2420V681MSHPF
		41×64	0.15	4.92	90	PS2420V821MSBPF
		51×51	0.15	5.11	90	PS2420V821MTCPF
	1000	46×61	0.15	5.49	80	PS2420V102MSHPF
		46×70	0.15	6.01	66	PS2420V122MSHPF
	1200	51×61	0.15	6.25	66	PS2420V122MTCPF
		51×70	0.15	6.96	53	PS2420V152MTCPF
	450 2W (500)	390	41×45	0.15	3.38	190
41×55			0.15	4.03	132	PS22W561MSBPF
680		46×51	0.15	4.48	109	PS22W681MSHPF
		41×64	0.15	4.92	90	PS22W821MSBPF
820		46×61	0.15	4.98	90	PS22W821MSHPF
		51×51	0.15	5.11	90	PS22W821MTCPF
		46×70	0.15	5.48	80	PS22W102MSHPF
1000		51×61	0.15	5.70	80	PS22W102MTCPF
		51×70	0.15	6.22	66	PS22W122MTCPF

Life time graph



Useful life depending on ambient temperature T_a and ripple current operating conditions I_r versus rated ripple current at 85°C , 120Hz

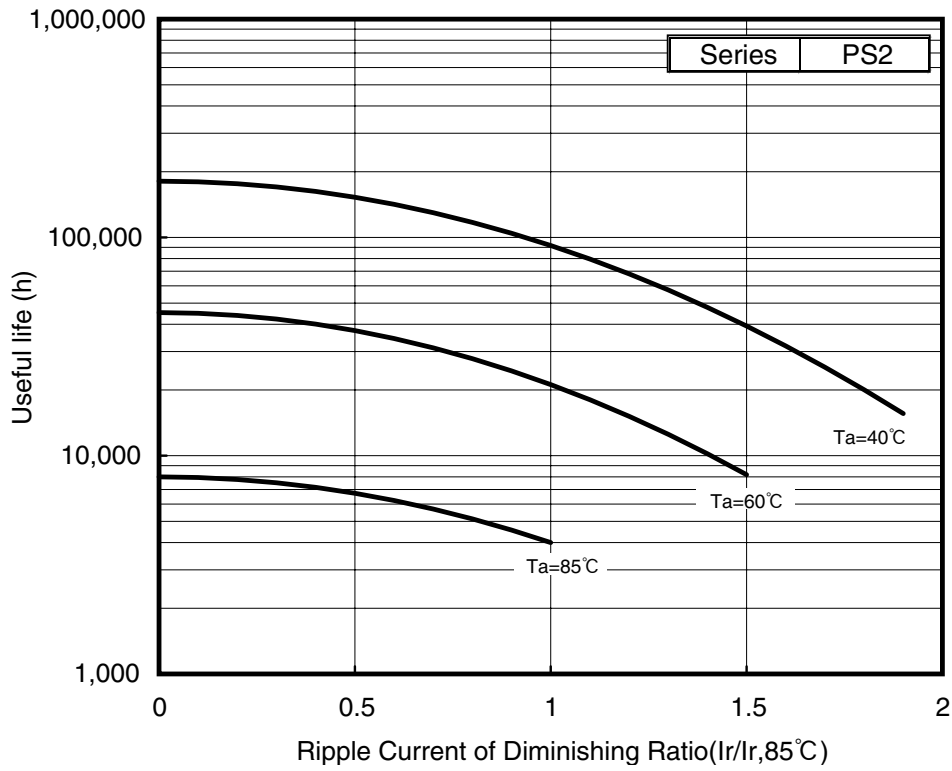

ALUMINUM ELECTROLYTIC CAPACITORS

SNAP MOUNT TYPE ALUMINUM ELECTROLYTIC CAPACITORS

Outline of drawings and dimensions

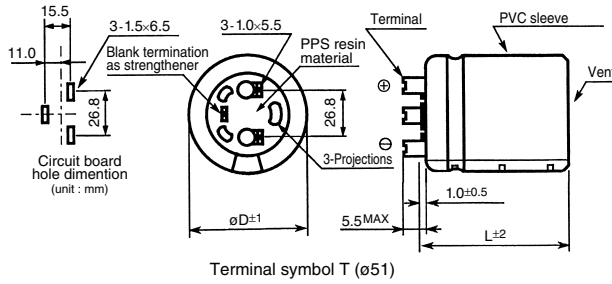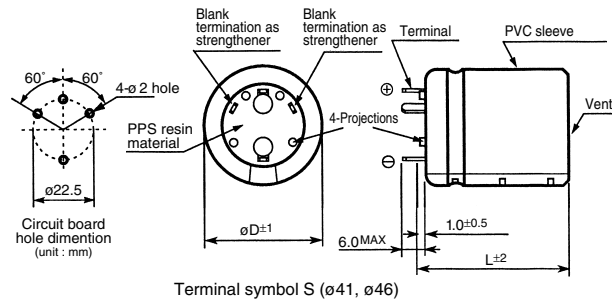

Standard Products Table (US2, 105°C/2000h)

Rated Voltage Code (Surge Voltage) (V. DC)	Capacitance (μF)	Case size ϕDXL (mm)	$\tan\delta$ 20°C, 120Hz	Ripple current (Arms) 105°C, 120Hz	ESR(typ.) 20°C, 100Hz (m Ω)	Product name
200 2D (250)	1500	41×45	0.15	3.99	76	US22D152MSBPF
		41×55	0.15	4.80	52	US22D222MSBPF
	2200	46×51	0.15	4.49	52	US22D222MSHPF
		41×64	0.15	5.37	42	US22D272MSBPF
	2700	51×51	0.15	4.84	42	US22D272MTCPPF
		46×61	0.15	5.56	34	US22D332MSHPF
	3300	46×70	0.15	6.03	30	US22D392MSHPF
		51×61	0.15	5.87	30	US22D392MTCPPF
3900	51×70	0.15	6.42	25	US22D472MTCPPF	
	4700	41×45	0.15	3.26	115	US22E102MSBPF
1000		41×55	0.15	3.96	76	US22E152MSBPF
	1500	41×64	0.15	4.38	63	US22E182MSBPF
1800		46×51	0.15	4.06	63	US22E182MSHPF
	2200	51×51	0.15	3.95	63	US22E182MTCPPF
2700		46×61	0.15	4.54	52	US22E222MSHPF
	3300	46×70	0.15	5.02	43	US22E272MSHPF
3900		51×61	0.15	4.88	43	US22E272MTCPPF
	4700	51×70	0.15	5.38	38	US22E332MTCPPF
400 2G (450)		470	41×45	0.15	2.92	158
	41×55		0.15	3.50	109	US22G681MSBPF
	680	46×51	0.15	3.53	109	US22G681MSHPF
		41×64	0.15	3.87	90	US22G821MSBPF
	820	51×51	0.15	4.03	90	US22G821MTCPPF
		46×61	0.15	4.33	80	US22G102MSHPF
	1000	46×70	0.15	4.73	66	US22G122MSHPF
		51×61	0.15	4.92	66	US22G122MTCPPF
1500	51×70	0.15	5.48	53	US22G152MTCPPF	

Rated Voltage Code (Surge Voltage) (V. DC)	Capacitance (μF)	Case size ϕDXL (mm)	$\tan\delta$ 20°C, 120Hz	Ripple current (Arms) 105°C, 120Hz	ESR(typ.) 20°C, 100Hz (m Ω)	Product name
420 420V (470)	390	41×45	0.15	2.56	190	US2420V391MSBPF
		560	41×55	0.15	3.04	132
	680	46×51	0.15	3.39	109	US2420V681MSHPF
		41×64	0.15	3.72	90	US2420V821MSBPF
	820	46×61	0.15	3.76	90	US2420V821MSHPF
		51×51	0.15	3.87	90	US2420V821MTCPPF
	1000	46×70	0.15	4.15	80	US2420V102MSHPF
		51×61	0.15	4.31	80	US2420V102MTCPPF
1200	51×70	0.15	4.71	66	US2420V122MTCPPF	
450 2W (500)	330	41×45	0.15	2.35	225	US22W331MSBPF
		470	41×55	0.15	2.79	158
	560	41×64	0.15	3.07	132	US22W561MSBPF
		46×51	0.15	3.07	132	US22W561MSHPF
	680	46×61	0.15	3.43	109	US22W681MSHPF
		51×51	0.15	3.52	109	US22W681MTCPPF
	820	46×70	0.15	3.75	90	US22W821MSHPF
		51×61	0.15	3.90	90	US22W821MTCPPF
1000	51×70	0.15	4.30	80	US22W102MTCPPF	

Life time graph

Useful life depending on ambient temperature T_a and ripple current operating conditions I_r versus rated ripple current at 105°C , 120Hz

