


**1N5807**  
**1N5809**  
**1N5811**  
**JANHCE and JANKCE**  
**JANHCF and JANKCF**

**FEATURES:**

- Chip Outline Dimensions: 68 x 68 mils
- Chip Thickness: 8 to 12 mils
- Anode Metallization: Aluminum
- Metallization Thickness: 70,000Å Nominal
- Bonding Area: 42 x 42 mils Min.
- Back Metallization: Gold-3000Å Nominal
- Junction Passivated with Thermal Silicon Dioxide - Planar Design
- Backside Available with Solderable Ag Backside as JANHCF or JANKCF

**6 AMPS**  
**FAST RECOVERY**  
**RECTIFIER CHIP**  
**50 - 150 VOLTS**

TYPE	V <sub>R</sub>	V <sub>BR</sub>	I <sub>O</sub> T <sub>j</sub> = 75°C
JANHCE1N5807	50V	60V	6.0A
JANHCE1N5809	100V	110V	6.0A
JANHCE1N58011	150V	160V	6.0A
JANKCE1N5807	50V	60V	6.0A
JANKCE1N5809	100V	110V	6.0A
JANKCE1N58011	150V	160V	6.0A

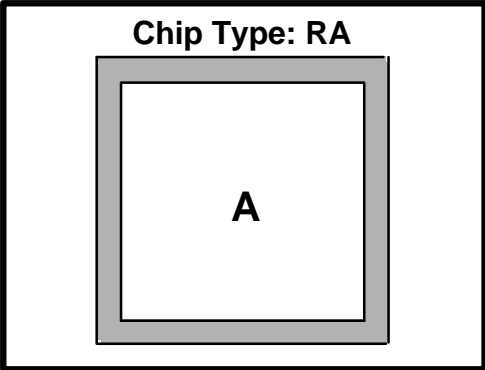

**ELECTRICAL CHARACTERISTICS:**

CHARACTERISTIC	SYMBOL	TYPICAL	MAX.	UNITS
Reverse Current Rated V <sub>R</sub> , T <sub>C</sub> = 25°C	I <sub>R</sub>	.01	5	μA
Reverse Current Rated V <sub>R</sub> , T <sub>C</sub> = 100°C	I <sub>R</sub>	1.0	150	μA
Forward Voltage Drop I <sub>F</sub> = 4A, T <sub>C</sub> = 25°C	V <sub>F</sub>	.84	.875	Volts
Junction Capacitance @ V <sub>R</sub> = 10V	C <sub>j</sub>	45	60	Pf

**REVERSE RECOVERY CHARACTERISTICS:**

CHARACTERISTIC	SYMBOL	TYPICAL	MAX.	UNITS
Reverse Recovery Time I <sub>F</sub> = 1A, I <sub>R</sub> = 1A, I <sub>RR</sub> = 0.1A	T <sub>rr</sub>	2.5	30	ns
Forward Recovery Voltage @ 1A Tr = 8ns	V <sub>rr</sub>	1.5	2.2	V
Forward Recovery Time I <sub>FM</sub> = 500 mA			15	ns

**1N5807**  
**1N5809**  
**1N5811**  
**JANHCE and JANKCE**  
**JANHCF and JANKCF**

## GROUP A ELECTRICALS


DRAWING NUMBER: MIL-S-19500/477 NUMBER: JANHCE1N5807/5809/5811 D00G1N5807/5809/5811KC

TEST #	SYMBOL	TEST CONDITIONS	MINIMUM	MAXIMUM	UNIT	
1		SUBGROUP A2				
2						
3	V <sub>FM1</sub>	I <sub>FM</sub> = 4.0 A		.875	V	
4	V <sub>FM2</sub>	I <sub>FM</sub> = 6.0 A		.925	V	
5	I <sub>R1</sub>	V <sub>R</sub> = 50 V (5807) V <sub>R</sub> = 100 V (5809) V <sub>R</sub> = 150 V (5811)		5.0	μA	
6	V <sub>(BR)1</sub>	I <sub>(BR)</sub> = 100 μA	1N5807 1N5809 1N5811	60 110 160	V V V	
7						
8		SUBGROUP A3				
9	I <sub>R2</sub>	V <sub>R</sub> = 50 V (5807) V <sub>R</sub> = 100 V (5809) V <sub>R</sub> = 150 V (5811)	T <sub>A</sub> = + 100°C	150	μA	
10	V <sub>FM3</sub>	I <sub>FM</sub> = 4.0 A	T <sub>A</sub> = + 100°C	0.800	V	
11	V <sub>FM4</sub>	I <sub>FM</sub> = 4.0 A	T <sub>A</sub> = - 65°C	1.075	V	
12	V <sub>(BR)2</sub>	I <sub>(BR)</sub> = 100 μA	T <sub>A</sub> = - 65°C	1N5807 1N5809 1N5811	50 100 150	V V V
13						
14		SUBGROUP 4				
15	t <sub>rr</sub>	I <sub>F</sub> = I <sub>R</sub> = 1.0 A I <sub>RM(REC)</sub> = 0.1 A	di/dt = 100 A/us (min)	30	nS	
16	C <sub>J</sub>	V <sub>R</sub> = 10 V, f = 1 Mhz	V <sub>sig</sub> = 50 mV (P-P) (MAX)	60	pF	
17	V <sub>FRM</sub>	t <sub>r</sub> = 8 nS I <sub>FM</sub> = 500 mA		2.2	V	
18	t <sub>fr</sub>	t <sub>p</sub> ≥ 20 nS t <sub>r</sub> 8 nS	V <sub>FR</sub> = 1.1 x V <sub>F</sub> I <sub>FM</sub> = 500 mA(pk)	15	nS	

1N5807  
 1N5809  
 1N5811  
 JANHCE and JANKCE  
 JANHCF and JANKCF

**DIE DIMENSIONS:**

MIL-PRF-19500/477C

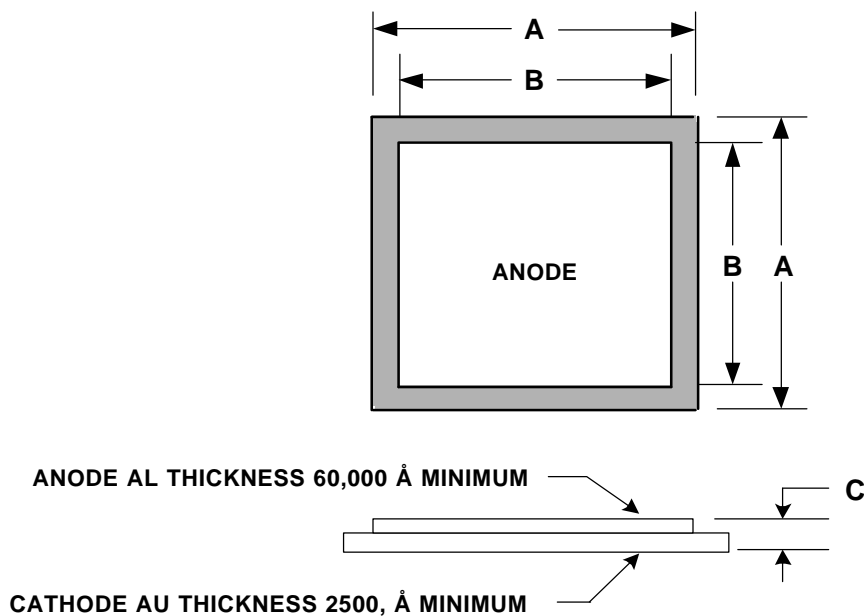

1N5807, 1N5809, 1N5811

Ltr	Dimensions			
	Inches		Millimeters	
	Min	Max	Min	Max
A	.066	.070	1.68	1.78
B	.057	.061	1.45	1.55
C	.008	.012	0.20	0.30

**Notes:**

1. Dimensions are in inches.
2. Metric equivalents are given for general information only.

Figure 7. JANC (E-version) die dimensions.