

**SPECIFICATION**

VOLTAGE: 12.0V

CURRENT: 0.50A

MSCP: 8.50

COLOR TEMP.: 3,000

LIFE: 70 Hours




LCL: .27 +/- 0.008" (Bottom of capsule to center of filament.)

FILAMENT TYPE: CC-6

Xenon Filled

REVISIONS

REV	DESCRIPTION	DATE	BY
A	Moved LCL from 0.26 to 0.27	9/30/04	NP
B	Revised LCL tolerance from 0.25mm to 0.20mm	03/01/05	DW

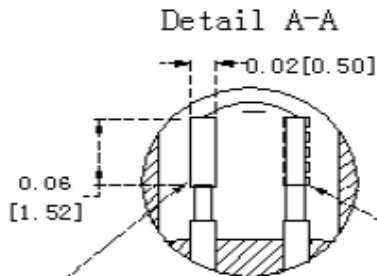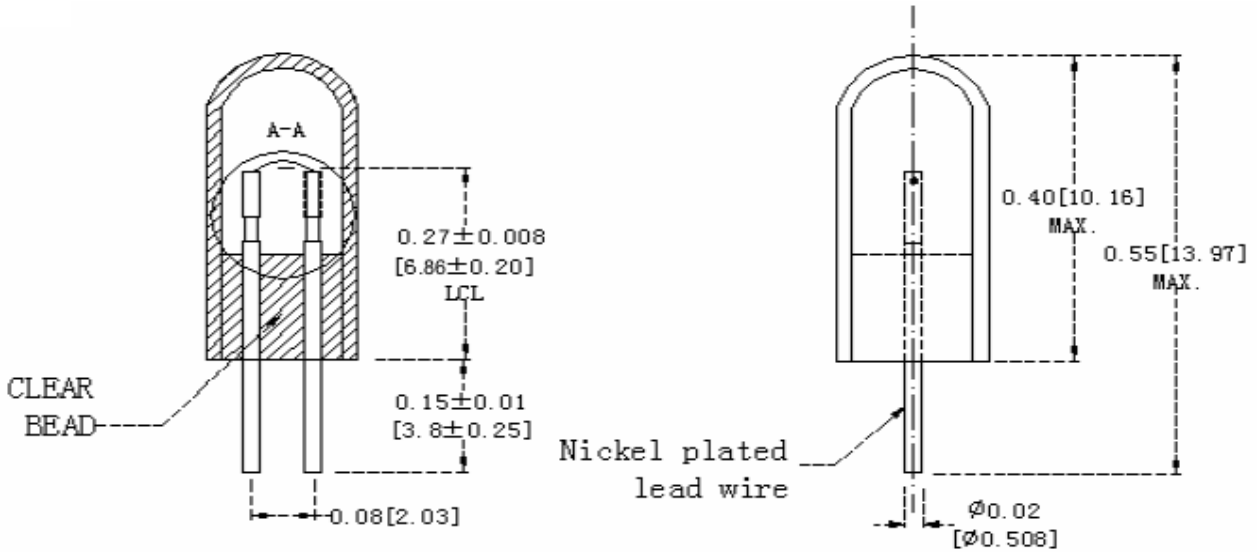

Zirconium strip, .001" or .002" thick, welded in several places.

Strip welded to opposite side, should be on same side as filament leg to ensure the zirconium is hot.

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES AND TOLERANCES ARE:  
 FRACTIONS: ± 1/64  
 X.X ± 0.1  
 DECIMALS: X.XX ± 0.01  
 X.XXX ± 0.005  
 ANGLES ± 1°  
 \*INDICATES 100% Q.A. CHECK

GILWAY TECHNICAL LAMP  
 55 Commerce Way, Woburn, MA 01801

L1060 T1½ 12V Xenon

SIZE A	FSCM NO.	DWG NO. 155-1627	REV B
SCALE		SHEET 1 of 1	