


COMBICON Plugs, Pitch 5.0 or 5.08 mm

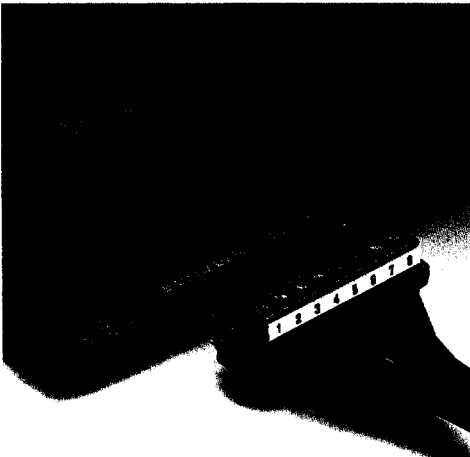

MSTB plugs with plug-in direction parallel to the conductor axis are available with a 5.0 mm or 5.08 mm pitch and 2 to 24 positions.

MSTB plugs with strain relief are available with a 5.0 mm pitch and 8 to 16 positions and with a 5.08 mm inch pitch and 3 to 16 positions.

MSTBP plugs with test connection for 2 or 2.3 mm Ø test plugs are available with 2 to 24 positions, and a 5.0 mm metric or a 5.08 mm inch pitch.

The plugs are available with and without a screw flange (STF), to permit a vibration-resistant connection with the headers.

The self-adhesive marker cards SK 5/3,8 or SK 5,08/3,8 are used for labeling (order data, see page 210).

The combination possibilities for plug connectors are documented in the COMBICON cross-reference list on pages 82 to 85.

Articles printed in bold can be delivered at short notice.
Products with black or gray housing available on request.



MSTB 2,5/...-ST

Plug-in direction parallel to the conductor axis

Pitch 5.0 or 5.08

(IEC) [mm ²]	rigid solid	flexible stranded	AWG	I [A]	U [V]
Connection data	0.2-2.5	0.2-2.5	24-12	12	250

Further technical data see page 220.

Note:

Only actuate COMBICON plug connectors when under no load condition. If for operating reasons small loads must be switched, experimental values are available upon request.





Description	No. of positions	Dim. a [mm]	Type	Order No.	Pcs. Pkt.
Plugs, 5.0 mm pitch, color: green	2	5	MSTB 2,5/2-ST	17 54 44 9	50
	3	10	MSTB 2,5/3-ST	17 54 46 5	
	4	15	MSTB 2,5/4-ST	17 54 48 1	
	5	20	MSTB 2,5/5-ST	17 54 50 4	
	6	25	MSTB 2,5/6-ST	17 54 52 0	
	7	30	MSTB 2,5/7-ST	17 54 54 6	
	8	35	MSTB 2,5/8-ST	17 54 56 2	
	9	40	MSTB 2,5/9-ST	17 54 58 8	
	10	45	MSTB 2,5/10-ST	17 54 60 1	
	11	50	MSTB 2,5/11-ST	17 54 62 7	
	12	55	MSTB 2,5/12-ST	17 54 64 3	
	13	60	MSTB 2,5/13-ST	17 54 66 9	
	14	65	MSTB 2,5/14-ST	17 54 68 5	
	15	70	MSTB 2,5/15-ST	17 54 70 8	
	16	75	MSTB 2,5/16-ST	17 54 72 4	
	17	80	MSTB 2,5/17-ST	17 54 74 0	
	18	85	MSTB 2,5/18-ST	17 54 76 6	
	19	90	MSTB 2,5/19-ST	17 54 78 2	
	20	95	MSTB 2,5/20-ST	17 54 80 5	
	21	100	MSTB 2,5/21-ST	17 54 82 1	
	22	105	MSTB 2,5/22-ST	17 54 84 7	
	23	110	MSTB 2,5/23-ST	17 54 86 3	
	24	115	MSTB 2,5/24-ST	17 54 88 9	
	Plugs, 5.08 mm pitch, color: green	2	5.08	MSTB 2,5/2-ST-5,08	
3		10.16	MSTB 2,5/3-ST-5,08	17 57 02 2	
4		15.24	MSTB 2,5/4-ST-5,08	17 57 03 5	
5		20.36	MSTB 2,5/5-ST-5,08	17 57 04 8	
6		25.40	MSTB 2,5/6-ST-5,08	17 57 05 1	
7		30.48	MSTB 2,5/7-ST-5,08	17 57 06 4	
8		35.56	MSTB 2,5/8-ST-5,08	17 57 07 7	
9		40.64	MSTB 2,5/9-ST-5,08	17 57 08 0	
10		45.72	MSTB 2,5/10-ST-5,08	17 57 09 3	
11		50.80	MSTB 2,5/11-ST-5,08	17 57 10 3	
12		55.88	MSTB 2,5/12-ST-5,08	17 57 11 6	
13		60.96	MSTB 2,5/13-ST-5,08	17 57 12 9	
14		66.04	MSTB 2,5/14-ST-5,08	17 57 13 2	
15		71.12	MSTB 2,5/15-ST-5,08	17 57 14 5	
16		76.20	MSTB 2,5/16-ST-5,08	17 57 15 8	
17		81.28	MSTB 2,5/17-ST-5,08	17 57 16 1	
18		86.36	MSTB 2,5/18-ST-5,08	17 57 17 4	
19		91.44	MSTB 2,5/19-ST-5,08	17 57 18 7	
20		96.52	MSTB 2,5/20-ST-5,08	17 57 19 0	
21		101.60	MSTB 2,5/21-ST-5,08	17 57 20 0	
22		106.68	MSTB 2,5/22-ST-5,08	17 57 21 3	
23		111.76	MSTB 2,5/23-ST-5,08	17 57 22 6	
24		116.84	MSTB 2,5/24-ST-5,08	17 57 23 9	

- (1) Test plug, consisting of metal part and colored insulating sleeve;
- (2) Reducing plug, see page 207



Screwdriver SZS 0,6 x 3,5 see page 120.



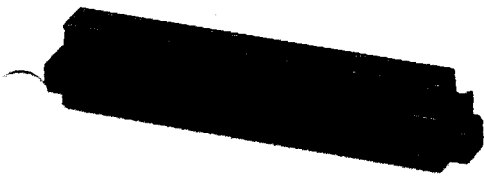


MSTB 2,5/...-STF

with screw flange.
plug-in direction parallel to the conductor axis

Pitch 5.0 or 5.08

(IEC) [mm ²]	rigid solid	flexible stranded	AWG	I [A]	U [V]
Connection data	0.2-2.5	0.2-2.5	24-12	12	250

Further technical data see page 220.

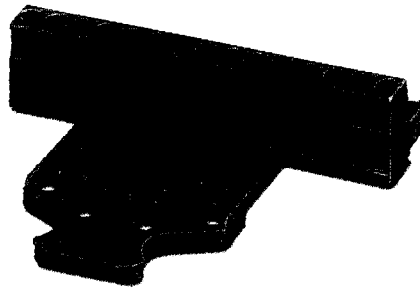

MSTB 2,5/...-STZ

Plug with strain relief

Pitch 5.0 or 5.08

(IEC) [mm ²]	rigid solid	flexible stranded	AWG	I [A]	U [V]
Connection data	0.2-2.5	0.2-2.5	24-12	12	250

Further technical data see page 220.



MSTBP 2,5/...-ST

Plug with test connection

Pitch 5.0 or 5.08

(IEC) [mm ²]	rigid solid	flexible stranded	AWG	I [A]	U [V]
Connection data	0.2-2.5	0.2-2.5	24-12	12	250

Further technical data see page 220.



Type	Order No.	Pcs. Pkt.
MSTB 2,5/2-STF	17 86 83 1	50
MSTB 2,5/3-STF	17 86 84 4	
MSTB 2,5/4-STF	17 86 85 7	
MSTB 2,5/5-STF	17 86 86 0	
MSTB 2,5/6-STF	17 86 87 3	
MSTB 2,5/7-STF	17 86 88 6	
MSTB 2,5/8-STF	17 86 89 9	
MSTB 2,5/9-STF	17 86 90 9	
MSTB 2,5/10-STF	17 86 91 2	
MSTB 2,5/11-STF	17 86 92 5	
MSTB 2,5/12-STF	17 86 93 8	
MSTB 2,5/13-STF	17 86 94 1	
MSTB 2,5/14-STF	17 86 95 4	
MSTB 2,5/15-STF	17 86 96 7	
MSTB 2,5/16-STF	17 86 97 0	
MSTB 2,5/17-STF	17 86 98 3	
MSTB 2,5/18-STF	17 86 99 6	
MSTB 2,5/19-STF	17 87 00 5	
MSTB 2,5/20-STF	17 87 01 8	

MSTB 2,5/2-STF-5,08	17 77 98 9	50
MSTB 2,5/3-STF-5,08	17 77 99 2	
MSTB 2,5/4-STF-5,08	17 78 00 1	
MSTB 2,5/5-STF-5,08	17 78 01 4	
MSTB 2,5/6-STF-5,08	17 78 02 7	
MSTB 2,5/7-STF-5,08	17 78 03 0	
MSTB 2,5/8-STF-5,08	17 78 04 3	
MSTB 2,5/9-STF-5,08	17 78 05 6	
MSTB 2,5/10-STF-5,08	17 78 06 9	
MSTB 2,5/11-STF-5,08	17 78 07 2	
MSTB 2,5/12-STF-5,08	17 78 08 5	
MSTB 2,5/13-STF-5,08	17 78 09 8	
MSTB 2,5/14-STF-5,08	17 78 10 8	
MSTB 2,5/15-STF-5,08	17 78 11 1	
MSTB 2,5/16-STF-5,08	17 78 12 4	
MSTB 2,5/17-STF-5,08	17 78 13 7	
MSTB 2,5/18-STF-5,08	17 78 14 0	
MSTB 2,5/19-STF-5,08	17 78 15 3	
MSTB 2,5/20-STF-5,08	17 78 16 6	



Type	Order No.	Pcs. Pkt.
MSTB 2,5/8-STZ	17 58 98 2	50
MSTB 2,5/9-STZ	17 58 99 5	
MSTB 2,5/10-STZ	17 59 00 4	
MSTB 2,5/11-STZ	17 59 34 7	
MSTB 2,5/12-STZ	17 59 35 0	
MSTB 2,5/13-STZ	17 59 36 3	
MSTB 2,5/14-STZ	17 59 37 6	
MSTB 2,5/15-STZ	17 59 38 9	
MSTB 2,5/16-STZ	17 59 39 2	

MSTB 2,5/3-STZ-5,08	17 76 16 8	50
MSTB 2,5/4-STZ-5,08	17 76 15 5	
MSTB 2,5/5-STZ-5,08	17 76 14 2	
MSTB 2,5/6-STZ-5,08	17 76 12 6	
MSTB 2,5/7-STZ-5,08	17 76 11 3	
MSTB 2,5/8-STZ-5,08	17 64 23 5	
MSTB 2,5/9-STZ-5,08	17 64 31 6	
MSTB 2,5/10-STZ-5,08	17 64 30 3	
MSTB 2,5/11-STZ-5,08	17 64 29 3	
MSTB 2,5/12-STZ-5,08	17 64 28 0	
MSTB 2,5/13-STZ-5,08	17 64 27 7	
MSTB 2,5/14-STZ-5,08	17 64 26 4	
MSTB 2,5/15-STZ-5,08	17 64 25 1	
MSTB 2,5/16-STZ-5,08	17 64 24 8	






Type	Order No.	Pcs. Pkt.
MSTBP 2,5/2-ST	17 65 77 1	50
MSTBP 2,5/3-ST	17 65 78 4	
MSTBP 2,5/4-ST	17 65 79 7	
MSTBP 2,5/5-ST	17 65 80 7	
MSTBP 2,5/6-ST	17 65 81 0	
MSTBP 2,5/7-ST	17 65 82 3	
MSTBP 2,5/8-ST	17 65 83 6	
MSTBP 2,5/9-ST	17 65 84 9	
MSTBP 2,5/10-ST	17 65 85 2	
MSTBP 2,5/11-ST	17 65 86 5	
MSTBP 2,5/12-ST	17 65 87 8	
MSTBP 2,5/13-ST	17 65 88 1	
MSTBP 2,5/14-ST	17 65 89 4	
MSTBP 2,5/15-ST	17 65 90 4	
MSTBP 2,5/16-ST	17 65 91 7	
MSTBP 2,5/17-ST	17 65 92 0	
MSTBP 2,5/18-ST	17 65 93 3	
MSTBP 2,5/19-ST	17 65 94 6	
MSTBP 2,5/20-ST	17 65 95 9	
MSTBP 2,5/21-ST	17 65 96 2	
MSTBP 2,5/22-ST	17 65 97 5	
MSTBP 2,5/23-ST	17 65 98 8	
MSTBP 2,5/24-ST	17 65 99 1	

MSTBP 2,5/2-ST-5,08	17 69 01 0	50
MSTBP 2,5/3-ST-5,08	17 69 02 3	
MSTBP 2,5/4-ST-5,08	17 69 03 6	
MSTBP 2,5/5-ST-5,08	17 69 04 9	
MSTBP 2,5/6-ST-5,08	17 69 05 2	
MSTBP 2,5/7-ST-5,08	17 69 06 5	
MSTBP 2,5/8-ST-5,08	17 69 07 8	
MSTBP 2,5/9-ST-5,08	17 69 08 1	
MSTBP 2,5/10-ST-5,08	17 69 09 4	
MSTBP 2,5/11-ST-5,08	17 69 10 7	
MSTBP 2,5/12-ST-5,08	17 69 11 7	
MSTBP 2,5/13-ST-5,08	17 69 12 0	
MSTBP 2,5/14-ST-5,08	17 69 13 3	
MSTBP 2,5/15-ST-5,08	17 69 14 6	
MSTBP 2,5/16-ST-5,08	17 69 15 9	
MSTBP 2,5/17-ST-5,08	17 69 16 2	
MSTBP 2,5/18-ST-5,08	17 69 17 5	
MSTBP 2,5/19-ST-5,08	17 69 18 8	
MSTBP 2,5/20-ST-5,08	17 69 19 1	
MSTBP 2,5/21-ST-5,08	17 69 20 1	
MSTBP 2,5/22-ST-5,08	17 69 21 4	
MSTBP 2,5/23-ST-5,08	17 69 22 7	
MSTBP 2,5/24-ST-5,08	17 69 69 6	


MPS... (see page 207)

RPS

02 01 64 7

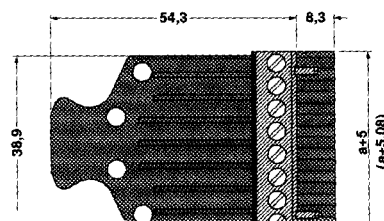

COMBICON Plugs, Pitch 5.0 or 5.08 mm

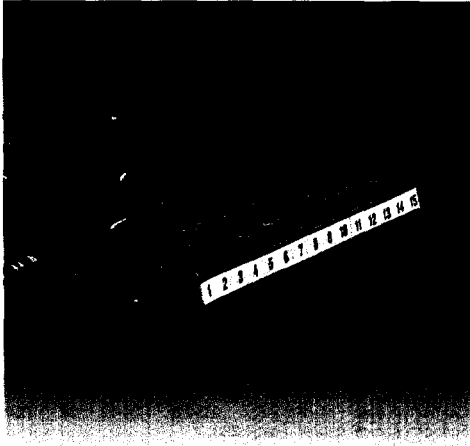

The combination possibilities for plug connectors are documented in the COMBICON cross-reference list on pages 82 to 85.

Articles printed in bold can be delivered at short notice.
Products with black or gray housing available on request.



MSTBT 2,5/...-ST

Plug-in direction parallel to the conductor axis

Pitch 5.0 or 5.08

(IEC) [mm ²]	rigid solid	flexible stranded	AWG	I [A]	U [V]
Connection data	0.2-2.5	0.2-2.5	24-12	12	250

Further technical data see page 220.

Note:

Only actuate COMBICON plug connectors when under no load condition. If for operating reasons small loads must be switched, experimental values are available upon request.


The T-shape of the MSTBT plug distributes the height uniformly over the upper and lower sides of the printed circuit board.


The distances to adjacent printed circuit boards can be reduced considerably thanks to the low overall height of the module.

The self-adhesive marker cards SK 5/3,8 or SK 5,08/3,8 are used for labelling (order data, see page 210).

Description	No. of positions	Dim. a [mm]	Type	Order No.	Pcs. Pkt.
Plugs, 5.0 mm pitch, color: green	2	5	MSTBT 2,5/2-ST	17 79 83 5	50
	3	10	MSTBT 2,5/3-ST	17 79 84 8	
	4	15	MSTBT 2,5/4-ST	17 79 85 1	
	5	20	MSTBT 2,5/5-ST	17 79 86 4	
	6	25	MSTBT 2,5/6-ST	17 79 87 7	
	7	30	MSTBT 2,5/7-ST	17 79 88 0	
	8	35	MSTBT 2,5/8-ST	17 79 89 3	
	9	40	MSTBT 2,5/9-ST	17 79 90 3	
	10	45	MSTBT 2,5/10-ST	17 79 91 6	
	11	50	MSTBT 2,5/11-ST	17 79 92 9	
	12	55	MSTBT 2,5/12-ST	17 79 93 2	
	13	60	MSTBT 2,5/13-ST	17 79 94 5	
	14	65	MSTBT 2,5/14-ST	17 79 95 8	
	15	70	MSTBT 2,5/15-ST	17 79 96 1	
	16	75	MSTBT 2,5/16-ST	17 79 97 4	
	17	80			
	18	85			
	19	90			
	20	95			
	21	100			
	22	105			
	23	110			
	24	115			
	Plugs, 5.08 mm pitch, color: green	2	5.08	MSTBT 2,5/2-ST-5,08	
3		10.16	MSTBT 2,5/3-ST-5,08	17 79 99 0	
4		15.24	MSTBT 2,5/4-ST-5,08	17 80 00 2	
5		20.32	MSTBT 2,5/5-ST-5,08	17 81 01 4	
6		25.40	MSTBT 2,5/6-ST-5,08	17 81 02 7	
7		30.48	MSTBT 2,5/7-ST-5,08	17 81 03 0	
8		35.56	MSTBT 2,5/8-ST-5,08	17 81 04 3	
9		40.64	MSTBT 2,5/9-ST-5,08	17 34 20 7	
10		45.72	MSTBT 2,5/10-ST-5,08	17 81 06 9	
11		50.80	MSTBT 2,5/11-ST-5,08	17 81 07 2	
12		55.88	MSTBT 2,5/12-ST-5,08	17 81 08 5	
13		60.96	MSTBT 2,5/13-ST-5,08	17 81 09 8	
14		66.04	MSTBT 2,5/14-ST-5,08	17 81 10 8	
15		71.12	MSTBT 2,5/15-ST-5,08	17 81 11 1	
16		76.20	MSTBT 2,5/16-ST-5,08	17 81 12 4	
17		81.28			
18		86.36			
19		91.44			
20		96.52			
21		101.60			
22		106.68			
23		111.76			
24		116.84			

Screwdriver SZS 0,6 x 3,5 see page 120.



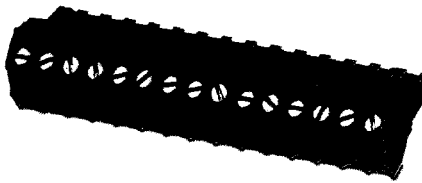

MSTBT 2,5/...-STF

with T-shape and screw flange

SMSTB 2,5/...-ST

Plug-in direction 45° to the conductor axis

Pitch 5.08

	(IEC) [mm ²]	rigid solid	flexible stranded	AWG	I [A]	U [V]
Connection data	0.2-2.5		0.2-2.5	24-12	12	250

Further technical data see page 220.

Pitch 5.0 or 5.08

	(IEC) [mm ²]	rigid solid	flexible stranded	AWG	I [A]	U [V]
Connection data	0.2-2.5		0.2-2.5	24-12	12	250

Further technical data see page 220.



Type

Order No.

Pcs.
Pkt.

MSTBT 2,5/2-STF-5,08	18 05 30 1	50
MSTBT 2,5/3-STF-5,08	18 05 31 4	
MSTBT 2,5/4-STF-5,08	18 05 32 7	
MSTBT 2,5/5-STF-5,08	18 05 33 0	
MSTBT 2,5/6-STF-5,08	18 05 34 3	
MSTBT 2,5/7-STF-5,08	18 05 35 6	
MSTBT 2,5/8-STF-5,08	18 04 66 1	
MSTBT 2,5/9-STF-5,08	18 05 36 9	
MSTBT 2,5/10-STF-5,08	18 05 37 2	
MSTBT 2,5/11-STF-5,08	18 05 38 5	
MSTBT 2,5/12-STF-5,08	18 05 39 8	
MSTBT 2,5/13-STF-5,08	18 05 40 8	
MSTBT 2,5/14-STF-5,08	18 05 41 1	
MSTBT 2,5/15-STF-5,08	18 05 42 4	
MSTBT 2,5/16-STF-5,08	18 05 43 7	





Type


Order No.

Pcs.
Pkt.

SMSTB 2,5/2-ST	17 68 76 5	50
SMSTB 2,5/3-ST	17 68 77 8	
SMSTB 2,5/4-ST	17 68 78 1	
SMSTB 2,5/5-ST	17 68 79 4	
SMSTB 2,5/6-ST	17 68 80 4	
SMSTB 2,5/7-ST	17 68 81 7	
SMSTB 2,5/8-ST	17 68 44 8	
SMSTB 2,5/9-ST	17 68 82 0	
SMSTB 2,5/10-ST	17 68 83 3	
SMSTB 2,5/11-ST	17 68 84 6	
SMSTB 2,5/12-ST	17 68 85 9	
SMSTB 2,5/13-ST	17 68 86 2	
SMSTB 2,5/14-ST	17 68 87 5	
SMSTB 2,5/15-ST	17 68 88 8	
SMSTB 2,5/16-ST	17 68 89 1	
SMSTB 2,5/17-ST	17 68 90 1	
SMSTB 2,5/18-ST	17 68 91 4	
SMSTB 2,5/19-ST	17 68 92 7	
SMSTB 2,5/20-ST	17 68 93 0	
SMSTB 2,5/21-ST	17 68 94 3	
SMSTB 2,5/22-ST	17 68 95 6	
SMSTB 2,5/23-ST	17 68 96 9	
SMSTB 2,5/24-ST	17 68 97 2	
SMSTB 2,5/2-ST-5,08	18 26 28 3	50
SMSTB 2,5/3-ST-5,08	18 26 29 6	
SMSTB 2,5/4-ST-5,08	18 26 30 6	
SMSTB 2,5/5-ST-5,08	18 26 31 9	
SMSTB 2,5/6-ST-5,08	18 26 32 2	
SMSTB 2,5/7-ST-5,08	18 26 33 5	
SMSTB 2,5/8-ST-5,08	18 26 34 8	
SMSTB 2,5/9-ST-5,08	18 26 35 1	
SMSTB 2,5/10-ST-5,08	18 26 36 4	
SMSTB 2,5/11-ST-5,08	18 26 37 7	
SMSTB 2,5/12-ST-5,08	18 26 38 0	
SMSTB 2,5/13-ST-5,08	18 26 39 3	
SMSTB 2,5/14-ST-5,08	18 26 40 3	
SMSTB 2,5/15-ST-5,08	18 26 41 6	
SMSTB 2,5/16-ST-5,08	18 26 42 9	
SMSTB 2,5/17-ST-5,08	18 50 56 3	
SMSTB 2,5/18-ST-5,08	18 50 57 6	
SMSTB 2,5/19-ST-5,08	18 50 58 9	
SMSTB 2,5/20-ST-5,08	18 50 59 2	
SMSTB 2,5/21-ST-5,08	18 50 60 2	
SMSTB 2,5/22-ST-5,08	18 50 61 5	
SMSTB 2,5/23-ST-5,08	18 50 62 8	
SMSTB 2,5/24-ST-5,08	18 50 63 1	



COMBICON Plugs, Pitch 5.0 or 5.08 mm

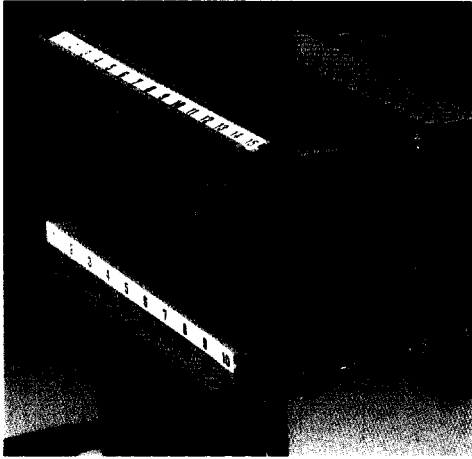

The standard COMBICON plugs have now been joined by variants for vertical plug-in direction:

1. MVSTBR 2,5...-ST(-5,08), conductor entry on the coded side of the plug.
2. MVSTBW 2,5...-ST(-5,08), conductor entry on the rippled side of the plug.

Vertical plugs can be placed immediately against neighboring walls and removed without squashing the connected lines.

Both plugs are also available with 2 to 24 positions and a 5.0 and 5.08 mm pitch.

Alternatively, the plugs are also available with screw flange and 2 to 20 positions for vibration-resistant connection to headers with threaded flange.

The plugs can be coded by inserting the coding elements CP-MSTB. The coding elements CR-MSTB are inserted into the recesses in the corresponding header. The self-adhesive marker cards SK 5/3,8 or SK 5,08/3,8 are used for labelling (see page 210).

The combination possibilities for plug connectors are documented in the COMBICON cross-reference list on pages 82 to 85.

Articles printed in bold can be delivered at short notice.
Products with black or gray housing available on request.



MVSTBR 2,5/...-ST

Plug-in direction vertical to the conductor axis, connection point facing the smooth wall (R) of the header

Pitch 5.0 or 5.08

(IEC) [mm ²]	rigid solid	flexible stranded	AWG	I [A]	U [V]
Connection data	0.2-2.5	0.2-2.5	24-12	12	250

Further technical data see page 221.

Note:


Only actuate COMBICON plug connectors when under no load condition. If for operating reasons small loads must be switched, experimental values are available on request.

Description	No. of positions	Dim. a [mm]
Plugs, 5.0 mm pitch, color: green	2	5
	3	10
	4	15
	5	20
	6	25
	7	30
	8	35
	9	40
	10	45
	11	50
	12	55
	13	60
14	65	
15	70	
16	75	
17	80	
18	85	
19	90	
20	95	
21	100	
22	105	
23	110	
24	115	
Plugs, 5.08 mm pitch, color: green	2	5.08
	3	10.16
	4	15.24
	5	20.32
	6	25.40
	7	30.48
	8	35.56
	9	40.64
	10	45.72
	11	50.80
	12	55.88
	13	60.96
14	66.04	
15	71.12	
16	76.20	
17	81.28	
18	86.36	
19	91.44	
20	96.52	
21	101.60	
22	106.68	
23	111.76	
24	116.84	



Type	Order No.	Pcs. Pkt.
MVSTBR 2,5/2-ST	17 92 01 6	50
MVSTBR 2,5/3-ST	17 92 02 9	
MVSTBR 2,5/4-ST	17 92 03 2	
MVSTBR 2,5/5-ST	17 92 04 5	
MVSTBR 2,5/6-ST	17 92 05 8	
MVSTBR 2,5/7-ST	17 92 06 1	
MVSTBR 2,5/8-ST	17 92 07 4	
MVSTBR 2,5/9-ST	17 92 08 7	
MVSTBR 2,5/10-ST	17 92 09 0	
MVSTBR 2,5/11-ST	17 92 10 3	
MVSTBR 2,5/12-ST	17 92 11 6	
MVSTBR 2,5/13-ST	17 92 12 9	
MVSTBR 2,5/14-ST	17 92 13 2	
MVSTBR 2,5/15-ST	17 92 14 5	
MVSTBR 2,5/16-ST	17 92 15 8	
MVSTBR 2,5/17-ST	17 92 16 1	
MVSTBR 2,5/18-ST	17 92 17 4	
MVSTBR 2,5/19-ST	17 92 18 7	
MVSTBR 2,5/20-ST	17 92 19 0	
MVSTBR 2,5/21-ST	17 92 20 3	
MVSTBR 2,5/22-ST	17 92 21 6	
MVSTBR 2,5/23-ST	17 92 22 9	
MVSTBR 2,5/24-ST	17 92 23 2	
MVSTBR 2,5/2-ST-5,08	17 92 24 9	50
MVSTBR 2,5/3-ST-5,08	17 92 25 2	
MVSTBR 2,5/4-ST-5,08	17 92 26 5	
MVSTBR 2,5/5-ST-5,08	17 92 27 8	
MVSTBR 2,5/6-ST-5,08	17 92 28 1	
MVSTBR 2,5/7-ST-5,08	17 92 29 4	
MVSTBR 2,5/8-ST-5,08	17 92 30 7	
MVSTBR 2,5/9-ST-5,08	17 92 31 0	
MVSTBR 2,5/10-ST-5,08	17 92 32 3	
MVSTBR 2,5/11-ST-5,08	17 92 33 6	
MVSTBR 2,5/12-ST-5,08	17 92 34 9	
MVSTBR 2,5/13-ST-5,08	17 92 35 2	
MVSTBR 2,5/14-ST-5,08	17 92 36 5	
MVSTBR 2,5/15-ST-5,08	17 92 37 8	
MVSTBR 2,5/16-ST-5,08	17 92 38 1	
MVSTBR 2,5/17-ST-5,08	17 92 39 4	
MVSTBR 2,5/18-ST-5,08	17 92 40 7	
MVSTBR 2,5/19-ST-5,08	17 92 41 0	
MVSTBR 2,5/20-ST-5,08	17 92 42 3	
MVSTBR 2,5/21-ST-5,08	17 92 43 6	
MVSTBR 2,5/22-ST-5,08	17 92 44 9	
MVSTBR 2,5/23-ST-5,08	17 92 45 2	
MVSTBR 2,5/24-ST-5,08	17 92 46 5	

Screwdriver SZS 0.6 x 3,5 see page 120.





MVSTBR 2,5/...-STF

with screw flange,
connection point facing the **smooth** wall (R)
of the header

Pitch 5.0 or 5.08

(IEC) [mm ²]	rigid solid	flexible stranded	AWG	I [A]	U [V]
Connection data	0.2-2.5	0.2-2.5	24-12	12	250

Further technical data see page 221.




MVSTBW 2,5/...-ST

Plug-in direction vertical to the conductor axis,
connection point facing the **rippled** wall (W)
of the header

Pitch 5.0 or 5.08

(IEC) [mm ²]	rigid solid	flexible stranded	AWG	I [A]	U [V]
Connection data	0.2-2.5	0.2-2.5	24-12	12	250

Further technical data see page 221.

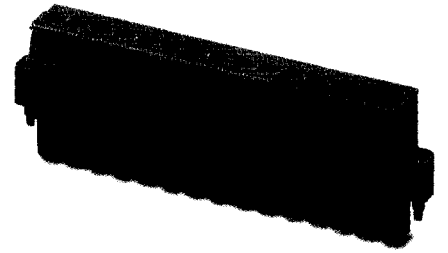

MVSTBW 2,5/...-STF

with screw flange,
connection point facing the **rippled** wall (W)
of the header

Pitch 5.0 or 5.08

(IEC) [mm ²]	rigid solid	flexible stranded	AWG	I [A]	U [V]
Connection data	0.2-2.5	0.2-2.5	24-12	12	250

Further technical data see page 221.



Type	Order No.
MVSTBR 2,5/2-STF	18 35 47 8
MVSTBR 2,5/3-STF	18 35 48 1
MVSTBR 2,5/4-STF	18 35 49 4
MVSTBR 2,5/5-STF	18 35 50 4
MVSTBR 2,5/6-STF	18 35 51 7
MVSTBR 2,5/7-STF	18 35 52 0
MVSTBR 2,5/8-STF	18 35 53 3
MVSTBR 2,5/9-STF	18 35 54 6
MVSTBR 2,5/10-STF	18 35 55 9
MVSTBR 2,5/11-STF	18 35 56 2
MVSTBR 2,5/12-STF	18 35 57 5
MVSTBR 2,5/13-STF	18 35 58 8
MVSTBR 2,5/14-STF	18 35 59 1
MVSTBR 2,5/15-STF	18 35 60 1
MVSTBR 2,5/16-STF	18 35 61 4
MVSTBR 2,5/17-STF	18 35 62 7
MVSTBR 2,5/18-STF	18 35 63 0
MVSTBR 2,5/19-STF	18 35 64 3
MVSTBR 2,5/20-STF	18 35 65 6

MVSTBR 2,5/2-STF-5,08	18 35 09 6
MVSTBR 2,5/3-STF-5,08	18 35 10 6
MVSTBR 2,5/4-STF-5,08	18 35 11 9
MVSTBR 2,5/5-STF-5,08	18 35 12 2
MVSTBR 2,5/6-STF-5,08	18 35 13 5
MVSTBR 2,5/7-STF-5,08	18 35 14 8
MVSTBR 2,5/8-STF-5,08	18 35 15 1
MVSTBR 2,5/9-STF-5,08	18 35 16 4
MVSTBR 2,5/10-STF-5,08	18 35 17 7
MVSTBR 2,5/11-STF-5,08	18 35 18 0
MVSTBR 2,5/12-STF-5,08	18 35 19 3
MVSTBR 2,5/13-STF-5,08	18 35 20 3
MVSTBR 2,5/14-STF-5,08	18 35 21 6
MVSTBR 2,5/15-STF-5,08	18 35 22 9
MVSTBR 2,5/16-STF-5,08	18 35 23 2
MVSTBR 2,5/17-STF-5,08	18 35 24 5
MVSTBR 2,5/18-STF-5,08	18 35 25 8
MVSTBR 2,5/19-STF-5,08	18 35 26 1
MVSTBR 2,5/20-STF-5,08	18 35 27 4



Type	Order No.
MVSTBW 2,5/2-ST	17 92 52 4
MVSTBW 2,5/3-ST	17 92 53 7
MVSTBW 2,5/4-ST	17 92 54 0
MVSTBW 2,5/5-ST	17 92 55 3
MVSTBW 2,5/6-ST	17 92 56 6
MVSTBW 2,5/7-ST	17 92 57 9
MVSTBW 2,5/8-ST	17 92 58 2
MVSTBW 2,5/9-ST	17 92 59 5
MVSTBW 2,5/10-ST	17 92 60 5
MVSTBW 2,5/11-ST	17 92 61 8
MVSTBW 2,5/12-ST	17 92 62 1
MVSTBW 2,5/13-ST	17 92 63 4
MVSTBW 2,5/14-ST	17 92 64 7
MVSTBW 2,5/15-ST	17 92 65 0
MVSTBW 2,5/16-ST	17 92 66 3
MVSTBW 2,5/17-ST	17 92 67 6
MVSTBW 2,5/18-ST	17 92 68 9
MVSTBW 2,5/19-ST	17 92 69 2
MVSTBW 2,5/20-ST	17 92 70 2
MVSTBW 2,5/21-ST	17 92 71 5
MVSTBW 2,5/22-ST	17 92 72 8
MVSTBW 2,5/23-ST	17 92 73 1
MVSTBW 2,5/24-ST	17 92 74 4

MVSTBW 2,5/2-ST-5,08	17 92 75 7
MVSTBW 2,5/3-ST-5,08	17 92 76 0
MVSTBW 2,5/4-ST-5,08	17 92 77 3
MVSTBW 2,5/5-ST-5,08	17 92 78 6
MVSTBW 2,5/6-ST-5,08	17 92 79 9
MVSTBW 2,5/7-ST-5,08	17 92 80 9
MVSTBW 2,5/8-ST-5,08	17 92 81 2
MVSTBW 2,5/9-ST-5,08	17 92 82 5
MVSTBW 2,5/10-ST-5,08	17 92 83 8
MVSTBW 2,5/11-ST-5,08	17 92 84 1
MVSTBW 2,5/12-ST-5,08	17 92 85 4
MVSTBW 2,5/13-ST-5,08	17 92 86 7
MVSTBW 2,5/14-ST-5,08	17 92 87 0
MVSTBW 2,5/15-ST-5,08	17 92 88 3
MVSTBW 2,5/16-ST-5,08	17 92 89 6
MVSTBW 2,5/17-ST-5,08	17 92 90 6
MVSTBW 2,5/18-ST-5,08	17 92 91 9
MVSTBW 2,5/19-ST-5,08	17 92 92 2
MVSTBW 2,5/20-ST-5,08	17 92 93 5
MVSTBW 2,5/21-ST-5,08	17 92 94 8
MVSTBW 2,5/22-ST-5,08	17 92 95 1
MVSTBW 2,5/23-ST-5,08	17 92 96 4
MVSTBW 2,5/24-ST-5,08	17 92 97 7



Type	Order No.
MVSTBW 2,5/2-STF	18 35 28 7
MVSTBW 2,5/3-STF	18 35 29 0
MVSTBW 2,5/4-STF	18 35 30 0
MVSTBW 2,5/5-STF	18 35 31 3
MVSTBW 2,5/6-STF	18 35 32 6
MVSTBW 2,5/7-STF	18 35 33 9
MVSTBW 2,5/8-STF	18 35 34 2
MVSTBW 2,5/9-STF	18 35 35 5
MVSTBW 2,5/10-STF	18 35 36 8
MVSTBW 2,5/11-STF	18 35 37 1
MVSTBW 2,5/12-STF	18 35 38 4
MVSTBW 2,5/13-STF	18 35 39 7
MVSTBW 2,5/14-STF	18 35 40 7
MVSTBW 2,5/15-STF	18 35 41 0
MVSTBW 2,5/16-STF	18 35 42 3
MVSTBW 2,5/17-STF	18 35 43 6
MVSTBW 2,5/18-STF	18 35 44 9
MVSTBW 2,5/19-STF	18 35 45 2
MVSTBW 2,5/20-STF	18 35 46 5

MVSTBW 2,5/2-STF-5,08	18 34 90 3
MVSTBW 2,5/3-STF-5,08	18 34 91 6
MVSTBW 2,5/4-STF-5,08	18 34 92 9
MVSTBW 2,5/5-STF-5,08	18 34 93 2
MVSTBW 2,5/6-STF-5,08	18 34 94 5
MVSTBW 2,5/7-STF-5,08	18 34 95 8
MVSTBW 2,5/8-STF-5,08	18 34 96 1
MVSTBW 2,5/9-STF-5,08	18 34 97 4
MVSTBW 2,5/10-STF-5,08	18 34 98 7
MVSTBW 2,5/11-STF-5,08	18 34 99 0
MVSTBW 2,5/12-STF-5,08	18 35 00 9
MVSTBW 2,5/13-STF-5,08	18 35 01 2
MVSTBW 2,5/14-STF-5,08	18 35 02 5
MVSTBW 2,5/15-STF-5,08	18 35 03 8
MVSTBW 2,5/16-STF-5,08	18 35 04 1
MVSTBW 2,5/17-STF-5,08	18 35 05 4
MVSTBW 2,5/18-STF-5,08	18 35 06 7
MVSTBW 2,5/19-STF-5,08	18 35 07 0
MVSTBW 2,5/20-STF-5,08	18 35 08 3

