

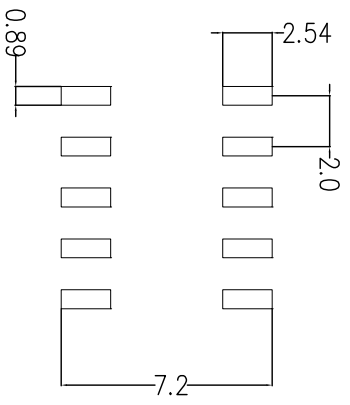


REV.	DESCRIPTION	DATE

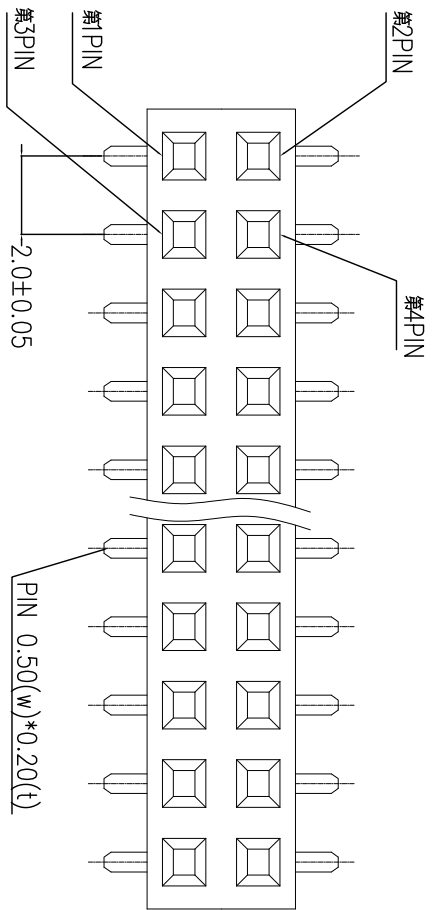

PCB Layout

- NOTE:
- Material:
- Housing: Polyester, UL94V-0.
 - Terminal: Copper alloy, Gold-plated.
- Electrical:
- Current rating: 2 Amp.
 - Contact resistance: 30mΩ Max.
 - Insulator resistance: 3000MΩ Min.
 - Dielectric withstand: AC 500 V.
 - Temperature: -40°C ~ +105°C
- Available pins: 06~100 contacts

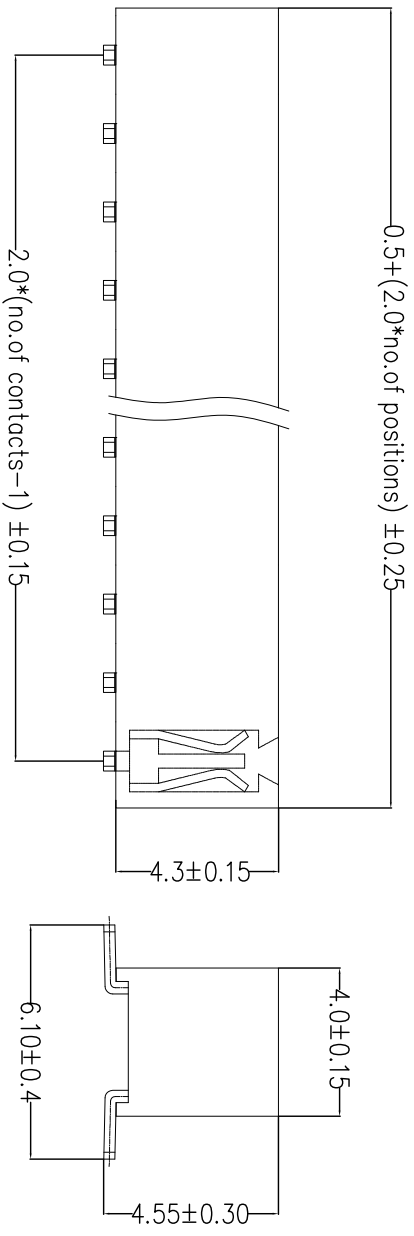

<p>TOLERANCE</p> <p>X ± XX</p> <p>XX ± XX</p> <p>XXX ± XX</p>		<p>DRAWER</p> <p><i>Chiu Chuan Siao</i></p>	
<p>CHECK</p> <p><i>Shi Jiong Siao</i></p>		<p>DESIGNED</p> <p><i>Chiu Chuan Siao</i></p>	
<p>UNITS : mm</p>		<p>APPROVAL</p> <p><i>Shaw Tseng Siao</i></p>	
<p>SCALE</p> <p>FREE</p>		<p>DATE</p> <p>12 / 10 / 2010</p>	
<p>SIZE</p> <p>A4</p>		<p>PART NO.</p> <p>F200-H43-DSMT-XX</p>	
<p>SHEET</p> <p>1 OF 1</p>		<p>REV.</p> <p>F200-H43-DSMT</p>	
<p>SynLight 日亮電子科技有限公司</p> <p><i>Sun-Light Electronic Technologies Inc.</i></p>			
<p>NAME</p> <p>2.0mm Female Header H:4.3 W:4.0 SMT type</p> <p>雙排Double row</p>			