

INTRODUCTION:

Adam Tech right angle PCB mount .590" footprint D-Sub connectors are a popular interface for many I/O applications. Offered in 9, 15, 25 and 37 positions they are an excellent choice for a low cost industry standard connection. They are available with full or half size PCB side mounting flanges. Adam Tech connectors are manufactured with precision stamped contacts offering a choice of contact plating and a wide selection of mating and mounting options.

FEATURES:

- Half or Full flange options
- Industry standard compatibility
- Durable metal shell design
- Precision formed contacts
- Variety of Mating and mounting options

MATING CONNECTORS:

Adam Tech D-Subminiatures and all industry standard D-Subminiature connectors.

SPECIFICATIONS:

Material:

Standard insulator: PBT, 30% glass reinforced, rated UL94V-0
 Optional Hi-Temp insulator: Nylon 6T
 Insulator Color: Black
 Contacts: Phosphor Bronze
 Shell: Steel, Tin or Zinc plated
 Hardware: Brass, Nickel plated

Contact Plating:

Gold over Nickel underplate on contact area.

Electrical:

Operating voltage: 250V AC / DC max.
 Current rating: 5 Amps max.
 Contact resistance: 20 mΩ max. Initial
 Insulation resistance: 5000 MΩ min.
 Dielectric withstanding voltage: 1000V AC for 1 minute

Mechanical:

Insertion force: 0.75 lbs max
 Extraction force: 0.44 lbs min

Temperature Rating:

Operating temperature: -55°C to +105°C
 Soldering process temperature:
 Standard insulator: 235°C
 Hi-Temp insulator: 260°C

PACKAGING:

Anti-ESD plastic trays

APPROVALS AND CERTIFICATIONS:

UL Recognized & CSA Certified, File no. E224053



ORDERING INFORMATION

DB25

SQ

SA

4

SHELL SIZE/ POSITIONS

DE09 = 9 Position
 DA15 = 15 Position
 DB25 = 25 Position
 DC37 = 37 Position

CONTACT TYPE

PQ = Plug,
 .590" Footprint
 SQ = Socket,
 .590" Footprint

MATING FACE MOUNTING OPTIONS

3 = #4-40 fixed jack screws
 4 = #4-40 flush threaded inserts
 5 = #4-40 flush threaded inserts with removable jack screws installed
 6 = .120" non-threaded mounting holes

* See Mounting Option diagrams page 80

PCB MOUNTING OPTIONS

SA = Wrap around ground straps with thru holes on half flange
 SB = Wrap around ground straps with thru holes on full flange
 SC = Top side only ground straps with thru holes on half flange
 SD = Top side only ground straps with thru holes on full flange
 F = Forked boardlocks on half flange
 R = Forked boardlocks on full flange

* See Mounting Option diagrams page 80

OPTIONS:

Add designator(s) to end of part number

15 = 15 μin gold plating in contact area

30 = 30 μin gold plating in contact area

EMI = Ferrite filtered version for EMI/RFI suppression

LPJ = Loose packed jackscrews
 F = Superior retention 4 prong boardlocks

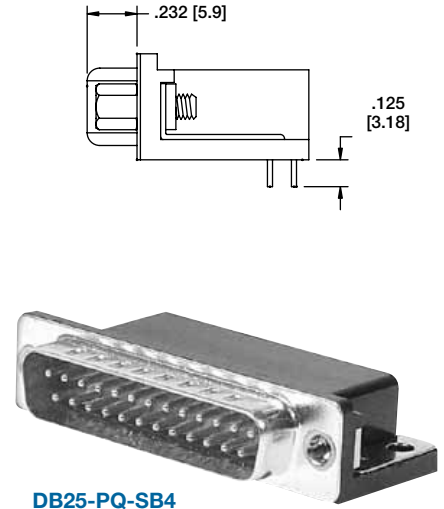
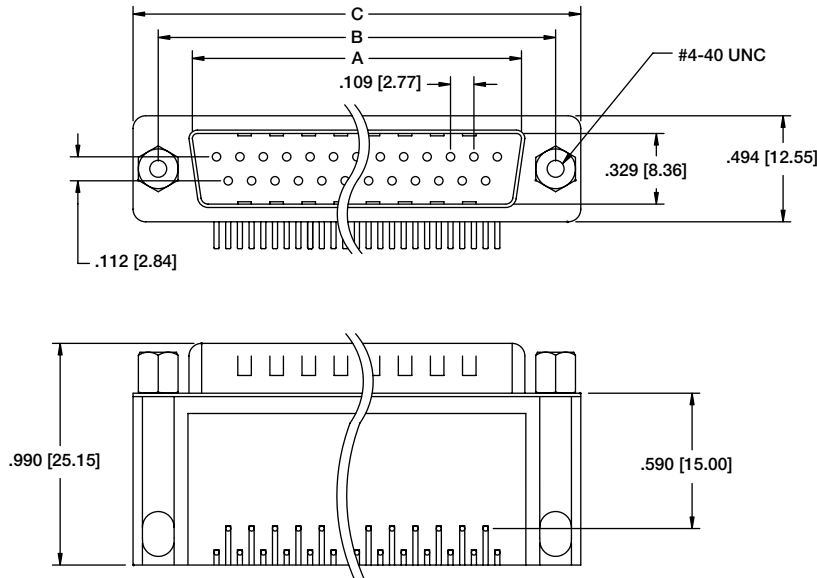
HT = Hi-Temp insulator for Hi-Temp soldering processes up to 260°C

R = Round jackscrews





PLUG

See pg. 80 for Mounting Options




SOCKET

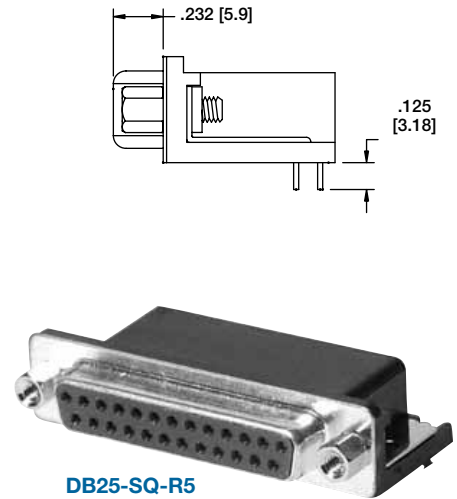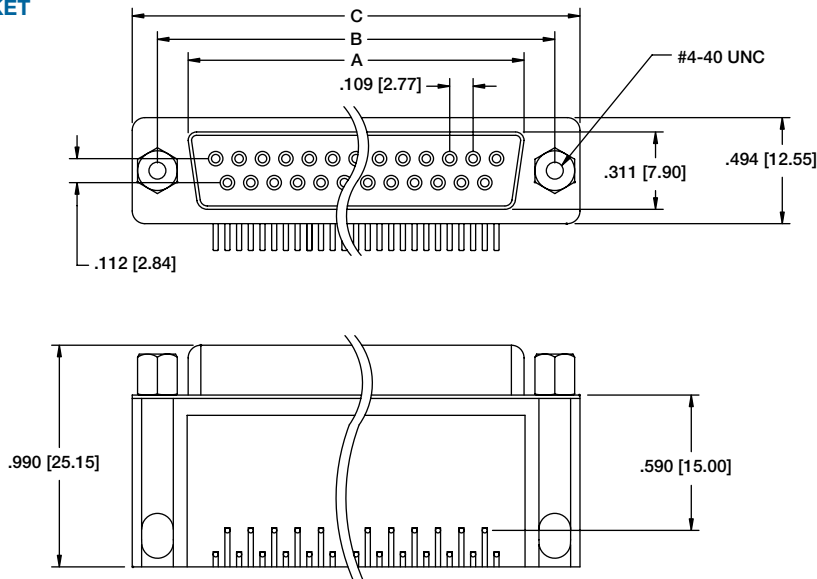


Unit: Inch [mm]

Pos.	PLUG	SOCKET	DIMENSIONS	
	A	A	B	C
9	.666 [16.92]	.643 [16.33]	.984 [24.99]	1.213 [30.81]
15	.994 [25.25]	.971 [24.66]	1.312 [33.32]	1.541 [39.14]
25	1.534 [38.96]	1.511 [38.38]	1.852 [47.04]	2.088 [53.04]
37	2.182 [55.43]	2.159 [54.84]	2.500 [63.50]	2.729 [69.32]

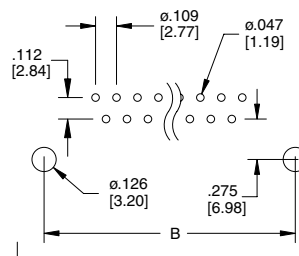Half Flange PCB Layout for PCB mounting options (SA, SC, F)



















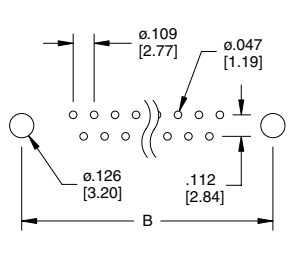Full Flange PCB Layout for PCB mounting options (SB, SD, R)



PCB Edge

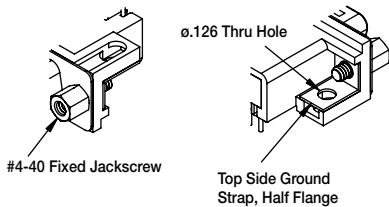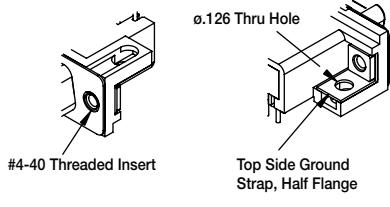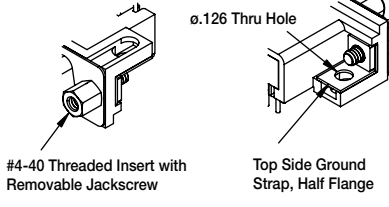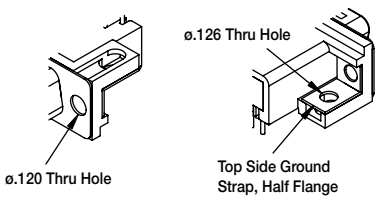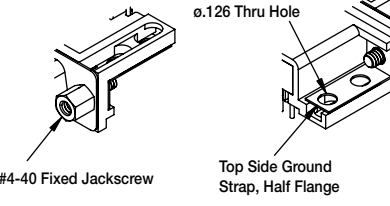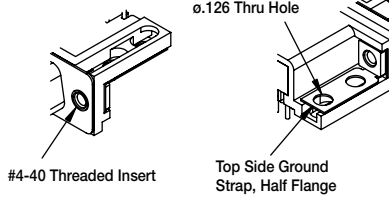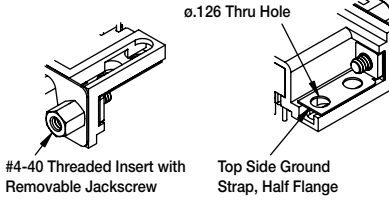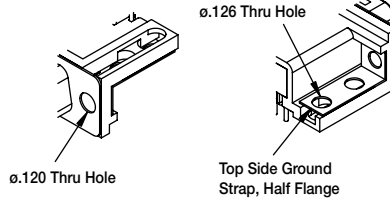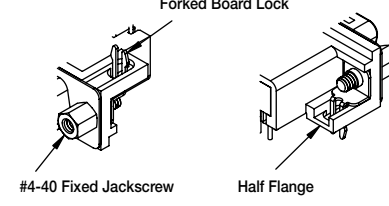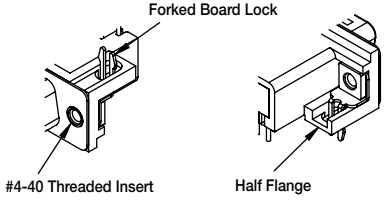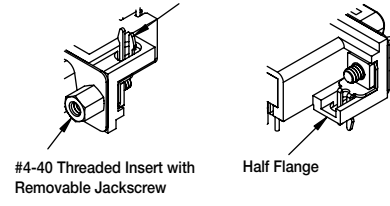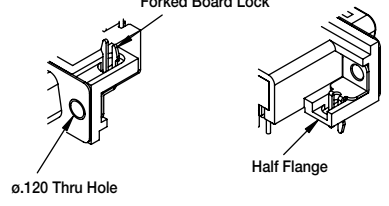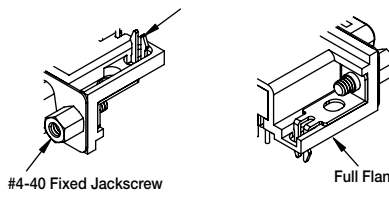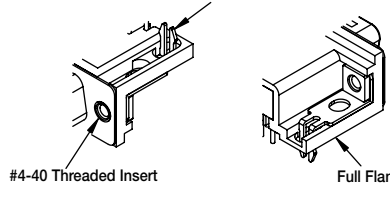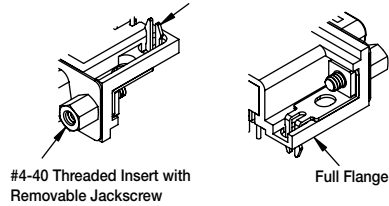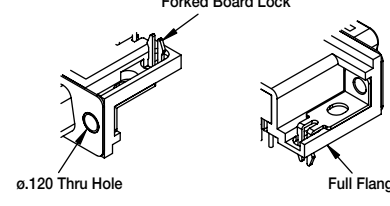Mating Face & PCB Mounting Options

<p>OPTION SC3</p>  <p>#4-40 Fixed Jackscrew</p> <p>0.126 Thru Hole</p> <p>Top Side Ground Strap, Half Flange</p>	<p>OPTION SC4</p>  <p>#4-40 Threaded Insert</p> <p>0.126 Thru Hole</p> <p>Top Side Ground Strap, Half Flange</p>	<p>OPTION SC5</p>  <p>#4-40 Threaded Insert with Removable Jackscrew</p> <p>0.126 Thru Hole</p> <p>Top Side Ground Strap, Half Flange</p>	
<p>OPTION SC6</p>  <p>0.120 Thru Hole</p> <p>Top Side Ground Strap, Half Flange</p>	<p>OPTION SD3</p>  <p>#4-40 Fixed Jackscrew</p> <p>0.126 Thru Hole</p> <p>Top Side Ground Strap, Half Flange</p>	<p>OPTION SD4</p>  <p>#4-40 Threaded Insert</p> <p>0.126 Thru Hole</p> <p>Top Side Ground Strap, Half Flange</p>	
<p>OPTION SD5</p>  <p>#4-40 Threaded Insert with Removable Jackscrew</p> <p>0.126 Thru Hole</p> <p>Top Side Ground Strap, Half Flange</p>	<p>OPTION SD6</p>  <p>0.120 Thru Hole</p> <p>0.126 Thru Hole</p> <p>Top Side Ground Strap, Half Flange</p>	<p>OPTION F3</p>  <p>#4-40 Fixed Jackscrew</p> <p>Forked Board Lock</p> <p>Half Flange</p>	
<p>OPTION F4</p>  <p>#4-40 Threaded Insert</p> <p>Forked Board Lock</p> <p>Half Flange</p>	<p>OPTION F5</p>  <p>#4-40 Threaded Insert with Removable Jackscrew</p> <p>Forked Board Lock</p> <p>Half Flange</p>	<p>OPTION F6</p>  <p>0.120 Thru Hole</p> <p>Forked Board Lock</p> <p>Half Flange</p>	
<p>OPTION R3</p>  <p>#4-40 Fixed Jackscrew</p> <p>Forked Board Lock</p> <p>Full Flange</p>	<p>OPTION R4</p>  <p>#4-40 Threaded Insert</p> <p>Forked Board Lock</p> <p>Full Flange</p>	<p>OPTION R5</p>  <p>#4-40 Threaded Insert with Removable Jackscrew</p> <p>Forked Board Lock</p> <p>Full Flange</p>	
<p>OPTION R6</p>  <p>0.120 Thru Hole</p> <p>Forked Board Lock</p> <p>Full Flange</p>			