

ABSOLUTE MAXIMUM RATINGS


Forward Current	IF	80mA
Reverse Voltage	VR	10V
Operating Temperature	Topr	-20 to +70°C
Storage Temperature	Tstg	-30 to +80°C

ELECTRO-OPTICAL CHARACTERISTICS (Ta=25°C)


PARAMETER	SYMBOL	MIN	TYP	MAX	UNIT	CONDITIONS
Forward Voltage	VF	7.6	8.2	8.8	V	IF=40mA
Reverse Current	IR			80	μA	VR=10V
Peak Wavelength	λp		565		nm	IF=40mA
Spectral Line Half Width	Δλ		40		nm	IF=40mA
Brightness	B	60			cd/m ²	IF=40mA

MECHANICAL OUTLINE

CIRCUIT DIAGRAM

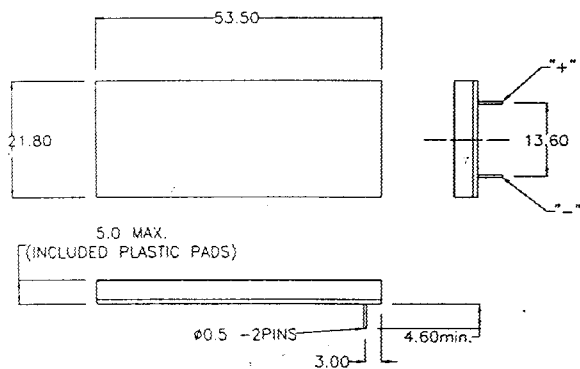

ALL DIMENSION IN mm
NO SCALE
TOL. +/-0.3mm

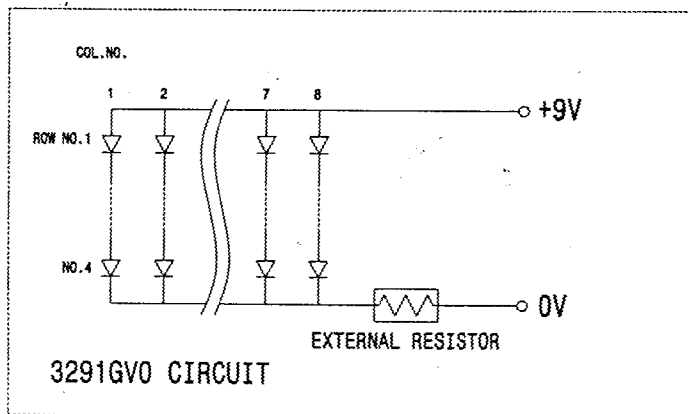

MICRO ELECTRONICS LTD.

38, Hung To Road, Microtron Building, Kwun Tong, Kowloon, Hong Kong.
Kwun Tong P.O. Box 69477 Hong Kong. Fax No. 2341 0321 Telex: 43510 Micro Hx. Tel: 2343 0181-5

Rev A