

PRELIMINARY

Chip Inductors - M0805CS Series (2012)

The M0805CS inductors provide exceptional Q values, even at high frequencies. They have a ceramic body and wire wound construction to provide the highest SRFs available in 0805 size.

This robust version of Coilcraft's standard 0805CS series features a high temperature encapsulant that allows operation in ambient temperatures up to 155°C and a leach-resistant base metalization with 63/37 tin-lead terminations that ensures the best possible board adhesion.

Part number ¹	Inductance ² (nH)	Percent tolerance	Q min ³	SRF typ ⁴ (MHz)	DCR max ⁵ (Ohms)	Irms ⁶ (mA)	Color code
M0805CS-020X	2.8 @ 250 MHz	5	80 @ 1500 MHz	12200	0.06	800	Gray
M0805CS-3N0X	3.0 @ 250 MHz	5	65 @ 1500 MHz	12200	0.06	800	White
M0805CS-030X	3.3 @ 250 MHz	5	50 @ 1500 MHz	12200	0.08	600	Black
M0805CS-050X	5.6 @ 250 MHz	5	65 @ 1000 MHz	5900	0.08	600	Orange
M0805CS-060X	6.8 @ 250 MHz	5	50 @ 1000 MHz	5600	0.11	600	Brown
M0805CS-070X	7.5 @ 250 MHz	5	50 @ 1000 MHz	4800	0.14	600	Green
M0805CS-080X	8.2 @ 250 MHz	5,2	50 @ 1000 MHz	4400	0.12	600	Red
M0805CS-100X	10 @ 250 MHz	5,2	60 @ 500 MHz	4300	0.10	600	Blue
M0805CS-120X	12 @ 250 MHz	5,2	50 @ 500 MHz	4000	0.15	600	Orange
M0805CS-150X	15 @ 250 MHz	5,2	50 @ 500 MHz	3200	0.17	600	Yellow
M0805CS-180X	18 @ 250 MHz	5,2	50 @ 500 MHz	3100	0.20	600	Green
M0805CS-220X	22 @ 250 MHz	5,2	55 @ 500 MHz	2600	0.22	500	Blue
M0805CS-240X	24 @ 250 MHz	5,2	50 @ 500 MHz	2400	0.22	500	Gray
M0805CS-270X	27 @ 250 MHz	5,2	55 @ 500 MHz	2580	0.25	500	Violet
M0805CS-330X	33 @ 250 MHz	5,2,1	60 @ 500 MHz	2150	0.27	500	Gray
M0805CS-360X	36 @ 250 MHz	5,2,1	55 @ 500 MHz	1900	0.27	500	Orange
M0805CS-390X	39 @ 250 MHz	5,2,1	60 @ 500 MHz	2000	0.29	500	White
M0805CS-430X	43 @ 200 MHz	5,2,1	60 @ 500 MHz	1800	0.34	500	Yellow
M0805CS-470X	47 @ 200 MHz	5,2,1	60 @ 500 MHz	1700	0.31	500	Black
M0805CS-560X	56 @ 200 MHz	5,2,1	60 @ 500 MHz	1600	0.34	500	Brown
M0805CS-680X	68 @ 200 MHz	5,2,1	60 @ 500 MHz	1500	0.38	500	Red
M0805CS-820X	82 @ 150 MHz	5,2,1	65 @ 500 MHz	1330	0.42	400	Orange
M0805CS-910X	91 @ 150 MHz	5,2,1	65 @ 500 MHz	1330	0.48	400	Black
M0805CS-101X	100 @ 150 MHz	5,2,1	65 @ 500 MHz	1250	0.46	400	Yellow
M0805CS-111X	110 @ 150 MHz	5,2	50 @ 250 MHz	1100	0.48	400	Brown
M0805CS-121X	120 @ 150 MHz	5,2,1	50 @ 250 MHz	1100	0.51	400	Green
M0805CS-151X	150 @ 100 MHz	5,2,1	50 @ 250 MHz	920	0.56	400	Blue
M0805CS-181X	180 @ 100 MHz	5,2,1	50 @ 250 MHz	920	0.64	400	Violet
M0805CS-221X	220 @ 100 MHz	5,2	50 @ 250 MHz	820	0.70	400	Gray
M0805CS-241X	240 @ 100 MHz	5,2	44 @ 250 MHz	770	1.00	350	Red
M0805CS-271X	270 @ 100 MHz	5,2	48 @ 250 MHz	730	1.00	350	White
M0805CS-331X	330 @ 100 MHz	5,2	48 @ 250 MHz	650	1.40	310	Black
M0805CS-391X	390 @ 100 MHz	5,2	48 @ 250 MHz	600	1.50	290	Brown
M0805CS-471X	470 @ 50 MHz	5,2,1	33 @ 100 MHz	375	1.76	250	Violet
M0805CS-561X	560 @ 25 MHz	5,2	23 @ 50 MHz	330	1.90	230	Orange
M0805CS-681X	680 @ 25 MHz	5,2	23 @ 50 MHz	310	2.20	190	Green
M0805CS-821X	820 @ 25 MHz	5,2	23 @ 50 MHz	310	2.35	180	Blue

1. When ordering, please specify **tolerance** code:

M0805CS-821X **G**

Tolerance: F = 1% G = 2% J = 5%

- Inductance measured using a Coilcraft SMD-A fixture in an Agilent/HP 4286A impedance analyzer with Coilcraft-provided correlation pieces.
 - Q measured using an Agilent/HP 4291A with an Agilent/HP 16193 test fixture.
 - SRF measured using an Agilent/HP 8720D network analyzer and a Coilcraft SMD-D test fixture.
 - DCR measured on a Cambridge Technology micro-ohmmeter and a Coilcraft CCF858 test fixture.
 - Current that causes a 15°C temperature rise from 25°C ambient.
 - Electrical specifications at 25°C.
- Refer to Doc 362 "Soldering Surface Mount Components" before soldering.



Critical Products

These parts are preproduction products for electrical evaluation only.
Specification subject to change without notice.

Document M100-1 Revised 04/10/08

1102 Silver Lake Road
Cary IL 60013


Phone 800-981-0363
Fax 847-639-1508

E-mail cp@coilcraft.com
Web www.coilcraft.com/cp


PRELIMINARY

M0805CS Series (2012)


Typical Q vs Frequency

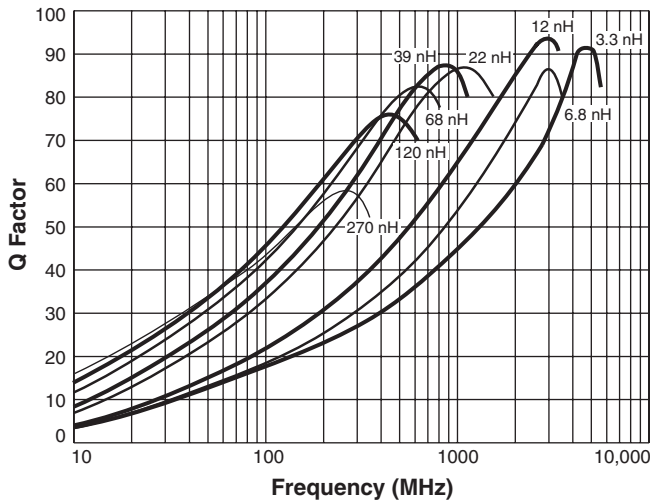

Typical L vs Frequency

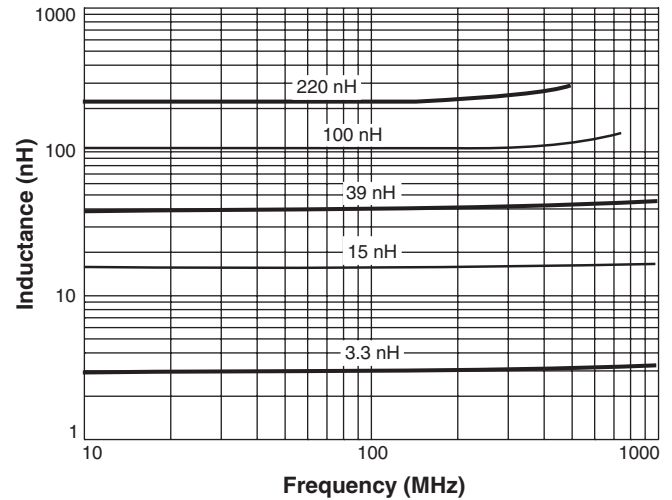

Irms Derating

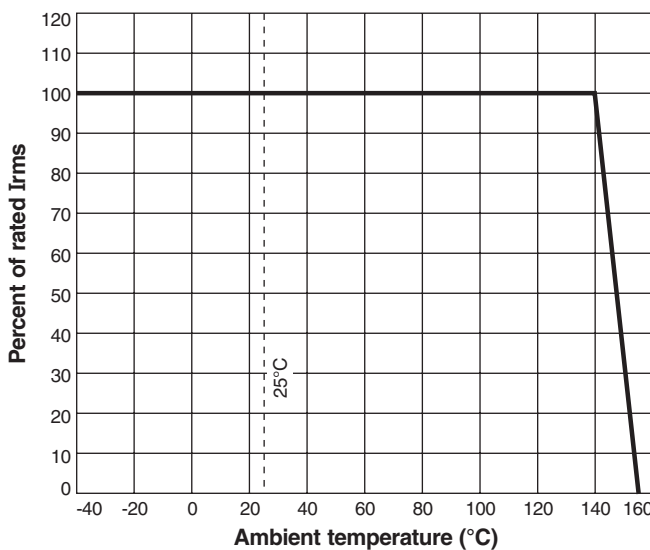

Core material Ceramic

Terminations Tin-lead (63/37) over silver-palladium-platinum-glass frit

Ambient temperature -55°C to +140°C with I_{rms} current, +140°C to +155°C with derated current


Storage temperature Component: -55°C to +155°C.
Packaging: -55°C to +80°C

Resistance to soldering heat Max three 40 second reflows at +260°C, parts cooled to room temperature between cycles

Temperature Coefficient of Inductance (TCL) +25 to +125 ppm/°C

Moisture Sensitivity Level (MSL) 1 (unlimited floor life at <30°C / 85% relative humidity)

Enhanced Crush-Resistant Packaging 2000 per 7" reel
Plastic tape: 8 mm wide, 0.23 mm thick, 4 mm pocket spacing, 1.65 mm pocket depth

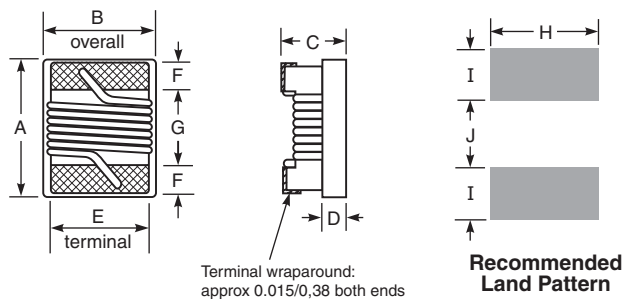

A max	B max	C max	D ref	E	F	G	H	I	J
0.090	0.068	0.060	0.020	0.050	0.020	0.040	0.070	0.040	0.030
2,29	1,73	1,52	0,51	1,27	0,51	1,02	1,78	1,02	0,76



These parts are preproduction products for electrical evaluation only.
Specification subject to change without notice.

Document M100-2 Revised 04/10/08

1102 Silver Lake Road
Cary IL 60013

Phone 800-981-0363
Fax 847-639-1508

E-mail cp@coilcraft.com
Web www.coilcraft.com/cp

COILCRAFT ACCURATE
PRECISION REPEATABLE
MEASUREMENTS
SEE INDEX **TEST FIXTURES**