


# Radial Leaded PTC

## 0ZRF Series

RoHS6 Compliant

0ZRF0607D



### Application

Telecommunication and data transmission

### Product Features

Telecom Power Cross Protection

### Operating (Hold Current) Range

0.08 A ~ 0.18A

### Maximum Voltage

60VDC

### Temperature Range

-40°C to 85°C

### Agency Approval


TUV (Std. EN60738-1-1, Cert. R50102125)

UL Component (Std. UL1434, File E305051)

#### UL Conditions of Acceptability:

1. These devices have been investigated for use in safety circuits and are suitable as a limiting device.
2. These devices have been calibrated to limit the current to 8 amps within 5 seconds, per ANSI/NFPA 70, "National Electrical Code"

## Product Dimensions

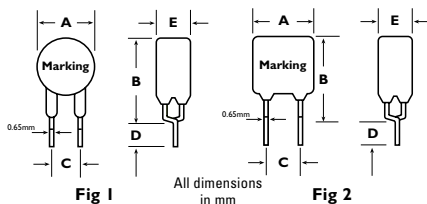

Part Number	Fig	Lead Size ∅	A		B		C		D		E	
			Max	Max	Typical	Min	Max	Min	Max			
0ZRF008FF	1	0.65	5.8	9.6	5	4.7	4.6					
0ZRF0011FF	1	0.65	6.8	9.9	5	4.7	4.6					
0ZRF0012FF	2	0.65	6.5	11.0	5	4.7	4.6					
0ZRF0015FF	2	0.65	6.5	11.0	5	4.7	4.6					
0ZRF0018FF	2	0.65	10.9	12.6	5	4.7	4.6					

## Standard Package

P/N	Bulk		Reel/Tape	
	Pcs/Box	P/N Code	Pcs/Reel	P/N Code
0ZRF008FF-0015FF	3000	1E	1500	2B
0ZRF0018FF	1000	1A	n/a	n/a

## Electrical Characteristics (23 °C)

	Part Number (Bulk)	Hold Current	Trip Current	Max Time to Trip @ 5xI <sub>H</sub>	Max Time to Trip @ 8A (See UL Note 2)	Max Current	Rated Voltage	Max Interrupt Voltage	Resistance Tolerance		
		I <sub>H</sub> , A	I <sub>T</sub> , A	Seconds	Seconds				R <sub>min</sub>	R <sub>max</sub>	R1 <sub>max</sub>
A	0ZRF008FF1E	0.08	0.16	4.1	0.010	3	60	250	14.0	22.00	33
B	0ZRF0011FF1E	0.11	0.22	5.5	0.050	3	60	250	5.0	11.00	16
C	0ZRF0012FF1E	0.12	0.24	5.7	0.050	3	60	250	4.0	12.00	16
D	0ZRF0015FF1E	0.15	0.29	6.8	0.100	3	60	250	3.0	7.50	12
E	0ZRF0018FF1A	0.18	0.65	20.0	0.100	10	60	250	0.8	2.20	4

**I<sub>H</sub>** Hold current-maximum current at which the device will not trip in still air at 23°C.

**I<sub>T</sub>** Trip current-minimum current at which the device will always trip in still air at 23°C.

**I<sub>max</sub>** Maximum fault current device can withstand without damage at rated voltage (V<sub>max</sub>).

**V<sub>max</sub>** Maximum voltage device can withstand without damage at its rated current.

**V<sub>Imax</sub>** The highest short duration (15 minutes or less) voltage that device can safely interrupt under specified fault conditions.

**P<sub>d</sub>** Typical power dissipated by device when in tripped state in 23°C still air environment.

**R<sub>min</sub>** Minimum device resistance at 23°C.

**R<sub>max</sub>** Maximum device resistance at 23°C.

**R1<sub>max</sub>** Maximum device resistance at 23°C, 1 hour after initial device trip.

## Physical specifications

### Lead material

Tin plated copper, 22 AWG.

### Soldering characteristics

MIL-STD-202, Method 208E.

### Insulating coating

Flame retardant epoxy, meets UL-94-V-0 requirements.

## PTC Marking

"bel" or "b", IH code and "RF".

### Note

0ZRF products are designed to assist equipment to comply with ITU, UL1950 and/or GR1089 specifications

### Caution

0ZRF devices are not intended for continuous use of Line Voltage such as 120 VAC ~ 600VAC and above.

# Radial Leaded PTC


## OZRF Series

RoHS6 Compliant


OZRF1006C

### Typical Time - To - Trip at 23°C

(See Elec. Characteristics Table for P/N - Curve Correlation)

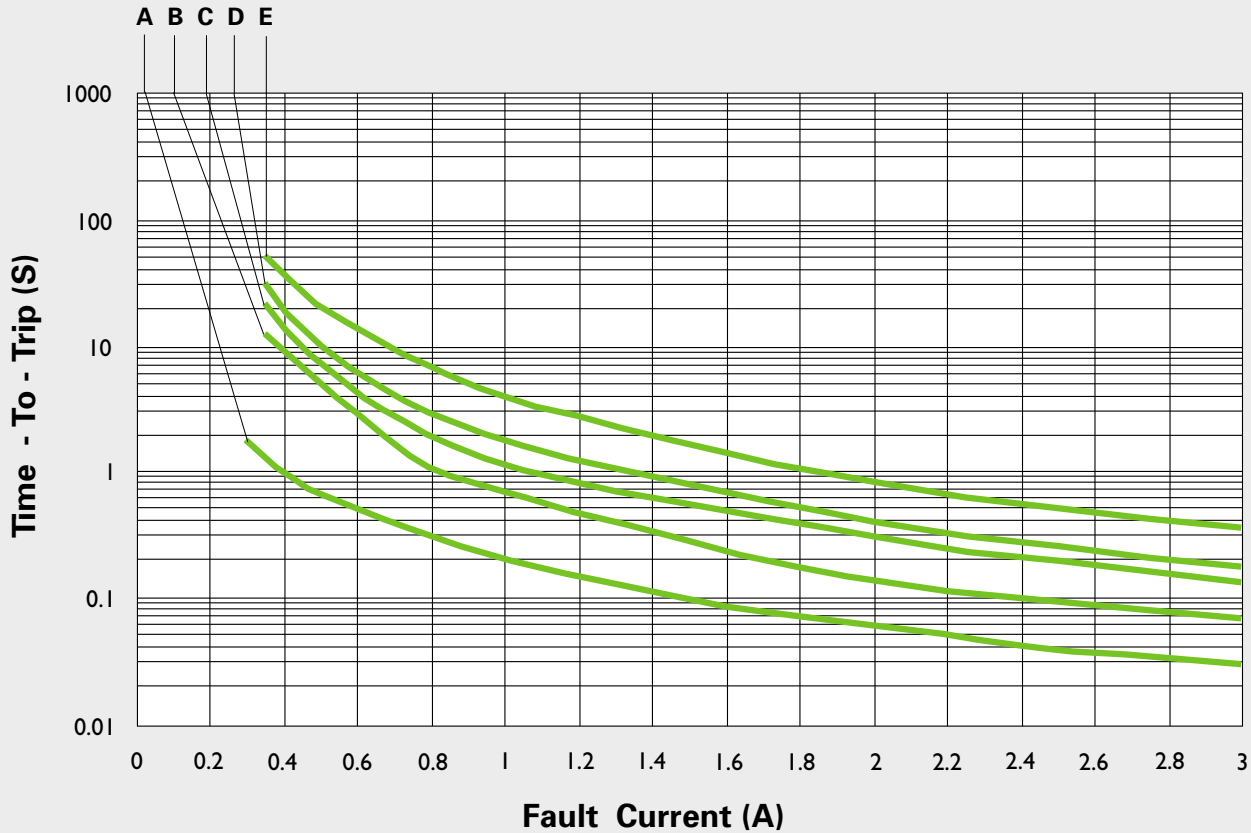

### Thermal Derating Curve

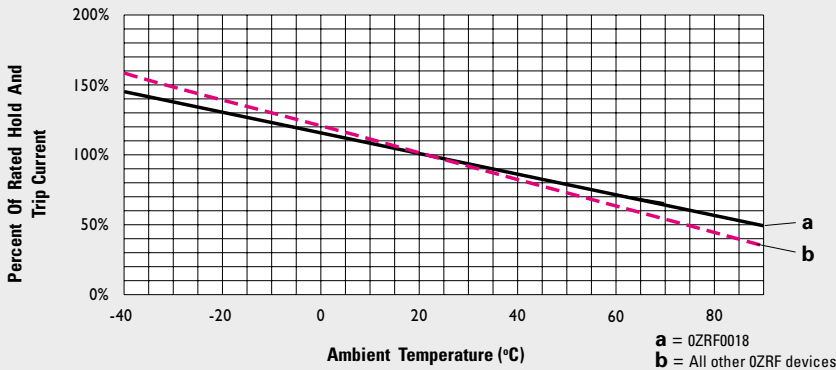

### Cautionary Notes

1. Operation beyond the specified maximum ratings or improper use may result in damage and possible electrical arcing and/or flame.
2. These Polymer PTC (PPTC) devices are intended for protection against occasional overcurrent/ overtemperature fault conditions and may not be suitable for use in applications where repeated and/ or prolonged fault conditions are anticipated.
3. Avoid contact of PTC device with chemical solvent. Prolonged contact may adversely impact the PTC performance.
4. These PTC devices may not be suitable for use in circuits with a large inductance, as the PTC trip can generate circuit voltage spikes above the PTC rated voltage.

Specifications subject to change without notice

#### Corporate Office

**Bel Fuse Inc.**  
 206 Van Vorst Street, Jersey City, NJ 07302  
 Tel: 201-432-0463  
 Fax: 201-432-9542  
 E-Mail: belfuse@belfuse.com  
 Website: www.belfuse.com

#### Far East Office

**Bel Fuse Ltd.**  
 8F/8 Luk Hop Street  
 San Po Kong  
 Kowloon, Hong Kong  
 Tel: 852-2328-5515  
 Fax: 852-2352-3706

#### European Office

**Bel Stewart GmbH**  
 Industriestrasse 20  
 61381 Friedrichsdorf  
 Germany  
 Tel: 49.6172.9552.0  
 Fax: 49.6172.9552.40