

SPECIFICATIONS

Mechanical

Plug Mating Force: 3.00kg (6.61Lb) max.
Plug Unmating Force: 0.40~3.00kg (0.88~6.61Lb)
Contact Retention Force: 0.50kg (1.10Lb) min.
Durability: 5000 Cycles

Electrical


Current Rating: 1.00A
Contact Resistance: 50mW max.
Dielectric Withstanding Voltage: 500V AC/1min min.
Insulation Resistance: 100MW min.

Physical


Housing: Thermoplastic, UL 94V-0 rated
Contact: Copper alloy
Plating: See "ORDERING INFORMATION"
Operating Temperature: -25 to +85
Recommended Thickness of PCB: 1.60[.063]

Audio Jack Connector

JA Series
Triple Jack, R/A, T/H Type
 \varnothing 3.5mm [.138"]
13 Pos.

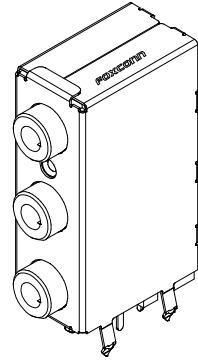

DRAWING

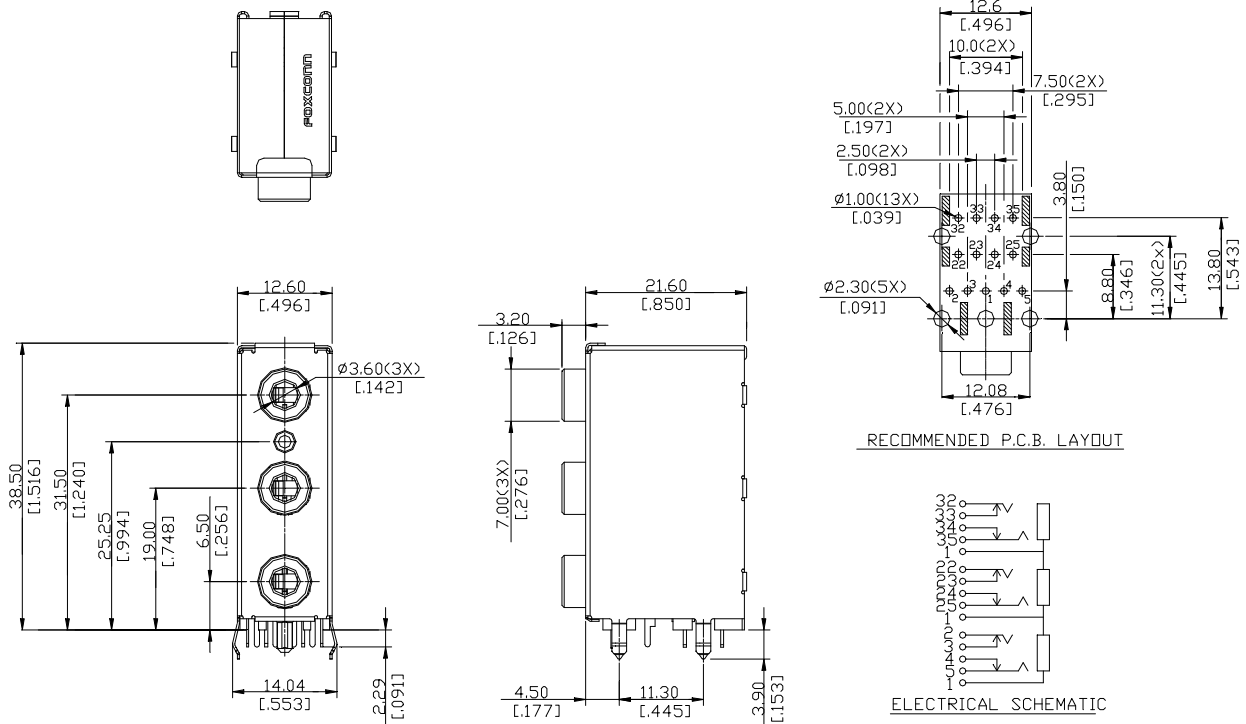

ORDERING INFORMATION

PRODUCT NO.: JA 3 3 3 3 * - H21P - 4F

Audio Jack Series
 Body Type
 3=Triple Jack
 Sleeve Style
 3=All Plastic Cylindrical
 Plug Type
 3=Three Band
 Plug Diameter
 3=3.50mm

Lead Free Code
 Extension Code
 Contact Area Plating
 1=Gold Flash
 F=Gold Flash(Lead Free)