


PC card drilling dimensions (after plating)  
(thickness 1.60 ± 0.20mm)

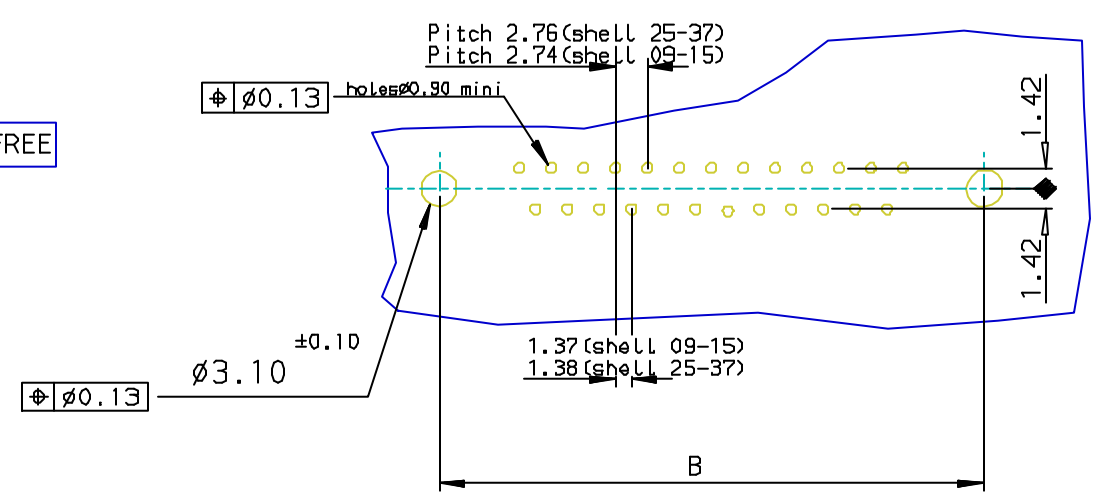

SHELL	A ± 0.38	B ± 0.12	C ± 0.10	D ± 0.25	G ± 0.25	Plating: 0.76µ AU	Plating: Flash AU
09	30.81	24.99	16.96	16.21	5.90	D09S23A6U*00**	D09S23A4U*00**
15	39.14	33.32	25.18	24.54	5.90	D15S23A6U*00**	D15S23A4U*00**
25	53.03	47.04	39.12	38.25	5.70	D25S23A6U*00**	D25S23A4U*00**
37	69.32	63.50	55.68	54.71	5.70	D37S23A6U*00**	D37S23A4U*00**

**REQUIREMENTS**

**Technical characteristics:**  
 Shell: steel tin/Zinc Cr3 plated  
 Insulators: self-extinguishing black polyster, UL class 94V0  
 Contacts size 20: phosphor bronze, gold on mating end, bright tin on termination end over nickel on entire contact  
 Cycles : 500 for protection 6  
           : 200 for protection 4  
 Harpoons: phosphor bronze, tin plated

Metal plate for electrical continuity: brass, tin/Zinc Cr3 plated  
 Screws locks: brass, tin/Zinc Cr3 plated torque: 0.5N/m

**Electrical characteristics:**  
 max. current rating: 5A  
 Test voltage: 1000V  
 Rated voltage: 300V  
 Contact resistance: < 15mΩ  
 Shell resistance: < 5mΩ  
 Insulation resistance: > 5000MΩ

**Climatic characteristics:**  
 Operating temperature range: -55°C +125°C

**Dimensions:**  
 in accordance with MIL-C-24308

LF FOR LEAD FREE

Threaded ØT M3 = I  
 Threaded ØT 4.40 = V

FOR ROHS DETAILS REFER DWG. NO: C01-8646-0000

European Views

www.fciconnect.com		surface ISO 1302 ✓	tolerance std ISO 406 ISO 1101	projection mm
TOLERANCES UNLESS OTHERWISE SPECIFIED				
Dr	JOHN SLEEBA	2000/11/22	ANGULAR	LINEAR
Eng	GEORGE VJ	2000/11/22	0.XX	±0.1
Chr	GEORGE VJ	2005/07/27	0.XXX	±0.1
Appr	KVSD	2005/07/27	0.XXX	±0.1
Product family			D-SUB	
title			SOCKET CONNECTOR DELTA D with SCREW LOCK AND METAL BRACKET.	
catalog no			DELTA-D	
Rev.			C	
dwg no			C01-8646-0738	
CUSTOMER			sheet 1 of 1	

rev	ecn no	dr	date
B	105-0124	JS	2005/07/27
C	106-0074	SK	2006/06/08
-	-	-	-
-	-	-	-
-	-	-	-
-	-	-	-



Copyright FCI.