

# ALUMINUM ELECTROLYTIC CAPACITORS


nichicon



3.95mmL MAX. Chip Type,  
Wide Temperature Range  
series




- Chip type with 3.95mmLMAX height. Operating over wide temperature range of -40 ~ +105°C.
- Designed for surface mounting on high density PC board.
- Applicable to automatic mounting machine using carrier tape.




## ■ Specifications

Item	Performance Characteristics							
Category Temperature Range	-40 ~ +105°C							
Rated Voltage Range	6.3 ~ 50V							
Rated Capacitance Range	0.1 ~ 100μF							
Capacitance Tolerance	±20% at 120Hz, 20°C							
Leakage Current	After 2 minutes' application of rated voltage, leakage current is not more than 0.01 CV or 3 (μA), whichever is greater.							
tan δ	Rated voltage (V)	6.3	10	16	25	35	50	120Hz 20°C
	tan δ (MAX.)	0.38	0.32	0.20	0.16	0.14	0.14	
Stability at Low Temperature	Rated voltage (V)	6.3	10	16	25	35	50	120Hz
	Impedance ratio Z-25°C / Z+20°C	6	5	3	3	3	3	
Z-40°C / Z+20°C	10	10	6	6	4	4		
Endurance	After 1000 hours' application of rated voltage at 105°C, capacitors meet the characteristic requirements listed at right.				Capacitance change	Within ±30% of initial value		
					tan δ	300% or less of initial specified value		
Shelf Life	After leaving capacitors under no load at 105°C for 1000 hours, they meet the specified value for endurance characteristics listed above.				Leakage current	Initial specified value or less		
Resistance to soldering heat	The capacitors shall be kept on the hot plate maintained at 250°C for 30 seconds. After removing from the hot plate and restored at room temperature, they meet the characteristic requirements listed at right.				Capacitance change	Within ±10% of initial value		
					tan δ	Initial specified value or less		
Marking	Black print on the case top.				Leakage current	Initial specified value or less		

## ■ Chip Type

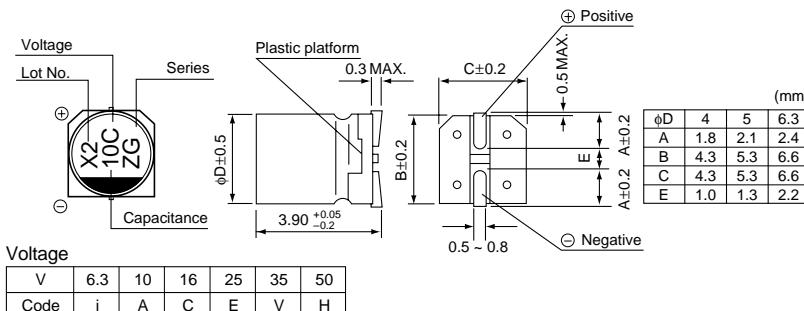

Type numbering system (Example : 16V 10μF)

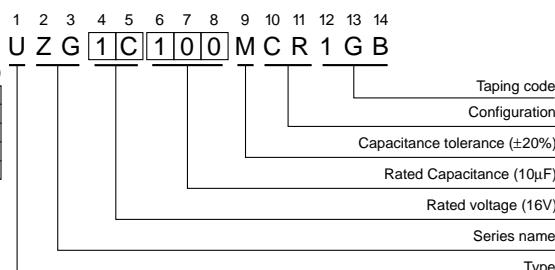

## ■ Dimensions

Cap. (μF)	Code	V		6.3	10	16	25	35	50
		0J	1A	1C	1E	1V	1H		
0.1	0R1								
0.22	R22								
0.33	R33								
0.47	R47								
1	010								
2.2	2R2								
3.3	3R3								
4.7	4R7								
10	100				4	16	5	20	5
22	220	4	19	5	24	5	26	6.3	36
33	330	5	26	5	30	6.3	35	6.3	
47	470	5	32	6.3	40	6.3	44		
100	101	6.3	52						

Rated Ripple (mA rms) at 105°C 120Hz

## ● Frequency coefficient of rated ripple current

Frequency	50 Hz	120 Hz	300 Hz	1 kHz	10 kHz
Coefficient	0.70	1.00	1.17	1.36	1.50

- Taping specifications are given in page 22.
- Recommended land size are given in page 23
- Please refer to page 3 for the minimum order quantity.