

- 1N52383 THRU 1N5314 AVAILABLE IN JANC
- CURRENT REGULATOR CHIPS
- ALL JUNCTIONS COMPLETELY PROTECTED WITH SILICON DIOXIDE
- ELECTRICALLY EQUIVALENT TO 1N5283 THRU 1N5314
- CONSTANT CURRENT OVER WIDE VOLTAGE RANGE
- HIGH SOURCE IMPEDANCE
- COMPATIBLE WITH ALL WIRE BONDING AND DIE ATTACH TECHNIQUES

CD5283
thru
CD5314

MAXIMUM RATINGS

Operating Temperature: -55°C to +175°C
Storage Temperature: -55°C to +175°C


ELECTRICAL CHARACTERISTICS @ 25°C, unless otherwise specified

TYPE NUMBER	REGULATOR CURRENT I _p (mA) @ V _T = 25V (Note 3)			MINIMUM DYNAMIC IMPEDANCE @ V _T = 25V Z _T (MΩ) (Note 1)	MINIMUM KNEE IMPEDANCE @ V _K = 6.0 V Z _K (MΩ) (Note 2)	MAXIMUM LIMITING VOLTAGE @ I _L = 0.8 I _p (min) V _L (VOLTS)
	NOM	MIN	MAX			
CD5283	0.22	0.198	0.242	25.0	2.75	1.00
CD5284	0.24	0.216	0.264	19.0	2.35	1.00
CD5285	0.27	0.243	0.297	14.0	1.95	1.00
CD5286	0.30	0.270	0.330	9.0	1.60	1.00
CD5287	0.33	0.297	0.363	6.6	1.35	1.00
CD5288	0.39	0.351	0.429	4.10	1.00	1.05
CD5289	0.43	0.387	0.473	3.30	0.870	1.05
CD5290	0.47	0.423	0.517	2.70	0.750	1.05
CD5291	0.56	0.504	0.616	1.90	0.560	1.10
CD5292	0.62	0.558	0.682	1.55	0.470	1.13
CD5293	0.68	0.612	0.748	1.35	0.400	1.15
CD5294	0.75	0.675	0.825	1.15	0.335	1.20
CD5295	0.82	0.738	0.902	1.00	0.290	1.25
CD5296	0.91	0.819	1.001	0.880	0.240	1.29
CD5297	1.00	0.900	1.100	0.800	0.205	1.35
CD5298	1.10	0.990	1.210	0.700	0.180	1.40
CD5299	1.20	1.06	1.32	0.640	0.155	1.45
CD5300	1.30	1.17	1.43	0.580	0.135	1.50
CD5301	1.40	1.26	1.54	0.540	0.115	1.55
CD5302	1.50	1.35	1.65	0.510	0.105	1.60
CD5303	1.60	1.44	1.76	0.475	0.092	1.65
CD5304	1.80	1.62	1.98	0.420	0.074	1.75
CD5305	2.00	1.80	2.20	0.395	0.061	1.85
CD5306	2.20	1.98	2.42	0.370	0.052	1.95
CD5307	2.40	2.16	2.64	0.345	0.044	2.00
CD5308	2.70	2.43	2.97	0.320	0.035	2.15
CD5309	3.00	2.70	3.30	0.300	0.029	2.25
CD5310	3.30	2.97	3.63	0.280	0.024	2.35
CD5311	3.60	3.24	3.96	0.265	0.020	2.50
CD5312	3.90	3.51	4.29	0.255	0.017	2.60
CD5313	4.30	3.87	4.73	0.245	0.014	2.75
CD5314	4.70	4.23	5.17	0.235	0.012	2.90

NOTE 1 Z_T is derived by superimposing A 90Hz RMS signal equal to 10% of V_T on V_T.

NOTE 2 Z_K is derived by superimposing A 90Hz RMS signal equal to 10% of V_K on V_K.

NOTE 3 I_p is read using a pulse measurement, 10 milliseconds maximum.

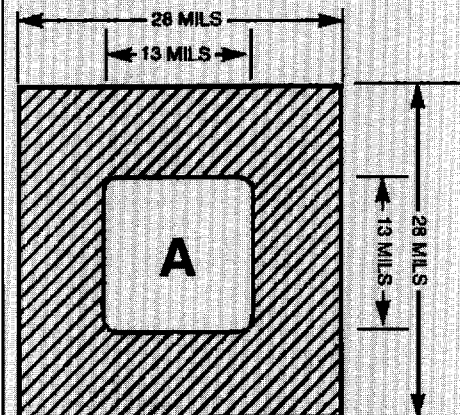

BACKSIDE IS CATHODE

A = Anode

DESIGN DATA

METALLIZATION:
Top: (Anode).....A1
Back: (Cathode).....Au

AL THICKNESS.....25,000 Å Min

GOLD THICKNESS...4,000 Å Min

CHIP THICKNESS.....10 Mils

TOLERANCES: ALL Dimensions
± 2 mils, Except Anode Pad
Where Tolerance is ± 0.1 mils.



COMPENSATED DEVICES INCORPORATED

166 TREMONT STREET, MELROSE, MASSACHUSETTS 02176
PHONE (617) 665-1071

FAX (617) 665-7379

151

CD5283 thru CD5314

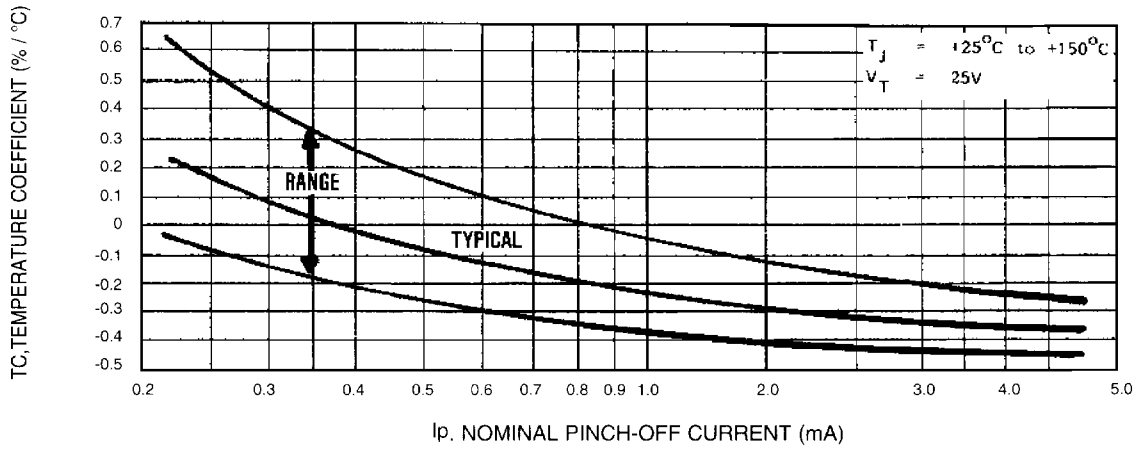


FIGURE 2 TEMPERATURE COEFFICIENT

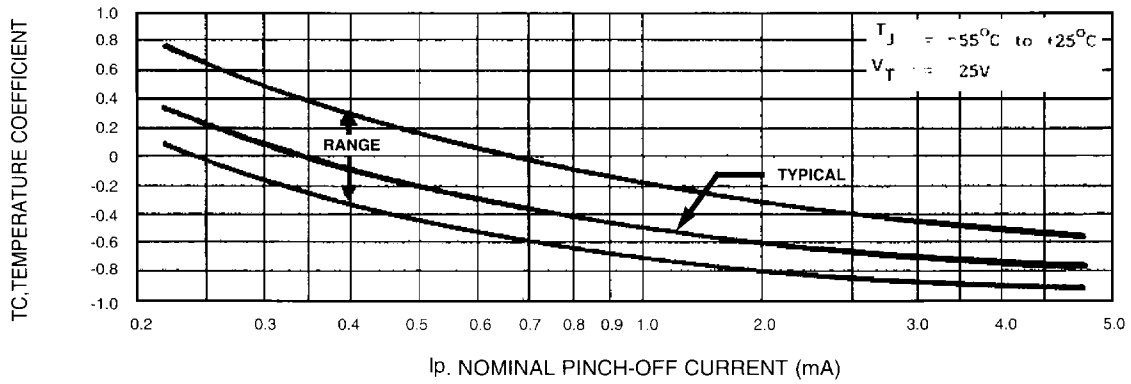


FIGURE 3 TEMPERATURE COEFFICIENT

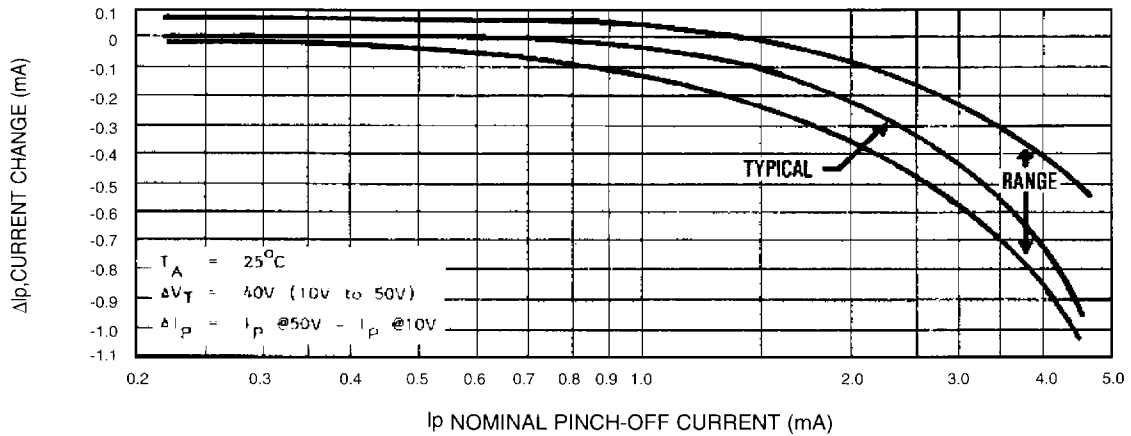


FIGURE 4 TEMPERATURE COEFFICIENT