

Kingbright Electronic Co., Ltd.



Mail Address: P. O. Box 81-153 Taipei, Taiwan
 Telex No. : 22249 TWNKIN


Cable Address : "TWNKIN" Taipei
 Telephones : 715-2848 • 713-0682

2 x 5mm RECTANGULAR LED LAMP

L-113

Unit: mm

Tolerance: ±0.2

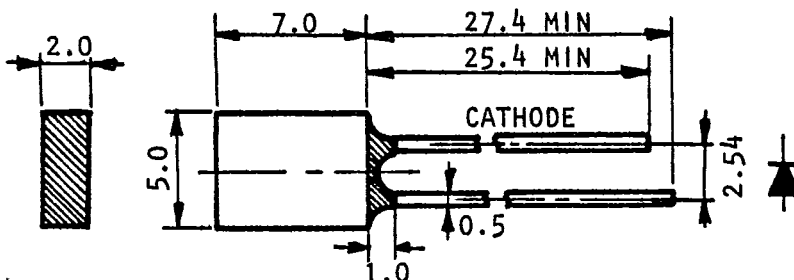

✓ - New

SELECTION GUIDE

PART NO.	SOURCE (DICE)	LENSE TYPE (RESIN)	AXIAL LUMINOUS INTENSITY IN MCD @ 20mA		VIEWING ANGLE
			MIN	TYP	
✓ L-113RD	RED (GaAsP)	Red Diffused	0.4	1.0	120°
✓ L-113RW		White Diffused	0.4	1.0	120°
✓ L-113RDT		Red Top Diffused	0.9	2.0	120°
✓ L-113HD	RED HIGH EFFICIENCY (GaP)	Red Diffused	0.8	1.4	120°
✓ L-113HW		White Diffused	0.8	1.4	120°
✓ L-113HDT		Red Top Diffused	1.0	2.5	120°
✓ L-113ID	RED INTENSITY (GaAsP/GaP)	Red Diffused	2.0	5.0	120°
✓ L-113IW		White Diffused	2.0	5.0	120°
✓ L-113IDT		Red Top Diffused	2.0	6.0	120°
✓ L-113GD	GREEN (GaP)	Green Diffused	2.0	3.0	120°
✓ L-113GW		White Diffused	2.0	3.0	120°
✓ L-113GDT		Green Top Diff.	2.0	2.4	120°
✓ L-113YD	YELLOW (GaAsP/GaP)	Yellow Diffused	2.0	5.0	120°
✓ L-113YW		White Diffused	2.0	6.0	120°
✓ L-113YDT		Yellow Top Diff.	2.0	6.0	120°
✓ L-113ED	ORANGE (GaAsP/GaP)	Orange Diffused	2.0	5.0	120°
✓ L-113EW		White Diffused	2.0	6.0	120°
✓ L-113EDT		Orange Top Diff.	2.0	6.0	120°