


# 1.3 $\mu$ m Laser Diode OL301A, OL303A

## DESCRIPTION

OKI OL301A, OL303A are 1.3 $\mu$ m InGaAsP/InP laser diodes developed as light sources for fiber-optic communications and optical equipment.

## FEATURES

- Low threshold current, typical 20mA
- High temperature operation, up to 70°C
- Stable fundamental transverse mode
- Long life, high reliability

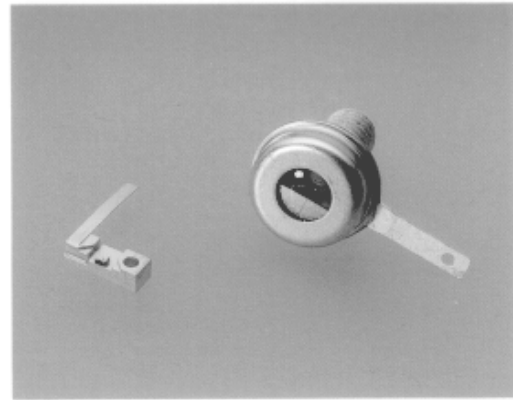

## ABSOLUTE MAXIMUM RATINGS

(Ta = 25°C)

Parameter	Symbol	Ratings	Unit
Optical Output	Po	10	mW
Reverse Voltage	Vr	2	V
Operating Temperature	Topr	-20 ~ +70	°C
Storage Temperature	Tstg	-40 ~ +100	°C

## OPTICAL AND ELECTRICAL CHARACTERISTICS

(Ta = 25°C)

Parameter	Symbol	Test Conditions	MIN	TYP	MAX	Unit
Threshold Current	Ith	—	—	20	35	mA
Optical Output	Po	If = Ith + 30mA	5	7	—	mW
Monitor Output	Pm	Po = 7mW	1	2.5	—	mW
Forward Voltage	Vf	If = Ith + 30mA	—	—	2	V
Peak Wavelength	$\lambda_p$	Po = 7mW	1280	1310	1330	nm
Spectral Half Width	$\Delta\lambda$	Po = 7mW	—	2	5	nm
Full Angle at Half Maximum (parallel)	$\theta_{\parallel}$	Po = 7mW	—	25	35	degree
Full Angle at Half Maximum (perpend.)	$\theta_{\perp}$	Po = 7mW	—	35	45	degree
Rise Time	tr	Ibias = Ith	—	0.3	0.5	ns
Fall Time	tf	Po = 7mW	—	0.5	0.8	ns

