




2SA733

PNP SILICON TRANSISTOR

LOW FREQUENCY AMPLIFIER PNP EPITAXIAL SILICON TRANSISTOR

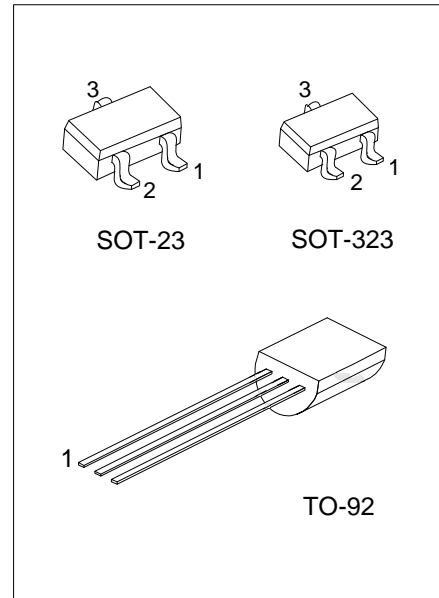

DESCRIPTION

The UTC **2SA733** is a low frequency amplifier.

FEATURES


- * Collector-emitter voltage:
BV_{CBO}=-50V
- * Collector current up to -150mA
- * High h_{FE} linearity
- * Complimentary to 2SC945

ORDERING INFORMATION

Ordering Number			Package	Pin Assignment			Packing
Normal	Lead Free	Halogen Free		1	2	3	
2SA733-x-AE3-R	2SA733L-x-AE3-R	2SA733G-x-AE3-R	SOT-23	E	B	C	Tape Reel
2SA733-x-AL3-R	2SA733L-x-AL3-R	2SA733G-x-AL3-R	SOT-323	E	B	C	Tape Reel
2SA733-x-T92-B	2SA733L-x-T92-B	2SA733G-x-T92-B	TO-92	E	C	B	Tape Box
2SA733-x-T92-K	2SA733L-x-T92-K	2SA733G-x-T92-K	TO-92	E	C	B	Bulk

<p>2SA733L-x-AE3-R</p>	<p>(1) B: Tape Box, K: Bulk, R: Tape Reel (2) AE3: SOT-23, AL3: SOT-323, T92: TO-92 (3) x: refer to Classification of h_{FE} (4) G: Halogen Free, L: Lead Free, Blank: Pb/Sn</p>
------------------------	---

MARKING (For SOT Package)

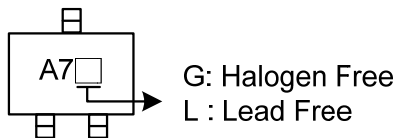

■ ABSOLUTE MAXIMUM RATING (Ta=25°C, unless otherwise specified)

PARAMETER		SYMBOL	RATINGS	UNIT
Collector-Base Voltage		V_{CBO}	-60	V
Collector-Emitter Voltage		V_{CEO}	-50	V
Emitter-Base Voltage		V_{EBO}	-5	V
Collector Dissipation	SOT-23	P_C	300	mW
	SOT-323		200	
	TO-92		625	
Collector Current		I_C	-150	mA
Junction Temperature		T_J	125	°C
Storage Temperature		T_{STG}	-55 ~ +150	°C

Note:1. Absolute maximum ratings are those values beyond which the device could be permanently damaged.
Absolute maximum ratings are stress ratings only and functional device operation is not implied.

■ ELECTRICAL CHARACTERISTICS (Ta=25°C, unless otherwise specified)

PARAMETER	SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNIT
Collector-Base Breakdown Voltage	BV_{CBO}	$I_C=-100\mu A, I_E=0$	-60			V
Collector-Emitter Breakdown Voltage	BV_{CEO}	$I_C=-10mA, I_B=0$	-50			V
Collector-Emitter Saturation Voltage	$V_{CE(SAT)}$	$I_C=-100mA, I_B=-10mA$		-0.1	-0.3	V
Collector Cut-Off Current	I_{CBO}	$V_{CB}=-40V, I_E=0$			-100	nA
Emitter Cut-Off Current	I_{EBO}	$V_{EB}=-3V, I_C=0$			-100	nA
DC Current Gain	h_{FE}	$V_{CE}=-6V, I_C=-1mA$	90		600	
Current Gain Bandwidth Product	f_T	$V_{CE}=-10V, I_C=-50mA$	100	190		MHz
Output Capacitance	C_{ob}	$V_{CB}=-10V, I_E=0, f=1MHz$		2.0	3.0	pF
Noise Figure	NF	$I_C=-0.1mA, V_{CE}=-6V$ $R_G=10k\Omega, f=100Hz$		4.0	6.0	dB

■ CLASSIFICATION OF h_{FE}

RANK	R	Q	P	K
RANGE	90-180	135-270	200-400	300-600

■ TYPICAL CHARACTERISTICS

Fig.1 Static Characteristics

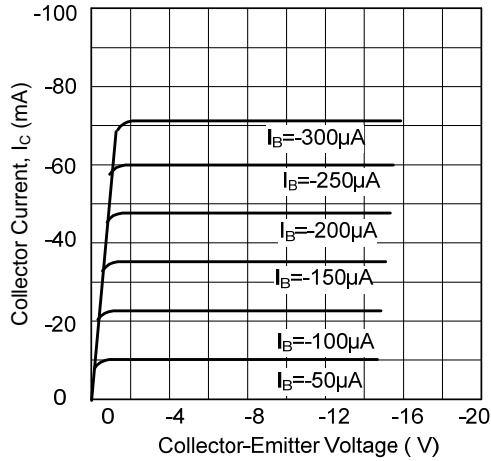


Fig.2 DC Current Gain

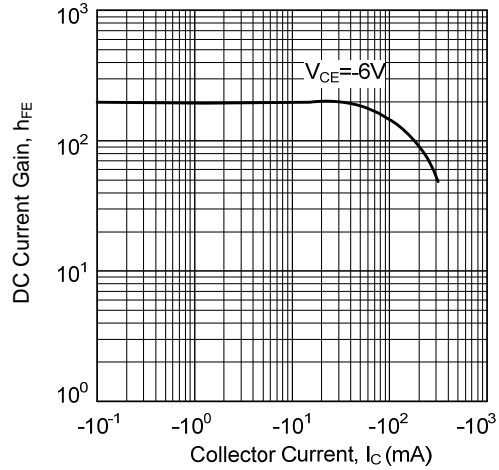


Fig.3 Base-Emitter on Voltage

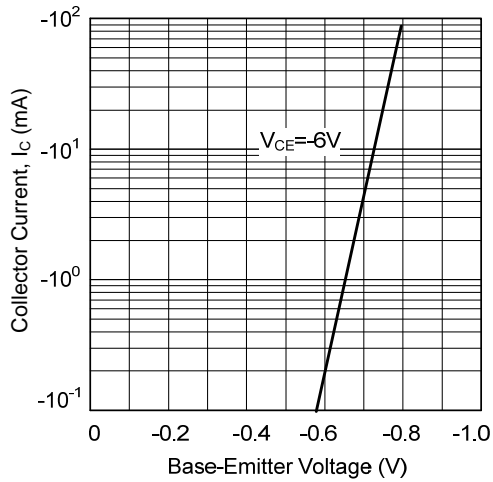


Fig.4 Saturation Voltage

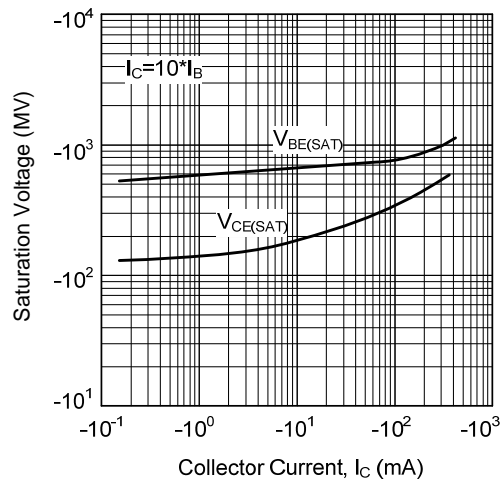


Fig.5 Current Gain-Bandwidth Product



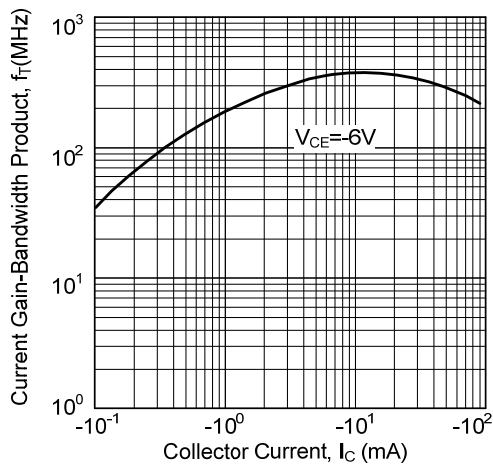


Fig.6 Collector Output Capacitance

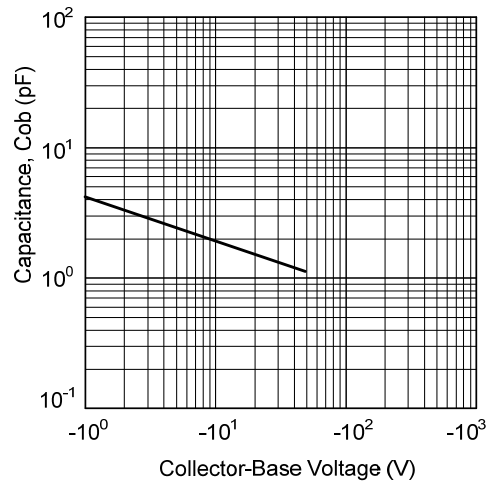

■ TYPICAL CHARACTERISTICS(Cont.)

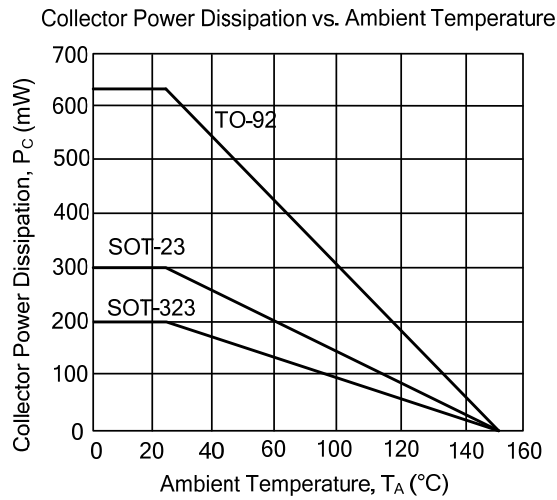

UTC assumes no responsibility for equipment failures that result from using products at values that exceed, even momentarily, rated values (such as maximum ratings, operating condition ranges, or other parameters) listed in products specifications of any and all UTC products described or contained herein. UTC products are not designed for use in life support appliances, devices or systems where malfunction of these products can be reasonably expected to result in personal injury. Reproduction in whole or in part is prohibited without the prior written consent of the copyright owner. The information presented in this document does not form part of any quotation or contract, is believed to be accurate and reliable and may be changed without notice.