
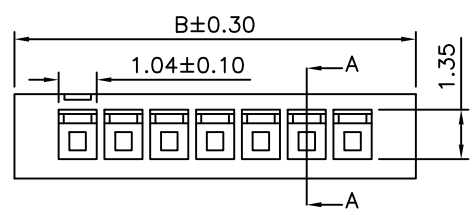
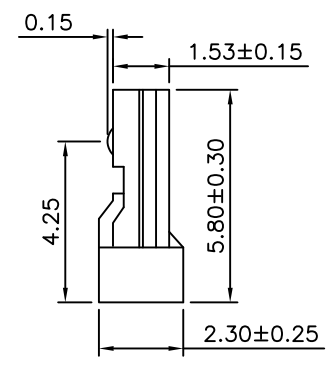
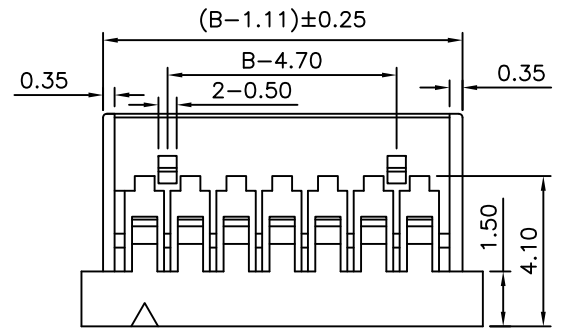
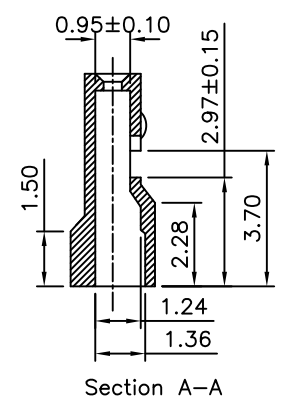


SPECIFICATION

Current Rating:1A AC DC
 Voltage Rating:250V AC DC
 Temperature Range:-25°C~+85°C
 Contact Resistance:20Milliohms Max
 Insulation Resistance:1000Megohms Min
 Withstanding Voltage:500V AC/Minute
 Retetion Force:1000g(Min)/Pin
 Material:PA66 UL94V-0
 Color:Gray

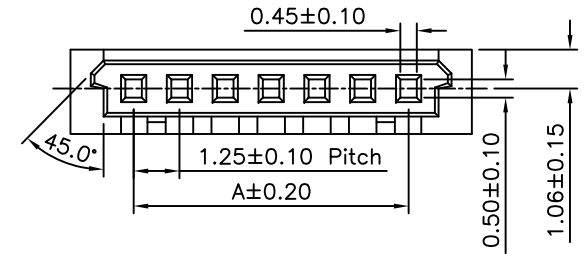

Pin	Dimensions	
	A	B
2	1.25	4.70
3	2.50	5.95
4	3.75	7.20
5	5.00	8.45
6	6.25	9.70
7	7.50	10.95
8	8.75	12.20
9	10.00	13.45
10	11.25	14.70
12	13.75	17.20
14	16.25	19.70
16	18.75	22.20
18	21.25	24.70
20	23.75	27.20
25	30.00	33.45
30	36.25	39.70

AUK A MEMBER OF AUK GROUP
太聯事業股份有限公司
AUK CONTRACTORS CO., LTD.

CATEGORY		APPROVED BY		UNLESS OTHERWISE SPECIFIED					
PART No. DFFXXH		MEI		TOLERANCES ARE					
DRAWING No. DFFXXH		HZF		0~10 ±0.15					
SCALE NONE		JLT		20~30 ±0.30					
REV. BO		JLT		30~ ANG ±0.50					
UNIT mm		BO		±2°					
REV. NO.		BO		NEW RELEASE					
REVISIONS		HZF		12/24/2007					
CHK		DATE							