

- 1N4565A THRU 1N4584A AVAILABLE IN JANC
- ALL JUNCTIONS COMPLETELY PROTECTED WITH SILICON DIOXIDE
- 6.4 VOLT ZENER VOLTAGE $\pm 5\%$
- ELECTRICALLY EQUIVALENT TO 1N4565 THRU 1N4584A
- COMPATIBLE WITH ALL WIRE BONDING AND DIE ATTACH TECHNIQUES

CD4565
thru
CD4584A

MAXIMUM RATINGS

Operating Temperature: -65°C to +175°C
Storage Temperature: -65°C to +175°C

REVERSE LEAKAGE CURRENT


$I_R = 2 \mu A @ 25^\circ C$ & $V_R = 3 V_{dc}$

ELECTRICAL CHARACTERISTICS @ 25°C, unless otherwise specified.

TYPE NUMBER 5.4V $\pm 5\%$	ZENER TEST CURRENT I_{ZT}	EFFECTIVE TEMPERATURE COEFFICIENT	VOLTAGE TEMPERATURE STABILITY $\Delta V_{ZT} \text{ MAX}$ -55 to +100° (Note 2)	TEMPERATURE RANGE	MAXIMUM ZENER IMPEDANCE Z_{ZT} (Note 1)
	mA	%/°C	mV	°C	OHMS
CD4565 CD4565A	.5 .5	.01 .01	48 96	0 to +75°C -55 to +100°C	200 200
CD4566 CD4566A	.5 .5	.005 .005	24 48	0 to +75°C -55 to +100°C	200 200
CD4567 CD4567A	.5 .5	.002 .002	10 19	0 to +75°C -55 to +100°C	200 200
CD4568 CD4568A	.5 .5	.001 .001	5 9	0 to +75°C -55 to +100°C	200 200
CD4569 CD4569A	.5 .5	.0005 .0005	2.5 5	0 to +75°C -55 to +100°C	200 200
CD4570 CD4570A	1.0 1.0	.01 .01	48 96	0 to +75°C -55 to +100°C	100 100
CD4571 CD4571A	1.0 1.0	.005 .005	24 48	0 to +75°C -55 to +100°C	100 100
CD4572 CD4572A	1.0 1.0	.002 .002	10 19	0 to +75°C -55 to +100°C	100 100
CD4573 CD4573A	1.0 1.0	.001 .001	5 9	0 to +75°C -55 to +100°C	100 100
CD4574 CD4574A	1.0 1.0	.0005 .0005	2.5 5	0 to +75°C -55 to +100°C	100 100
CD4575 CD4575A	2.0 2.0	.01 .01	48 96	0 to +75°C -55 to +100°C	50 50
CD4576 CD4576A	2.0 2.0	.005 .005	24 48	0 to +75°C -55 to +100°C	50 50
CD4577 CD4577A	2.0 2.0	.002 .002	10 19	0 to +75°C -55 to +100°C	50 50
CD4578 CD4578A	2.0 2.0	.001 .001	5 9	0 to +75°C -55 to +100°C	50 50
CD4579 CD4579A	2.0 2.0	.0005 .0005	2.5 5	0 to +75°C -55 to +100°C	50 50
CD4580 CD4580A	4.0 4.0	.01 .01	48 96	0 to +75°C -55 to +100°C	25 25
CD4581 CD4581A	4.0 4.0	.005 .005	24 48	0 to +75°C -55 to +100°C	25 25
CD4582 CD4582A	4.0 4.0	.002 .002	10 19	0 to +75°C -55 to +100°C	25 25
CD4583 CD4583A	4.0 4.0	.001 .001	5 9	0 to +75°C -55 to +100°C	25 25
CD4584 CD4584A	4.0 4.0	.0005 .0005	2.5 5	0 to +75°C -55 to +100°C	25 25

NOTE 1 Zener impedance is derived by superimposing on I_{ZT} A 60Hz rms a.c. current equal to 10% of I_{ZT} .

NOTE 2 The maximum allowable change observed over the entire temperature range i.e., the diode voltage will not exceed the specified mV at any discrete temperature between the established limits, per JEDEC standard No.5.

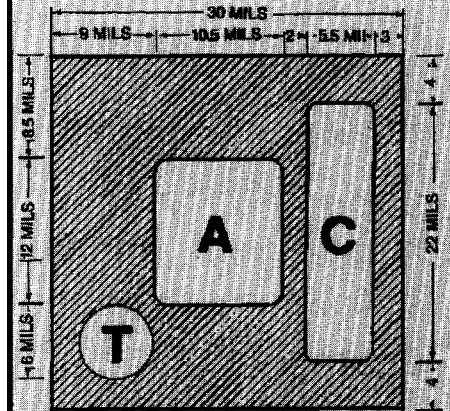

Backside is not cathode and must be electrically isolated.

T = Metallization Test Pad

DESIGN DATA

METALLIZATION:

Top: (Anode).....A1
Back: (Cathode).....Au

AL THICKNESS.....25,000 Å Min

GOLD THICKNESS.....4,000 Å Min

CHIP THICKNESS.....10 Mils

CIRCUIT LAYOUT DATA:

For Zener operation, cathode must be operated positive with respect to anode.

TOLERANCES: ALL

Dimensions ± 2 mils







COMPENSATED DEVICES INCORPORATED



166 TREMONT STREET, MELROSE, MASSACHUSETTS 02176
PHONE (617) 665-1071

FAX (617) 665-7379

CD4565 thru CD4584A

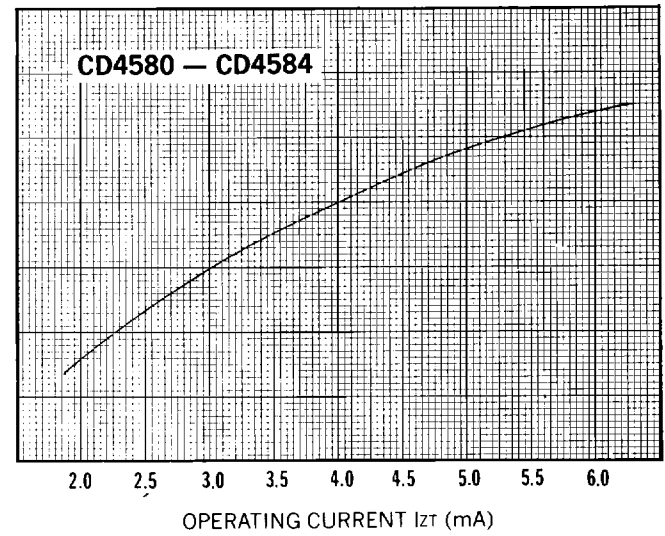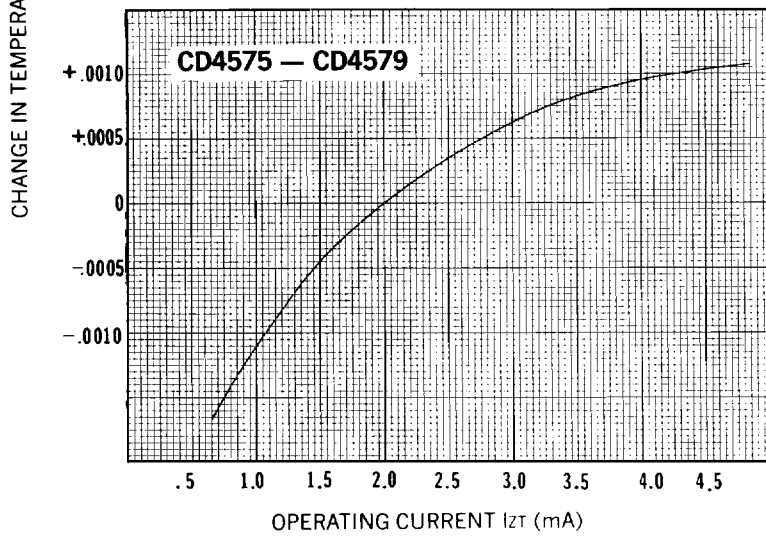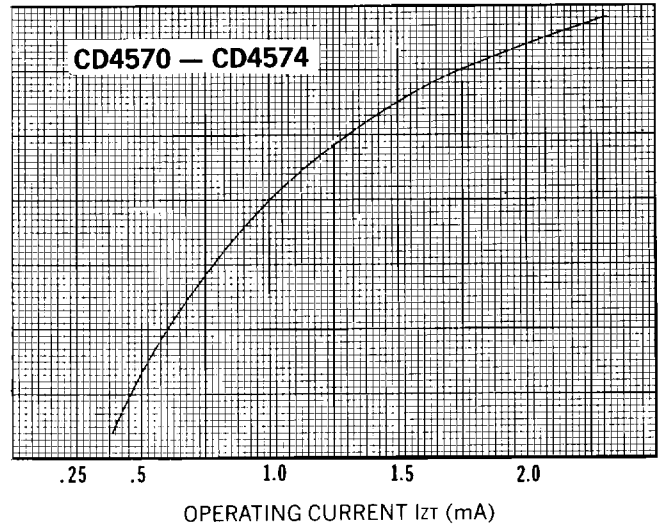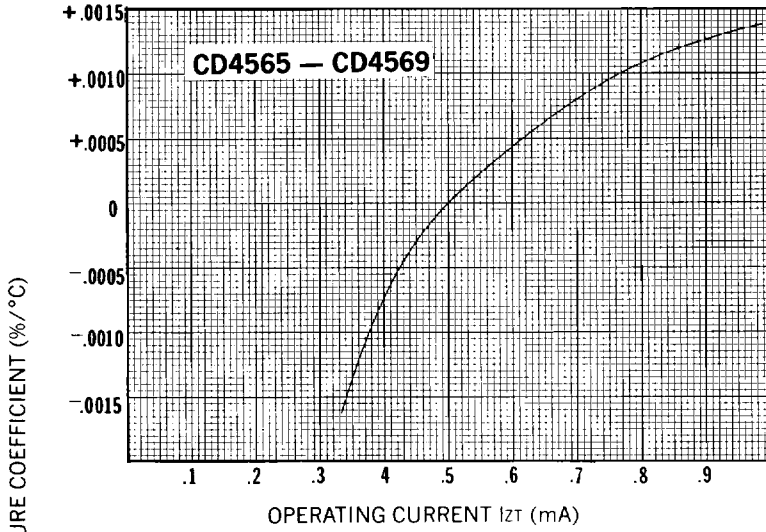

TYPICAL CHANGE OF TEMPERATURE COEFFICIENT WITH CHANGE IN OPERATING CURRENT

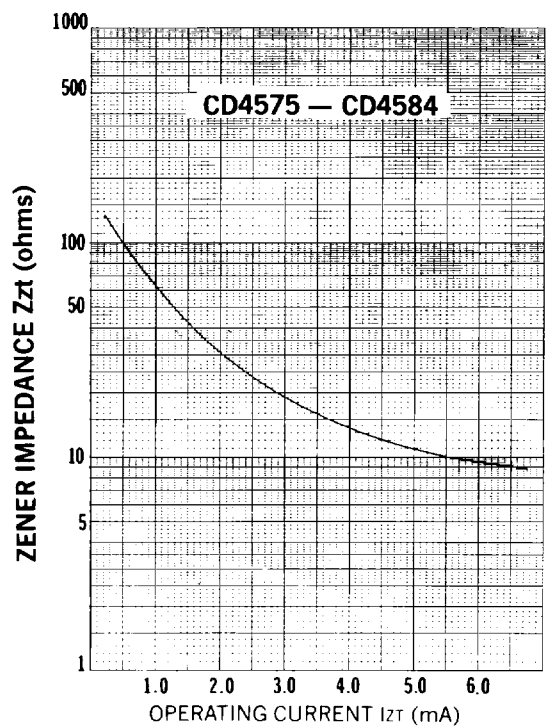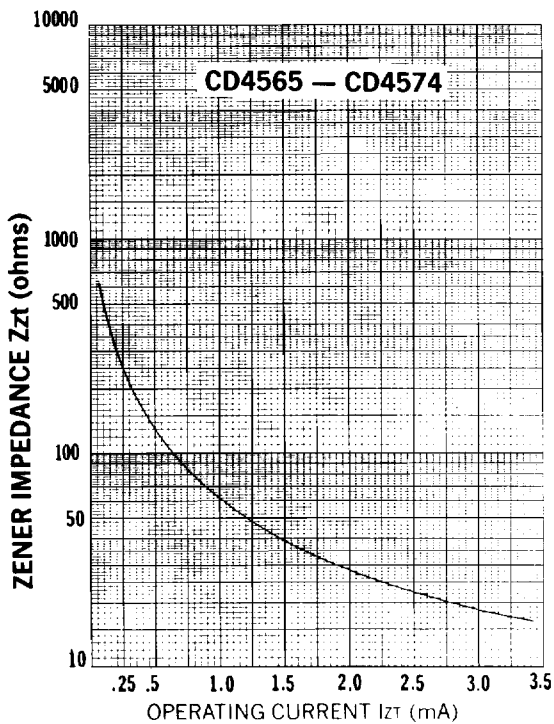

TYPICAL CHANGE OF ZENER IMPEDANCE WITH CHANGE IN OPERATING CURRENT