


5682F Series Dual Mount T-1 LED Assembly

DESCRIPTION AND FEATURES

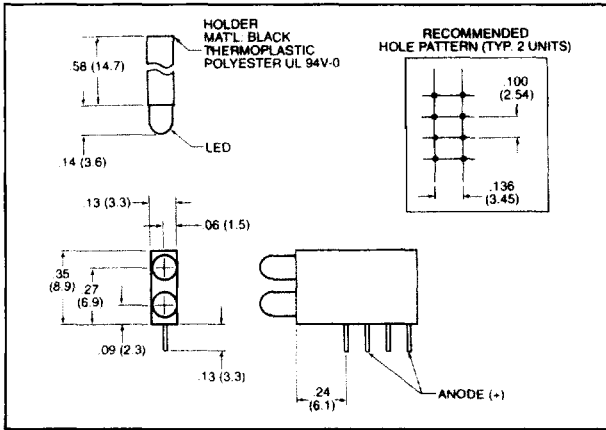

FEATURES

- 2 T-1 LEDs mounted in single block saves space and assembly time
- High density-only 0.13 wide
- Black plastic mounting block for high contrast ratio
- Meets UL 94V-0 and Bellcore flammability specifications

AVAILABLE OPTIONS: Low current, 5 volt and 12 volt built-in resistors, bicolor and blue LEDs also offered. Call factory for ordering information.

ORDERING INFORMATION: Use chart below to determine model number.

	RED	AMBER	GREEN	YELLOW
LED	1	3	5	7

MODEL NO. IS AS FOLLOWS: 5682F _____ ; _____
 TOP LED ; BOTTOM LED

EXAMPLE: To order red LED on top and green LED on bottom. The part number would be: 5682F1;5

ELECTRO-OPTICAL CHARACTERISTICS

Part Number	Emitted Color	Typ. Intensity (mcd)	Rated Current (mA)	Continuous Forward Current-Max. (mA)	Forward Voltage		Reverse Breakdown Voltage Min. (V)	Peak Wavelength (nm)
					Typ. (V)	Max (V)		
5682F1	Red	10.0	10	25	2.2	3.0	5.0	635
5682F3	Amber	6.5	10	25	2.2	3.0	5.0	602
5682F5	Green	8.5	10	25	2.3	3.0	5.0	565
5682F7	Yellow	10.0	10	20	2.2	3.0	5.0	583