

**Series T1250-T1258, T3250-T3258,
T4001-T4009, T4301-T4309**
Extended Temperature/COTS
XO, 5.0V



Features

- 20kHz to 100MHz frequency range
- 5X7 SMD form factor
- Hermetically sealed for rugged environmental conditions
- Extremely wide operating temperature range accommodates harsh environments
- Crystals are processed with tight angle control to assure best frequency-temperature characteristics
- Units are vacuum baked before sealing at 175°C for 16 hours to eliminate moisture traces and pre-age units for superior stability
- Tristate feature optional
- Equivalent 3.3V parts are available in [T7250 series](#)
- Solder coating of outer pads upon request



RoHS Status

RoHS
6/6

Tinned pad parts are
5/6 RoHS compliant

Description

Owing to their small size, light weight, and rugged characteristics, these 5.0V HCMOS extended temperature/COTS oscillators fulfill tasks not previously feasible. They are used in applications that take advantage of their extended temperature range and high performance. Twenty four different models (with and without tristate) cover -55°C to +200°C operation and provide frequency selection from 20kHz to 100MHz. They combine excellent long-term reliability, loading characteristics, and superior startup performance.

Applications

- Applications that require an HCMOS5.0V clock and might be exposed to extremely harsh environmental conditions.

Electrical Specifications

Parameter	Symbol	Condition	Min	Typ	Max	Unit	Note	
Frequency Range	F		0.02		100	MHz		
Frequency Stability	$\Delta F/F$	Overall condition including calibration, temperature voltage and load variation	± 75		± 500	ppm	See Chart	
Operating Temperature	T		-55°		+200°	°C	See Chart	
Aging		First Year After First Year		3 1		ppm ppm/yr	85C	
Supply Voltage	V _{CC}		4.5	5.0	5.5	V		
Supply Current					40	mA		
Output		All units, full range Loads 3 TTL loads, or 10 LSTTL loads, or 15pF CMOS						
Symmetry		TTL and LSTTL @ 1.4V CMOS, @ 50% V _{DD}		40/60 40/60		%		
Rise and Fall Times		TTL and LSTTL from 0.4 to 2.4V CMOS, 15 pF, from 0.4 to (V _{DD} -0.4) V CMOS, 30 pF, from 0.4 to (V _{DD} -0.4) V			8 8 10	ns		
Input requirement for pin.1		Output enable - Output disable (Tristate)	pin 1 may float or 2.8V min pin 1 requires 0.4V max					

**Series T1250-T1258, T3250-T3258,
T4001-T4009, T4301-T4309**
Extended Temperature/COTS
XO, 5.0V




Environmental and Mechanical Conditions

Parameter	Condition
Shock	1000 Gs, 0.35 ms, ½ sine wave, 3 shocks in each plane
Vibration	10-2000 Hz of 0.06" d.a. or 20 Gs, whichever is less
Humidity	Resistant to 85° R.H. at 85°C
Gross Leak	Each unit checked in 125°C fluorocarbon
Fine Leak	Mass spectrometer leak rate less than 2×10^{-8} atm, cc/sec of helium
Case	Hermetically sealed ceramic LCC
Pads*	40 microinch of gold over nickel or tinned (solder coated)
Marking	Epoxy ink or laser engraved
Resistance to Solvents	MIL STD 202, Method 215

*Tinned by Hot dip solder in accordance with MIL-M38510 (63/37 Sn/Pb). Tinning of parts with operation temperature 175C and above are excluded.

FIXED OUTPUT	TRISTATE	Frequency Stability	Operating Temperature
Model	Model		
T1250	T3250	±75ppm	-40° to +85°C
T1254	T3254	±100 ppm	0° to +175°C
T1256	T3256	±75 ppm	-55° to +85°C
T1258	T3258	±100 ppm	-40° to +85°C
T4001	T4301	±500 ppm	-55° to +200°C
T4002	T4302	±500 ppm	0° to 200°C
T4003	T4303	±250 ppm	-55° to +200°C
T4004	T4304	±250 ppm	0° to +200°C
T4005	T4305	±250 ppm	-55° to +175°C
T4006	T4306	±250 ppm	0° to +175°C
T4007	T4307	±150 ppm	-55° to +175°C
T4008	T4308	±150 ppm	0° to +175°C
T4009	T4309	±100 ppm	-55° to +125°C
T4010	T4310	±50 ppm	-55° to +85°C
T4011	T4311	±25 ppm	-55° to +85°C
T4012	T4312	±75 ppm	-55° to +125°C
T4013	T4313	±50 ppm	-55° to +125°C

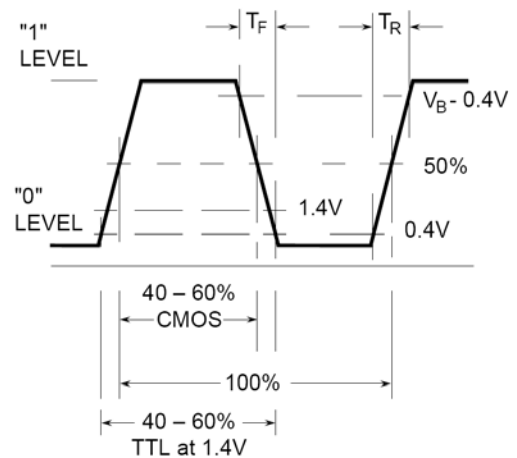


Waveforms

**Series T1250-T1258, T3250-T3258,
T4001-T4009, T4301-T4309**
Extended Temperature/COTS
XO, 5.0V



Pin Assignments


Pin	Non-Tristate Models	Tristate Models
1	NOT USED	Floating or 1 : Oscillator runs Ground or 0 : Disable or Tristate
2	Ground and Case	
3	Output	
4	+5.0V, V _{DD}	



SUGGESTED PC PADS

Millimeters are shown in ().

Package Outline

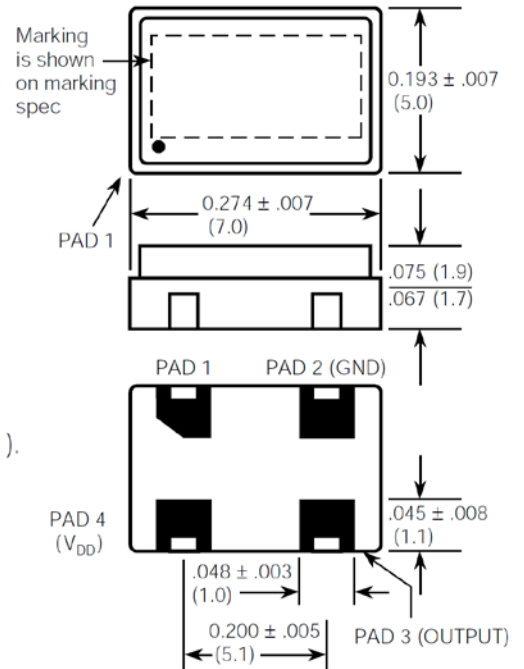

How to Order




“T” is SMD (gold pads) T package


“1250” is model type

“ ” is none
“TL” is tinned pads*
*5/6 RoHs compliant

Marking Specification

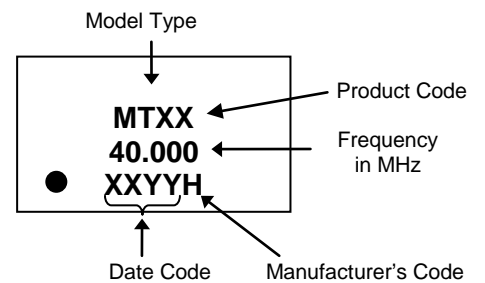

Series T1250-T1258, T3250-T3258,
T4001-T4009, T4301-T4309
Extended Temperature/COTS
XO, 5.0V

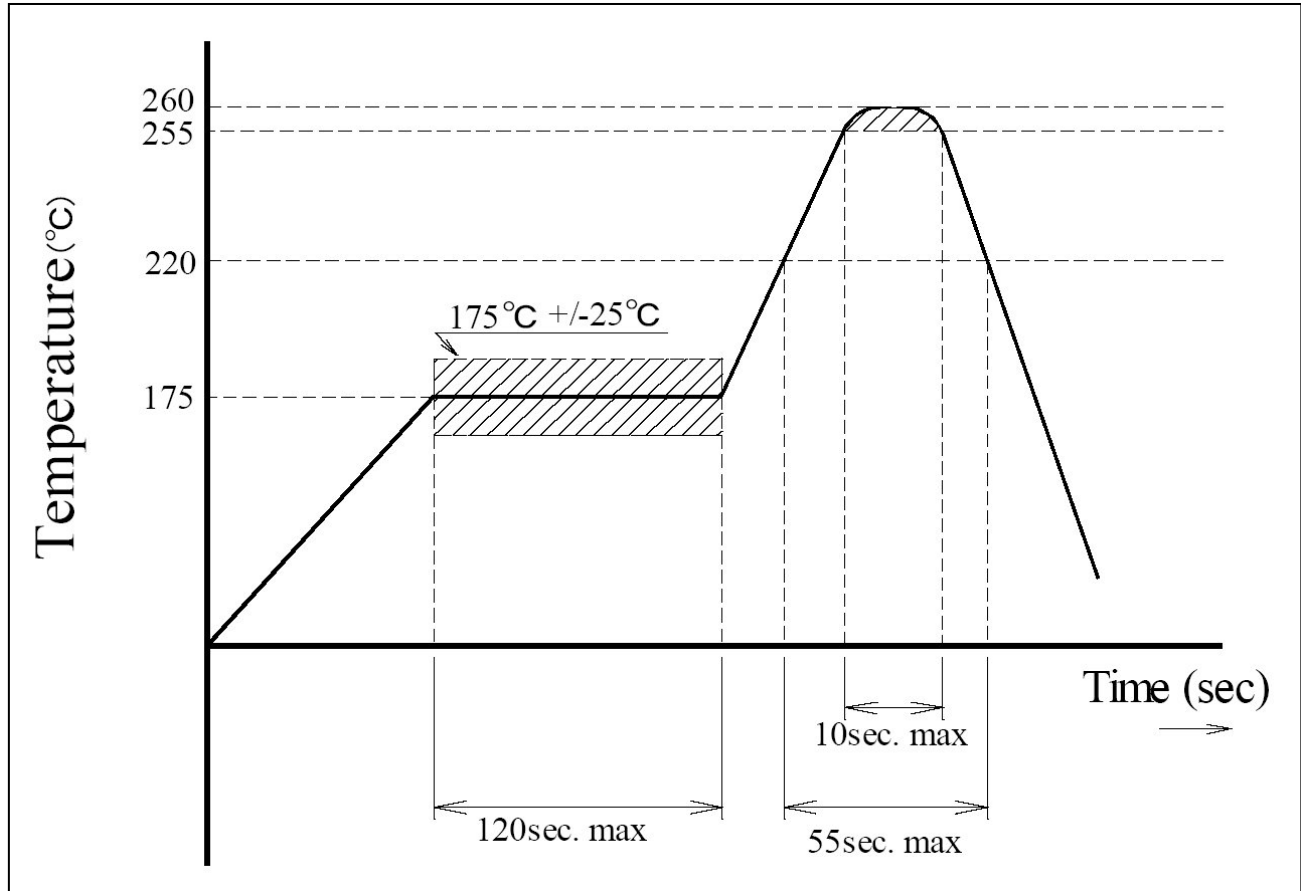

Recommended Reflow Soldering Profile

**Series T1250-T1258, T3250-T3258,
T4001-T4009, T4301-T4309
Extended Temperature/COTS
XO, 5.0V**



TABLE 2
Reliability Test Procedures and Conditions for Quartz Crystal Oscillators

1. Group A

Electrical Characteristics at 25°C

- Frequency at nominal supply voltage and endpoints
- Input current
- Symmetry (Duty Cycle)
- Zero/One levels
- Rise/Fall times
- Frequency (verify frequency at the temperature extremes)

Physical Dimensions

- Length/width
- Height
- Package finish (Corrosion, discoloration, etc.)
- Marking placement/legibility

2. Group B

1000 hrs at or above 125°C, nominal voltage, proper load (sample size by MIL -PRF-55310 table 6, max. aging within 15 years requirement without catastrophic failures)

3. Group C- All units have passed Group A testing

A. Subgroup 1: 8 pcs.

<u>Standard</u>	<u>Condition</u>	<u>Description</u>	<u>End Point Measurement</u>
MIL-STD-883	Method 2002 COND.B	Mechanical Shock 1500 g's, 0.5ms 5 drops, 6 axis	Frequency Output waveform
MIL-STD-883	Method 2007 COND. A	Vibration, var. freq. 20 g's, 0.06" disp., 20- 20, 000-20 Hz	Frequency Output waveform
MIL-STD-883	Method 2003	Solderability	Visual 95% Coverage

B. Subgroup 2: 4 pcs (One-half of Subgroup 1)

<u>Standard</u>	<u>Condition</u>	<u>Description</u>	<u>End point Measurement</u>
MIL-STD-883	Method 1011 COND. B	Thermal Shock Liq. To liq. 15 cycles	Frequency Output waveform
MIL-STD-202	Method 105 COND. B	Altitude, 3.44 inch Hg. 12 hrs	Frequency Output waveform
MIL-STD-883	Method 1004	Moisture resist. with supply voltage applied 25°C to 65°C, 90 to 100% RH, 10 cycles	Frequency Output waveform
MIL-STD-202	Method 210 COND. A	Resistance to Solder Heat Immersion @350°C 3.5 sec	Frequency Output waveform

C. Subgroups 3: 4 pcs. (One half of Subgroup 1)

<u>Standard</u>	<u>Condition</u>	<u>Description</u>	<u>End point Measurement</u>
	Storage Temp. No. Oper	24 hrs. @ -55°C 24 hrs. @ 125°C	Frequency Output waveform
MIL-STD-883	Method 1009 COND. A	Salt Atmosphere 24 hrs. @ 35°C 0.5-3.0% Solution	Frequency Output waveform Visual
MIL-STD-883	Method 1014 COND. A	Fine Leak	Qs <5 X10 ⁻⁸
MIL-STD-883	Method 1014 COND. C	Gross Leak	Visual in 125°C Detector fluid

Test data is available for additional cost.