

OCXO-131A

Oven Controlled Crystal Oscillator

■Features

- High stability.
- Fast warm up.

■Typical Applications

- Standard Oscillator.

■Standard Frequencies


- 5MHz.

*Please do not clean using any kind of liquid cleansing method.

■Specifications

Item	Type	OCXO-131A	OCXO-131A1
Frequency		5MHz	
Operating Temperature Range		0~+50°C	-10~+60°C
Storage Temperature Range		-20~+80°C	
Frequency Temperature Characteristics		$\pm 5 \times 10^{-10}$ MAX./0~+50°C	$\pm 1 \times 10^{-9}$ MAX./-10~+60°C
Frequency Aging		$\pm 1 \times 10^{-10}$ MAX./day $\pm 1 \times 10^{-8}$ MAX./year	$\pm 2 \times 10^{-10}$ MAX./day $\pm 2 \times 10^{-8}$ MAX./year
Supply Voltage Change		$\pm 2 \times 10^{-10}$ MAX./+15V \pm 5%	$\pm 5 \times 10^{-10}$ MAX./+15V \pm 5%
Frequency deviation		$\pm 3 \times 10^{-7}$ MIN./ (VS. internal trimer)	
Power Supply Voltage		+15V \pm 5%	
Power Supply Current		670mA MAX.	
Output	Level	H-CMOS compatible	
	Load	25pF	
	Output Symmetry	45~55% (at +2.5V point)	

■Outline

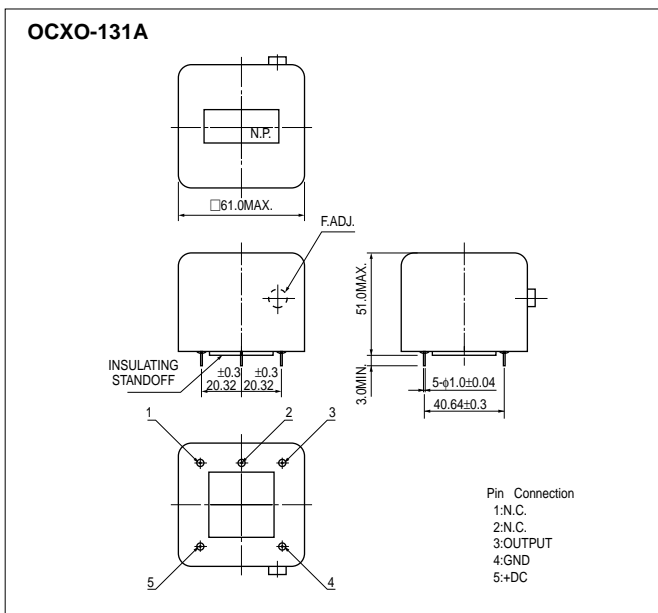

Dimensions(mm)

