


TIN LEAD PART NUMBER

SHELL	A±0.38	B±0.12	C±0.10	D±0.25	E±0.07	PART NUMBER		
09	30.81	24.99	16.96	16.79	10.96	D09P24B4P*00	D09P24B5P*00	D09P24B6P*00
15	39.14	33.32	25.18	25.12	19.18	D15P24B4P*00	D15P24B5P*00	D15P24B6P*00
25	53.03	47.04	39.12	38.84	33.12	D25P24B4P*00	D25P24B5P*00	D25P24B6P*00
37	69.32	63.50	55.68	55.30	49.68	D37P24B4P*00	D37P24B5P*00	D37P24B6P*00
						Gold flash	0,40 µ gold	0,76 µ gold

LEAD FREE PART NUMBER

SHELL	A±0.38	B±0.12	C±0.10	D±0.25	E±0.07	PART NUMBER		
09	30.81	24.99	16.96	16.79	10.96	D09P24B4P*00LF	D09P24B5P*00LF	D09P24B6P*00LF
15	39.14	33.32	25.18	25.12	19.18	D15P24B4P*00LF	D15P24B5P*00LF	D15P24B6P*00LF
25	53.03	47.04	39.12	38.84	33.12	D25P24B4P*00LF	D25P24B5P*00LF	D25P24B6P*00LF
37	69.32	63.50	55.68	55.30	49.68	D37P24B4P*00LF	D37P24B5P*00LF	D37P24B6P*00LF
						Gold flash	0,40 µ gold	0,76 µ gold

PC card drilling dimensions(after plating)
(thickness 2.40±0.20mm)

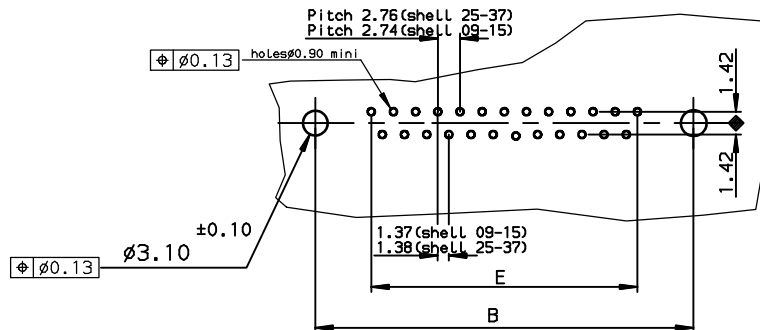

GENERAL CHARACTERISTICS AND ROHS INFORMATIONS:

SEE DRAWING C01-8646-0000

European Views

www.fciconnect.com		surface ISO 1302	<input checked="" type="checkbox"/>	tolerance std ISO 406 ISO 1101	projection 	mm
		TOLERANCES UNLESS OTHERWISE SPECIFIED				
Dr	LELEON	1992/09/14	ANGULAR	LINEAR	size A3	Scale 2
Eng	PESSON	1992/09/14	0.xx	±0.1		
Chr	LEGARE	1992/09/14	0.xxx	±0.1		
Appr	LEGARE	1992/09/14	Product family		ECN	LS06-0095
				D-SUB	Spec ref -	

rev	ecn no	dr	date
D	-	ATC	2000/12/15
E	LS05-001	MPE	2005/03/09
F	LS06-0095	LGO	2006/06/19
-	-	-	-
-	-	-	-
-	-	-	-
-	-	-	-

	title	MALE CONNECTOR DELTA D STD EUROPE	2 30	Rev. F
	catalog no	-		
		straight, solder type for PCB 2.4mm	C01-8646-0103	
			CUSTOMER sheet 1 of 1	



Copyright FCI.