
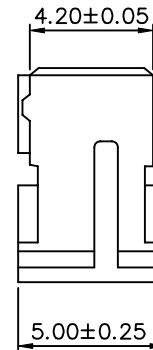
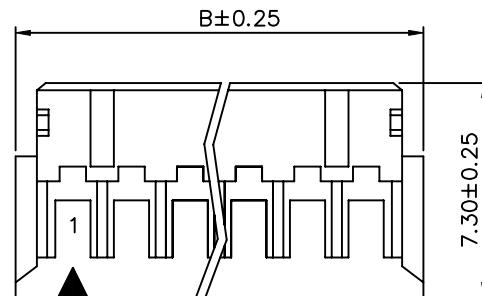


SPECIFICATION

Current Rating: 1A AC,DC
 Voltage Rating: 100V AC,DC
 Temperature Range: -25°C ~ +85°C
 Contact Resistance: 20 Milliohms Max.
 Insulation Resistance: 1000 Megaohms Min.
 Withstanding Voltage: 800V AC/Minute
 Pin Material: Brass/Tin-Plated
 Material: PA66,UL 94V-2
 RoHS Compliant

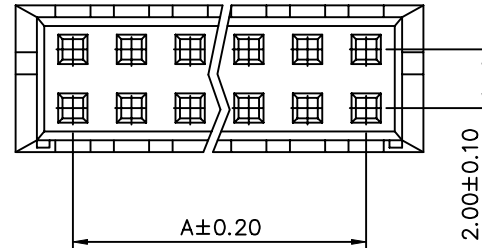

Poles	Dim.A	Dim.B
6	4.00	8.00
8	6.00	10.00
10	8.00	12.00
12	10.00	14.00
14	12.00	16.00
16	14.00	18.00
18	16.00	20.00
20	18.00	22.00
22	20.00	24.00
24	22.00	26.00
26	24.00	28.00
28	26.00	30.00
30	28.00	32.00
32	30.00	34.00
34	32.00	36.00

AUK A MEMBER OF AUK GROUP
太聯事業股份有限公司
AUK CONTRACTORS CO., LTD.

CATEGORY		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE .X ±0.38 .XX ±0.25 ANG.						
PART No. PHDXXH-H		MEI								
DRAWING No. PHDXXH-H		CHECKED BY BECKY								
		DRAWING BY TCF								
SCALE	NONE	REV.	A0	UNIT mm						
							A0	NEW RELEASE	BECKY	2004/10/07
						NO. REV.	REVISIONS		CHK	DATE