

**PART NUMBERING GUIDE**

**Environmental/Mechanical Specifications on page F5**

<b>OAC 100 48 A T - 14.000MHz</b>	
<b>Package</b> OAC = 14 Pin Dip / 5.0Vdc / HCMOS-TTL OBC = 8 Pin Dip / 5.0Vdc / HCMOS-TTL	<b>Pin One Connection</b> Blank = No Connect, T = Tri State Enable High
<b>Inclusive Stability</b> 100= +/-100ppm, 50= +/-50ppm, 30= +/-30ppm, 25= +/-25ppm, 20= +/-20ppm, 15= +/-15ppm, 10= ±10ppm	<b>Output Symmetry</b> Blank = 40/60%, A = 45/55%
	<b>Operating Temperature Range</b> Blank = 0°C to 70°C, 27 = -20°C to 70°C, 48 = -40°C to 85°C


**ELECTRICAL SPECIFICATIONS**

Revision: 1997-A

<b>Frequency Range</b>	3.579545MHz to 14.31818MHz	
<b>Operating Temperature Range</b>	0°C to 70°C / -40°C to 85°C	
<b>Storage Temperature Range</b>	-55°C to 125°C	
<b>Supply Voltage</b>	5.0Vdc ±10%, 3.3Vdc ±10%	
<b>Input Current</b>	3.579545MHz to 5.000MHz 5.001MHz to 9.000MHz 9.001MHz to 14.31818MHz	1mA Maximum 1.5mA Maximum 2.0mA Maximum
<b>Frequency Tolerance / Stability</b>	Inclusive of Operating Temperature Range, Supply Voltage and Load	±100ppm, ±50ppm, ±30ppm, ±25ppm, ±20ppm, ±15ppm or ±10ppm (20, 15, 10 = 0°C to 70°C Only)
<b>Output Voltage Logic High (Voh)</b>	w/TTL Load w/HCMOS Load	2.4Vdc Minimum Vdd -0.5Vdc Minimum
<b>Output Voltage Logic Low (Vol)</b>	w/TTL Load w/HCMOS Load	0.4Vdc Maximum 0.5Vdc Maximum
<b>Rise Time / Fall Time</b>	0.4Vdc to 2.4Vdc w/TTL Load; 20% to 80%	15nSeconds Maximum
<b>Duty Cycle</b>	@1.4Vdc w/TTL Load; @50% w/HCMOS Load @1.4Vdc w/TTL Load or w/HCMOS Load	50 ±10% (Standard) 50±5% (Optional)
<b>Load Drive Capability</b>	15pF CMOS Load Maximum	
<b>Pin 1 Tristate Input Voltage</b>	No Connection V <sub>IH</sub> V <sub>IL</sub>	Enables Output +2.2Vdc Minimum to Enable Output +0.8Vdc Maximum to Disable Output
<b>Aging (@ 25°C)</b>	±5ppm / year Maximum	
<b>Start Up Time</b>	10mSeconds Maximum	
<b>Absolute Clock Jitter</b>	±100pSeconds Maximum	
<b>One Sigma Clock Jitter</b>	±25pSeconds Maximum	

**MECHANICAL DIMENSIONS**

Marking Guide on page F3-F4

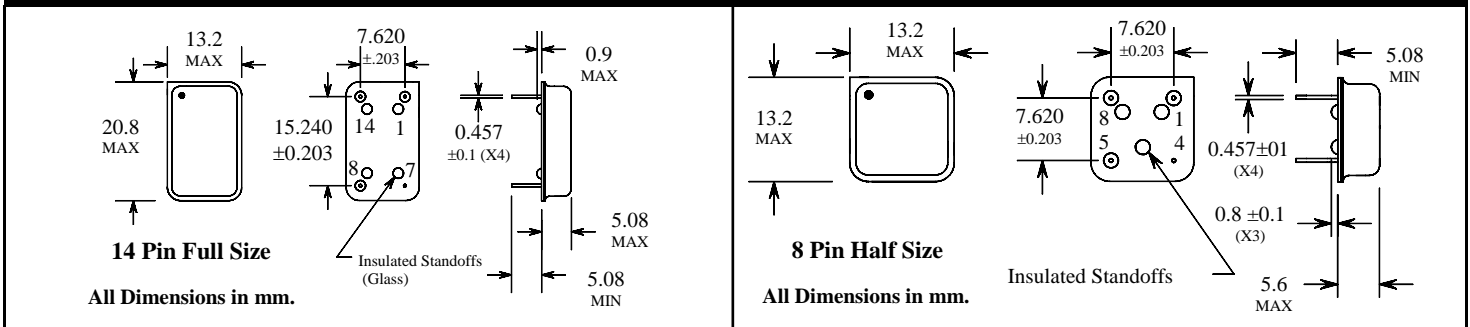

Pin 1: No Connect or Tri-State Pin 7: Case Ground	Pin 8: Output Pin 14: Supply Voltage	Pin 1: No Connect or Tri-State Pin 4: Case Ground	Pin 5: Output Pin 8: Supply Voltage
--	---	--	--