


**SURFACE MOUNTABLE
PHASE CONTROL SCR**

Description/Features

The 10TTS08S **SAFEIR** series of silicon controlled rectifiers are specifically designed for medium power switching and phase control applications. The glass passivation technology used has reliable operation up to 125° C junction temperature.

Typical applications are in input rectification (soft start) and these products are designed to be used with International Rectifier input diodes, switches and output rectifiers which are available in identical package outlines.

	$V_T < 1.15V @ 6.5A$ $I_{TSM} = 140A$ $V_{RRM} = 800V$
---	--

Output Current in Typical Applications


Applications	Single-phase Bridge	Three-phase Bridge	Units
NEMA FR-4 or G10 glass fabric-based epoxy with 4 oz (140µm) copper	2.5	3.5	A
Aluminum IMS, $R_{thCA} = 15^\circ C/W$	6.3	9.5	
Aluminum IMS with heatsink, $R_{thCA} = 5^\circ C/W$	14.0	18.5	

$T_A = 55^\circ C, T_J = 125^\circ C, \text{footprint } 300\text{mm}^2$

Major Ratings and Characteristics

Characteristics	10TTS08S	Units
$I_{T(AV)}$ Sinusoidal waveform	6.5	A
I_{RMS}	10	A
V_{RRM}/V_{DRM}	800	V
I_{TSM}	140	A
$V_T @ 6.5 A, T_J = 25^\circ C$	1.15	V
dv/dt	150	V/µs
di/dt	100	A/µs
T_J range	-40 to 125	°C

Package Outline



D² PAK (SMD-220)

10TTS08S *SAFEIR* Series

Preliminary Data Sheet I2145 12/97

International
IOR Rectifier

Voltage Ratings

Part Number	V_{RRM} , maximum peak reverse voltage V	V_{DRM} , maximum peak direct voltage V	I_{RRM}/I_{DRM} 125°C mA
10TTS08S	800	800	1.0

Absolute Maximum Ratings

Parameters	10TTS08S	Units	Conditions
$I_{T(AV)}$ Max. Average On-state Current	6.5	A	@ $T_C = 112^\circ\text{C}$, 180° conduction half sine wave
$I_{T(RMS)}$ Max. RMS On-state Current	10		
I_{TSM} Max. Peak One Cycle Non-Repetitive Surge Current	120	A	10ms Sine pulse, rated V_{RRM} applied, $T_J = 125^\circ\text{C}$
	140		10ms Sine pulse, no voltage reapplied, $T_J = 125^\circ\text{C}$
I^2t Max. I^2t for fusing	72	A^2s	10ms Sine pulse, rated V_{RRM} applied, $T_J = 125^\circ\text{C}$
	100		10ms Sine pulse, no voltage reapplied, $T_J = 125^\circ\text{C}$
$I^2\sqrt{t}$ Max. $I^2\sqrt{t}$ for fusing	1000	$\text{A}^2\sqrt{\text{s}}$	$t = 0.1$ to 10ms, no voltage reapplied, $T_J = 125^\circ\text{C}$
V_{TM} Max. On-state Voltage Drop	1.15	V	@ 6.5A, $T_J = 25^\circ\text{C}$
r_t On-state slope resistance	17.3	$\text{m}\Omega$	$T_J = 125^\circ\text{C}$
$V_{T(TO)}$ Threshold Voltage	0.85	V	
I_{RM}/I_{DM} Max. Reverse and Direct Leakage Current	0.05	mA	$T_J = 25^\circ\text{C}$
	1.0		$T_J = 125^\circ\text{C}$
I_H Typ. Holding Current	30	mA	Anode Supply = 6V, Resistive load, Initial $I_T = 1\text{A}$
I_L Max. Latching Current	50	mA	Anode Supply = 6V, Resistive load
dv/dt Max. rate of rise of off-state Voltage	150	$\text{V}/\mu\text{s}$	$T_J = 25^\circ\text{C}$
di/dt Max. rate of rise of turn-on Current	100	$\text{A}/\mu\text{s}$	

Triggering

Parameters	10TTS08S	Units	Conditions
P_{GM} Max. peak Gate Power	8.0	W	
$P_{G(AV)}$ Max. average Gate Power	2.0		
$+I_{GM}$ Max. peak positive Gate Current	1.5	A	
$-V_{GM}$ Max. peak negative Gate Voltage	10	V	
I_{GT} Max. required DC Gate Current to trigger	20	mA	Anode supply = 6V, resistive load, $T_J = -65^\circ\text{C}$
	15		Anode supply = 6V, resistive load, $T_J = 25^\circ\text{C}$
	10		Anode supply = 6V, resistive load, $T_J = 125^\circ\text{C}$
V_{GT} Max. required DC Gate Voltage to trigger	1.2	V	Anode supply = 6V, resistive load, $T_J = -65^\circ\text{C}$
	1		Anode supply = 6V, resistive load, $T_J = 25^\circ\text{C}$
	0.7		Anode supply = 6V, resistive load, $T_J = 125^\circ\text{C}$
V_{GD} Max. DC Gate Voltage not to trigger	0.2		$T_J = 125^\circ\text{C}$, $V_{DRM} = \text{rated value}$
I_{GD} Max. DC Gate Current not to trigger	0.1	mA	$T_J = 125^\circ\text{C}$, $V_{DRM} = \text{rated value}$

Switching

Parameters	10TTS08S	Units	Conditions
t_{gt} Typical turn-on time	0.8	μs	$T_J = 25^\circ\text{C}$
t_{rr} Typical reverse recovery time	3		$T_J = 125^\circ\text{C}$
t_q Typical turn-off time	100		

Thermal-Mechanical Specifications

Parameters	10TTS08S	Units	Conditions
T_J Max. Junction Temperature Range	-40 to 125	$^\circ\text{C}$	
T_{stg} Max. Storage Temperature Range	-40 to 125	$^\circ\text{C}$	
	Soldering Temperature	240	$^\circ\text{C}$ for 10 seconds (1.6mm from case)
R_{thJC} Max. Thermal Resistance Junction to Case	1.5	$^\circ\text{C}/\text{W}$	DC operation
R_{thJA} Typ. Thermal Resistance Junction to Ambient (PCB Mount)**	40	$^\circ\text{C}/\text{W}$	
wt Approximate Weight	2(0.07)	g(oz.)	
T Case Style	D ² Pak(SMD-220)		

**When mounted on 1" square (650mm²) PCB of FR-4 or G-10 material 4oz (140 μm) copper 40 $^\circ\text{C}/\text{W}$
 For recommended footprint and soldering techniques refer to application note #AN-994

10TTS08S SAFEIR Series

Preliminary Data Sheet I2145 12/97

International
IOR Rectifier

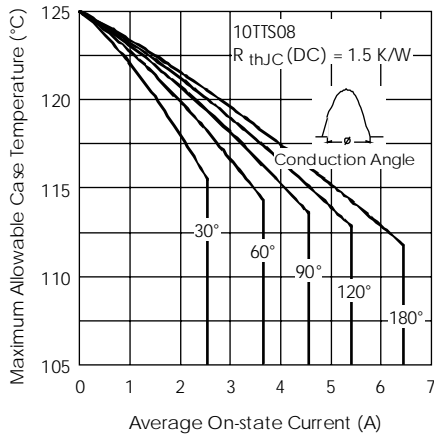


Fig. 1 - Current Rating Characteristics

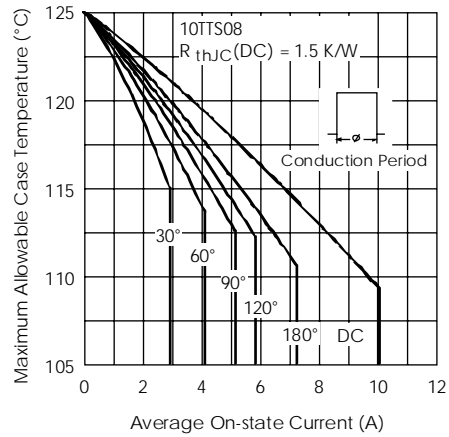


Fig. 2 - Current Rating Characteristics

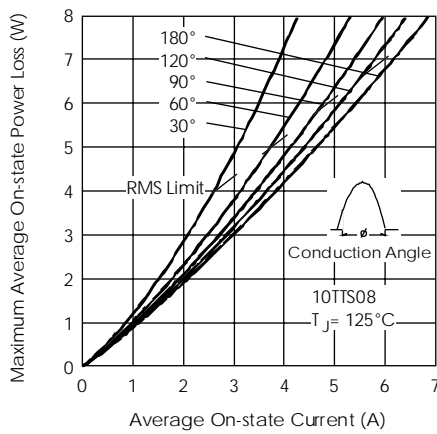


Fig. 3 - On-state Power Loss Characteristics

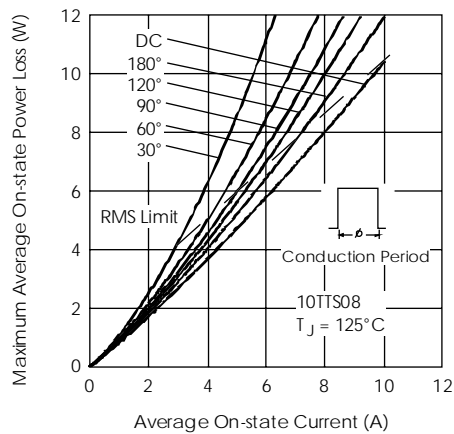


Fig. 4 - On-state Power Loss Characteristics

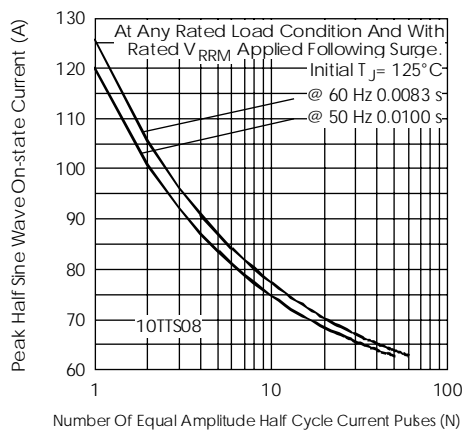


Fig. 6 - Maximum Non-Repetitive Surge Current

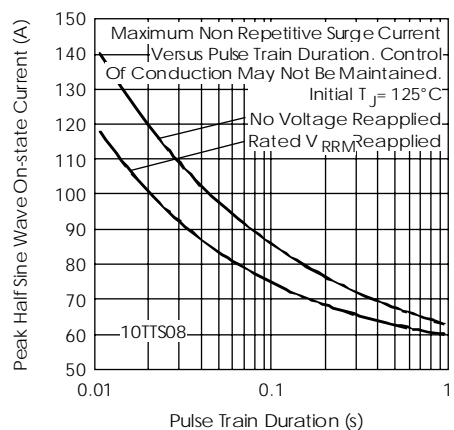


Fig. 7 - Maximum Non-Repetitive Surge Current

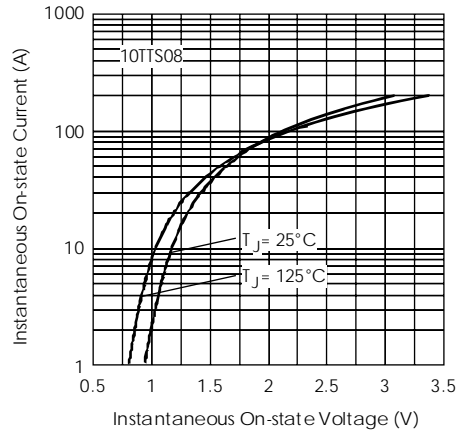


Fig. 7 - On-state Voltage Drop Characteristics

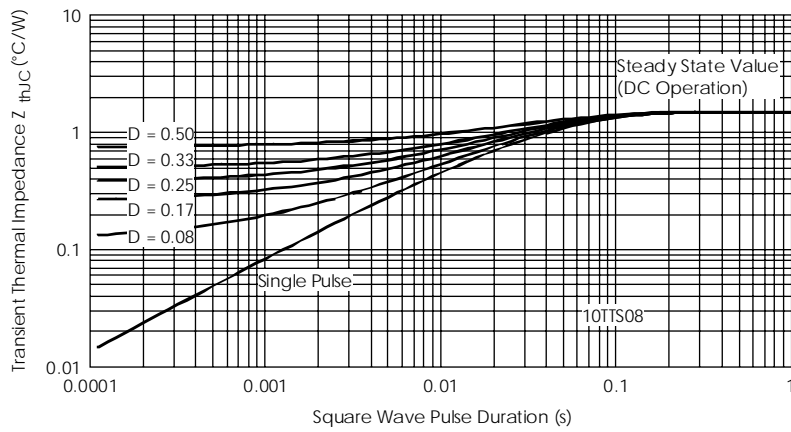



Fig. 8 - Thermal Impedance Z_{thjC} Characteristics

10TTS08S *SAFEIR* Series


Preliminary Data Sheet I2145 12/97

International
IOR Rectifier


Marking Information

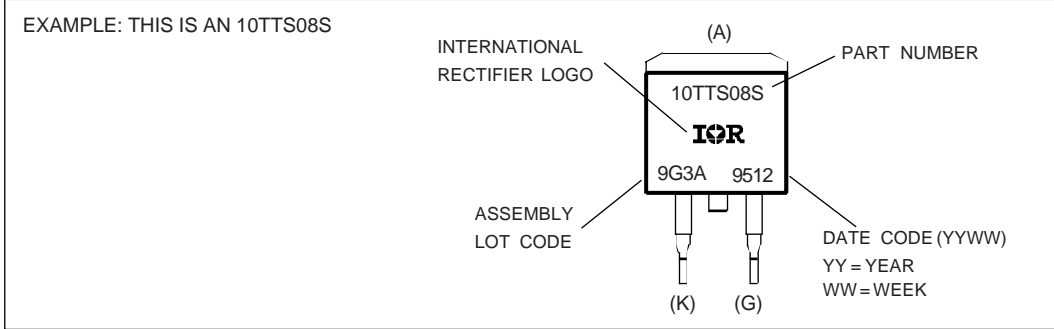


Tape & Reel Information

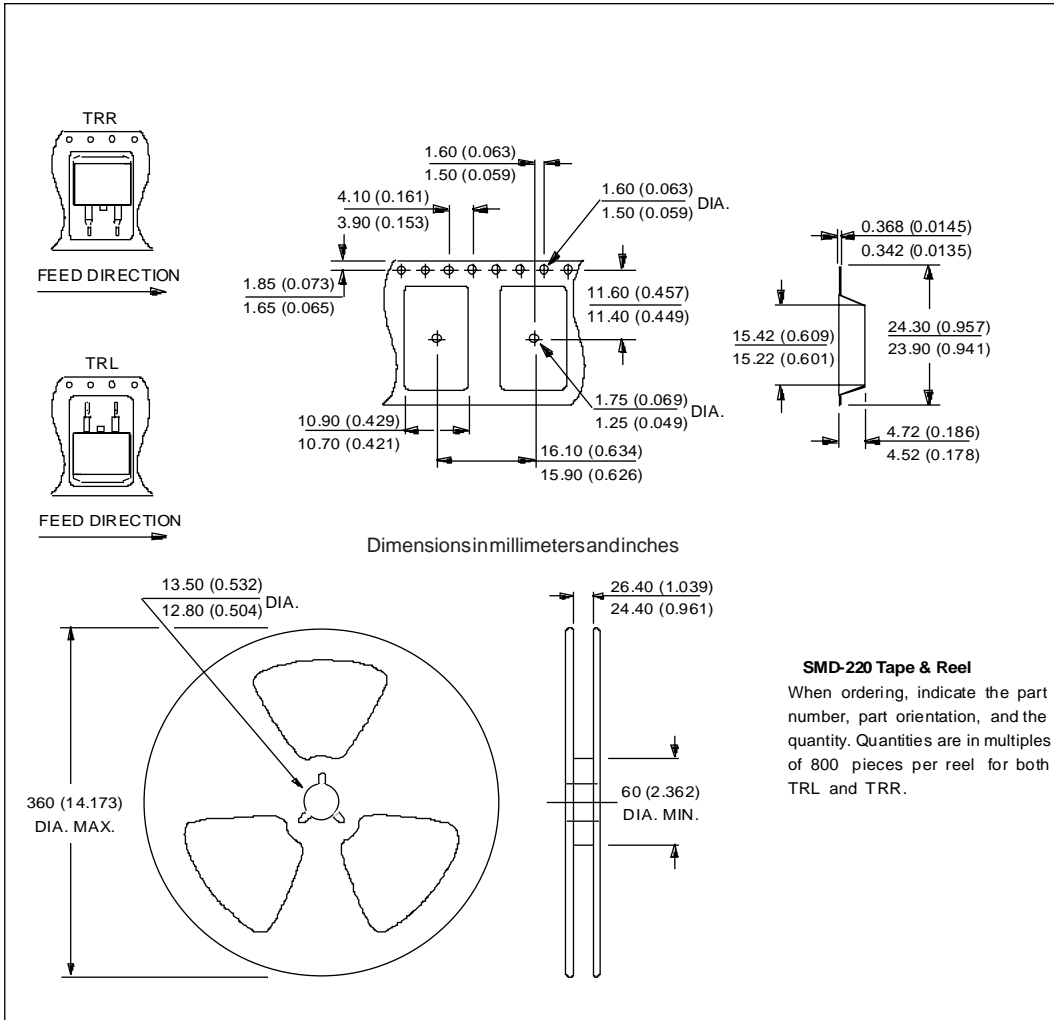

Outline Table

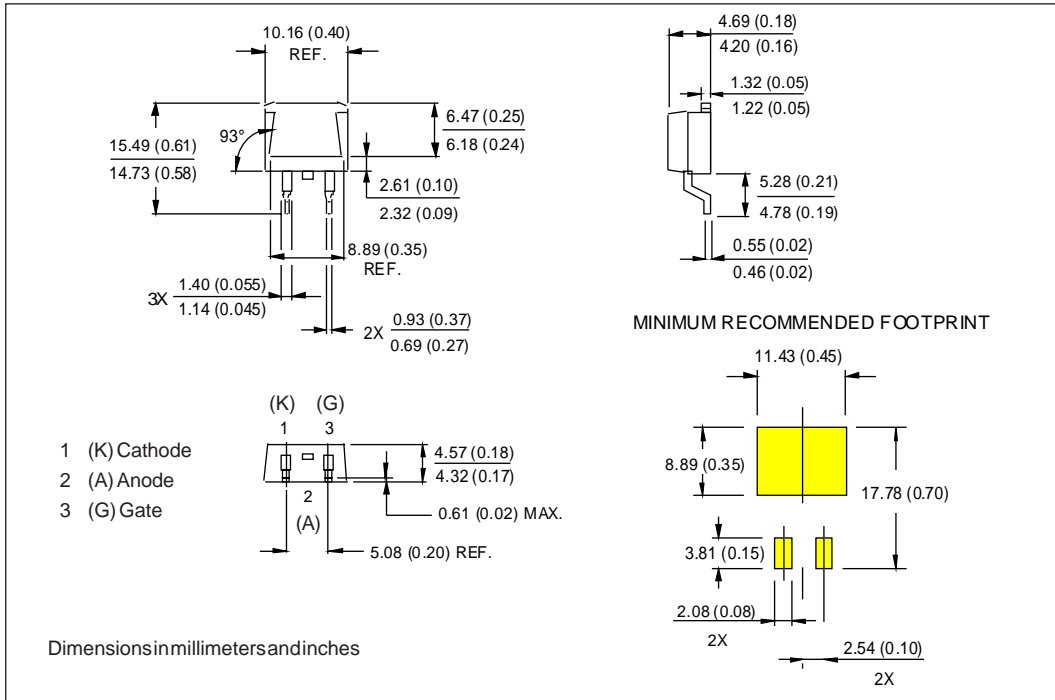

Ordering Information Table

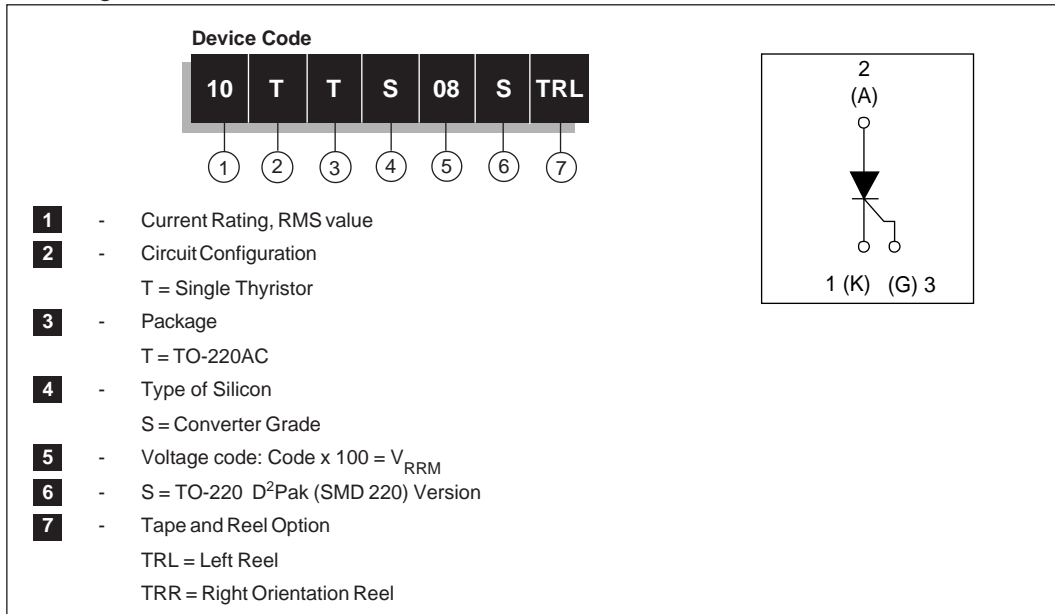

10TTS08S *SAFEIR* Series

Preliminary Data Sheet I2145 12/97

International
IOR Rectifier

International
IOR Rectifier

WORLDHEADQUARTERS: 233 Kansas St., El Segundo, California 90245 U.S.A Tel: (310) 322-3331 Fax: (310) 322-3332
EUROPEANHEADQUARTERS: Hurst Green, Oxted, Surrey RH8 9BB, U.K. Tel: ++ 44 1883 732020 Fax: ++ 44 1883 733408
IR CANADA: 7231 Victoria Park Ave., Suite #201, Markham, Ontario L3R 2Z8 Tel: (905) 475 1897. Fax: (905) 475 8801
IR GERMANY: Saalburgstrasse 157, 61350 Bad Homburg Tel: ++ 49 6172 96590 Fax: ++ 49 6172 965933
IR ITALY: Via Liguria 49, 10071 Borgaro, Torino Tel: ++ 39 11 4510111 Fax: ++ 39 11 4510220
IR FAR EAST: K&H Bldg., 2F, 30-4 Nishi-Ikebukuro 3-Chome, Toshima-Ku, Tokyo, Japan 171 Tel: 81 3 3983 0086 Fax: 81 3 3983 0642
IR SOUTHEAST ASIA: 315 Outram Road, # 10-02 Tan Boon Liat Building, SINGAPORE 0316. Tel: 65 221 8371. Fax: 65 221 8372.

<http://www.irf.com>

Fax-On-Demand: +44 1883 733420

Data and specifications subject to change without notice

12/97