

**ISP814X, ISP824X, ISP844X3,2,1  
ISP814, ISP824, ISP844-3,-2,-1**



## LOW INPUT CURRENT A.C. INPUT PHOTOTRANSISTOR OPTICALLY COUPLED ISOLATORS

### APPROVALS

- UL recognised, File No. E91231

### 'X' SPECIFICATION APPROVALS

- VDE 0884 in 3 available lead form : -
  - STD
  - G form
  - SMD approved to CECC 00802
- Certified to EN60950 by the following Test Bodies : -
  - Nemko - Certificate No. P96102022
  - Fimko - Registration No. 192313-01..25
  - Semko - Reference No. 963905201
  - Demko - Reference No. 305969

### DESCRIPTION


The ISP814-3,-2,-1, ISP824-3,-2,-1, ISP844-3,-2,-1 series of optically coupled isolators consist of two infrared light emitting diodes connected in inverse parallel and NPN silicon photo transistors in space efficient dual in line plastic packages.

### FEATURES


- Options :-
  - 10mm lead spread - add G after part no.
  - Surface mount - add SM after part no.
  - Tape&reel - add SMT&R after part no.
- Low input current  $\pm 0.25\text{mA}$   $I_F$
- High Isolation Voltage ( $5.3\text{kV}_{\text{RMS}}$ ,  $7.5\text{kV}_{\text{PK}}$ )
- All electrical parameters 100% tested
- Custom electrical selections available

### APPLICATIONS



- Industrial systems controllers
- Signal transmission between systems of different potentials and impedances

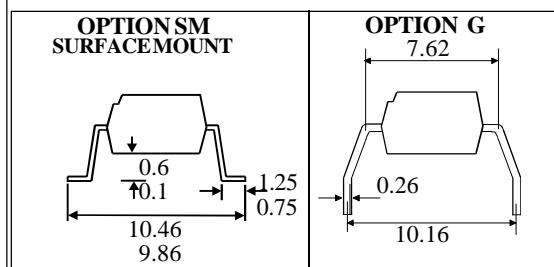




**ISP814X3,2,1  
ISP814-3,2,1**






Dimensions in mm



**ISP824X3,2,1  
ISP824-3,2,1**

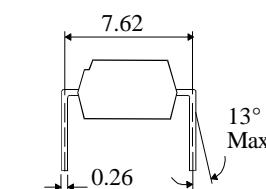

**ISP844X3,2,1  
ISP844-3,2,1**

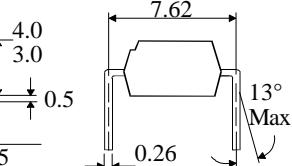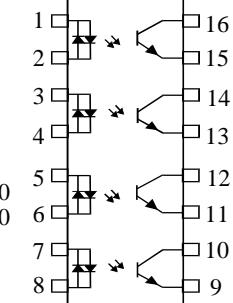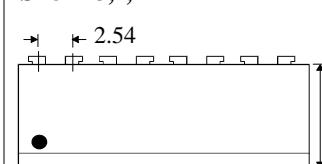

### ISOCOM COMPONENTS LTD

Unit 25B, Park View Road West,  
Park View Industrial Estate, Brenda Road  
Hartlepool, Cleveland, TS25 1YD  
Tel: (01429) 863609 Fax : (01429) 863581

**ABSOLUTE MAXIMUM RATINGS**  
(25°C unless otherwise specified)

Storage Temperature	—	-55°C to + 125°C
Operating Temperature	—	-55°C to + 100°C
Lead Soldering Temperature (1/16 inch (1.6mm) from case for 10 secs)		260°C

**INPUT DIODE**

Forward Current	—	± 50mA
Power Dissipation	—	70mW

**OUTPUT TRANSISTOR**

Collector-emitter Voltage BV <sub>CEO</sub>	—	70V
Emitter-collector Voltage BV <sub>ECO</sub>	—	6V
Power Dissipation	—	150mW

**POWER DISSIPATION**

Total Power Dissipation	—	200mW
(derate linearly 2.67mW/°C above 25°C)		

**ELECTRICAL CHARACTERISTICS ( T<sub>A</sub> = 25°C Unless otherwise noted )**

PARAMETER		MIN	TYP	MAX	UNITS	TEST CONDITION
Input	Forward Voltage (V <sub>F</sub> )		1.2	1.4	V	I <sub>F</sub> = ± 20mA
Output	Collector-emitter Breakdown (BV <sub>CEO</sub> ) ( Note 2 )	70			V	I <sub>C</sub> = 1mA
	Emitter-collector Breakdown (BV <sub>ECO</sub> )	6			V	I <sub>E</sub> = 100µA
	Collector-emitter Dark Current (I <sub>CEO</sub> )			100	nA	V <sub>CE</sub> = 20V
Coupled	Current Transfer Ratio (CTR) (Note 2) ISP814-3, ISP824-3, ISP844-3	20			%	± 0.25mA I <sub>F</sub> , 0.4V V <sub>CE</sub>
		40			%	± 0.5mA I <sub>F</sub> , 0.4V V <sub>CE</sub>
		80			%	± 1.0mA I <sub>F</sub> , 0.4V V <sub>CE</sub>
	ISP814-2, ISP824-2, ISP844-2	40			%	± 0.5mA I <sub>F</sub> , 0.4V V <sub>CE</sub>
		80			%	± 1.0mA I <sub>F</sub> , 0.4V V <sub>CE</sub>
	ISP814-1, ISP824-1, ISP844-1	80			%	± 1.0mA I <sub>F</sub> , 0.4V V <sub>CE</sub>
	Collector-Emitter Saturation Voltage-3		0.4		V	± 0.25mA I <sub>F</sub> , 0.05mA I <sub>C</sub>
	-2		0.4		V	± 0.5mA I <sub>F</sub> , 0.2mA I <sub>C</sub>
	-1		0.4		V	± 1.0mA I <sub>F</sub> , 0.8mA I <sub>C</sub>
	Input to Output Isolation Voltage V <sub>ISO</sub>	5300			V <sub>RMS</sub>	See note 1
		7500			V <sub>PK</sub>	See note 1
	Input-output Isolation Resistance R <sub>ISO</sub>	5x10 <sup>10</sup>			Ω	V <sub>IO</sub> = 500V (note 1)
	Output Rise Time tr		4	18	µs	V <sub>CE</sub> = 2V ,
	Output Fall Time tf		3	18	µs	I <sub>C</sub> =0.05mA,R <sub>L</sub> =100Ω

Note 1 Measured with input leads shorted together and output leads shorted together.

Note 2 Special Selections are available on request. Please consult the factory.

