

TELCO Connector Interface Modules

Data Sheet 1379B

Features

- Connect to 50-way TELCO cables
- DIN-rail mounted with discrete screw connection
- · Jack screw option also available
- · Compact design

Description

The TELCO Connection modules provide discrete screw connections for each pin of a 50-way TELCO connector. Standard 50-way TELCO cables can therefore be easily disconnected without any wiring errors on the field side of the connection. The modules are ideally suited for all applications where a quick connection is required to a TELCO cable.

Applications that would benefit from this installation method include test and measurement, communication, and industrial applications. The screw connector used allows for 30 to 12 AWG wire sizes and can be easily disconnected with a standard blade screw driver.

Table 1. TELCO Specifications

| Technical Data Operational voltage Current rating | |
|---|------------------|
| General Data | |
| Wire size | #30-12 AWG |
| Operating temperature | |
| | (-4°F to +122°F) |
| Dimensions | , |
| Height | 2.30" (58.5 mm) |
| Width | 5.76" (146.3 mm) |
| Depth | |




Figure 1. TELCO Connector Interface Module

Ordering Information

| Part Description | Part Number |
|--|-------------|
| 50-PinTELCO Modules FLKM 50-TEL/S | 56 00 86 6 |
| FLKM 50-TEL/B | 55 41 23 4 |
| Module with Jack Screws FLKM 50-TEL/B-2JS | 56 00 86 5 |
| FLKM 50-TFL/S-2.IS | 56 02 74 2 |

Note: S = Male connector
B = Female Connector
2JS = 2 Jack Screws

1379A002

TELCO Connector Interface Modules

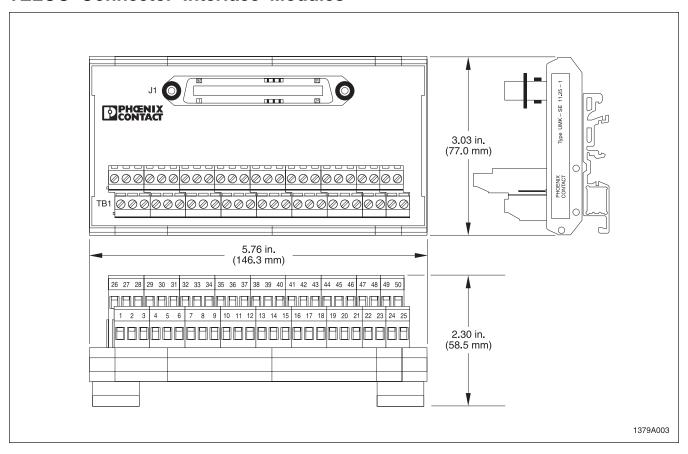


Figure 2. TELCO Dimensions

The information given herein is based on data believed to be reliable, but Phoenix Contact Inc. makes no warranties expressed or implied as to its accuracy and assumes no liability arising out of its use by others. This publication is not to be taken as a license to operate under, or recommendation to infringe, any patent.

Headquarters, U.S.

Phoenix Contact Inc. P.O. Box 4100 Harrisburg, PA 17111-0100 Phone: (717) 944-1300 Fax: (717) 944-1625 Email: info@phoenixcon.com

Web Site: www.phoenixcon.com
Technical Support or Information

Phone: 1-800-322-3225

Headquarters, Canada

Phoenix Contact Ltd. 235 Watline Avenue Mississauga, Ontario L4Z 1P3 Phone: (905) 890-2820 Fax: (905) 890-0180



Data Sheet 1379B