


## Ceramic Disc Capacitors Class 1, 500 V (DC) Narrow Tolerance

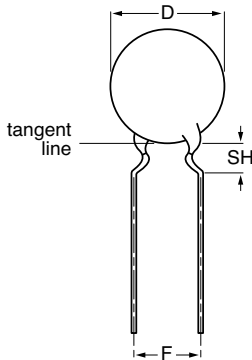

Capacitors with 5 mm (0.20") lead spacing

### FEATURES

- Low losses
- High stability
- High capacitance in small size
- Kinked (preferred) or straight leads
- Lead (Pb)-free available



**RoHS**  
COMPLIANT

### APPLICATIONS

- Bypassing
- Coupling
- Resonant circuit

### DESIGN

The capacitors consist of a ceramic disc both sides of which are silver-plated. Connection leads are made of tinned copper having a diameter of 0.6 mm.

The capacitors have inward kinked leads with a spacing of 5 mm (0.200") and a lead length from 4 to 30 mm. Encapsulation is made of phenolic resin.

### TEMPERATURE COEFFICIENTS:

Class 1 NP0; P100; N150; N750

### SECTIONAL SPECIFICATIONS:

Class 1 IEC 60 384-8,  
EIA 198

### CLIMATIC CATEGORY:

Class 1 55/125/21

### OPERATING TEMPERATURE RANGE:

Class 1 - 55 to + 125 °C

### MARKING

Marking indicates capacitance value and tolerance in accordance with "EIA 198".

### CAPACITANCE RANGE:

Class 1, at 1 MHz, 1.2 V (RMS); 1.0 pF to 330 pF  
1 kHz,  $1 \pm 0.2$  V (RMS) for capacitance values higher than 1000 pF

### RATED DC VOLTAGE:

500 V

### DIELECTRIC STRENGTH:

250 % of rated voltage

### INSULATION RESISTANCE AT 500 V (DC):

$\geq 10\,000\text{ M}\Omega$

### TOLERANCE ON CAPACITANCE:

$\pm 0.25$  pF;  $\pm 2\%$

### DISSIPATION FACTOR:

Class 1,  $C \leq 30$  pF;  $\leq 20 \times (10/C + 0.7) \times 10^{-4}$  maximum

Class 1,  $C > 30$  pF;  $\leq 0.2\%$

The capacitors meet the essential requirements of "EIA 198". Unless stated otherwise all electrical values apply at an ambient temperature of  $25 \pm 3$  °C, at normal atmospheric conditions.



# HV 500 V Narrow Tolerance

Ceramic Disc Capacitors  
Class 1, 500 V (DC) Narrow Tolerance

Vishay BCcomponents

<b>ORDERING INFORMATION, CLASS 1, 500 V (DC), KINKED</b>					
C (pF)	TOL. (%)	D <sub>max</sub> (mm)	LEAD SPACING F (mm)	SH <sup>(2)</sup> (mm)	CLEAR TEXT CODE
					13 <sup>th</sup> DIGIT: T = REEL; U = AMMO; 3 = BULK 16 <sup>th</sup> DIGIT: R = RoHS COMPLIANT
<b>CLASS 1 P100</b>					
1.5	± 0.25 pF	5.0	5.0	4.0	D159C20M7GL6.J5.
2.2					D229C20M7GL6.J5.
3.3					D339C20M7GL6.J5.
4.7					D479C20M7GL6.J5.
6.8	± 2 %	6.5	5.0	4.0	D689C25M7GL6.J5.
10		7.5			D100G29M7GL6.J5.
15		8.5			D150G33M7GL6.J5.
22		10.0			D220G39M7GL6.J5.
33		12.0			D330G47M7GL6.J5.
<b>CLASS 1 NP0</b>					
1.0	± 0.25 pF	5.0	5.0	4.0	D109C20C0KL6.J5.
1.5					D159C20C0KL6.J5.
2.2					D229C20C0JL6.J5.
3.3					D339C20C0JL6.J5.
4.7					D479C20C0HL6.J5.
6.8	± 2 %	6.5	5.0	4.0	D689C20C0HL6.J5.
10					D100G20C0GL6.J5.
15					D150G20C0GL6.J5.
22					D220G25C0GL6.J5.
33					D330G25C0GL6.J5.
47					D470G29C0GL6.J5.
68					D680G33C0GL6.J5.
100					D101G39C0GL6.J5.
150					D151G47C0GL6.J5.
<b>CLASS 1 N150</b>					
2.2	± 0.25 pF	5.0	5.0	4.0	D229C20P2JL6.J5.
3.3					D339C20P2JL6.J5.
4.7					D479C20P2HL6.J5.
6.8					D689C20P2HL6.J5.
10	± 2 %	6.5	5.0	4.0	D100G20P2GL6.J5.
15					D150G20P2GL6.J5.
22					D220G25P2GL6.J5.
33					D330G25P2GL6.J5.
47					D470G29P2GL6.J5.
68					D680G33P2GL6.J5.
100					D101G43P2GL6.J5.

# HV 500 V Narrow Tolerance



Vishay BCcomponents

Ceramic Disc Capacitors  
Class 1, 500 V (DC) Narrow Tolerance

<b>ORDERING INFORMATION, CLASS 1, 500 V (DC), KINKED</b>						
C (pF)	TOL. (%)	D <sub>max</sub> (mm)	LEAD SPACING F (mm)	SH <sup>(2)</sup> (mm)	CLEAR TEXT CODE	
					13 <sup>th</sup> DIGIT: T = REEL; U = AMMO; 3 = BULK 16 <sup>th</sup> DIGIT: R = RoHS COMPLIANT	
<b>CLASS 1 N750</b>						
6.8	± 0.25	5.0	5.0	4.0	D689C20U2JL6.J5.	
10	± 2 %				6.5	D100G20U2JL6.J5.
15						D150G20U2JL6.J5.
22						D220G20U2JL6.J5.
33		D330G25U2JL6.J5.				
47		D470G29U2JL6.J5.				
68		D680G33U2JL6.J5.				
100	10.0	D101G39U2JL6.J5.				
150	12.0	D151G47U2JL6.J5.				


**Notes**

1. Maximum thickness 4.0 mm.
2. SH = seated height.
3. Lead style codes refer to inward kinked leads. Other styles available on request.
4. Other capacitance values E12 series available.

<b>PACKAGING</b>				
D <sub>max</sub> (mm)	SIZE CODE	PACKAGING QUANTITIES		
		BULK	REEL	AMMO
5.0 (0.20")	20	1000	2000	2000
6.5 (0.25")	25			
7.5 (0.29")	29			
8.5 (0.33")	33			
10.0 (0.39")	39			
11.0 (0.43")	43			
12.0 (0.47")	47			

**Note**

1. The capacitors are supplied in bulk packaging (cardboard boxes), in tape on reel or in ammpack.

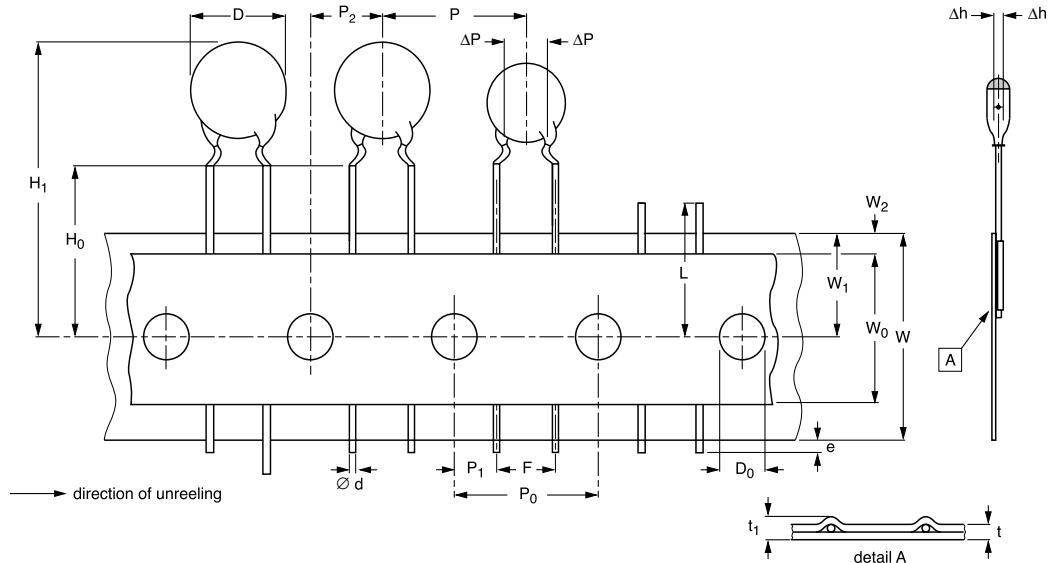

Kinked capacitors on tape, lead spacing 5.0 mm (0.2")

DIMENSIONS OF TAPE			
SYMBOL	PARAMETER	DIMENSIONS (mm)	
		NOMINAL	TOLERANCE
D	body diameter	11.0 maximum	-
d	lead diameter	0.6	± 0.05
P	pitch between capacitors	12.7	± 1.0
P <sub>0</sub>	feed-hole pitch	12.7	± 0.3; note 1
ΔP	plane deviation	1.0 maximum	-
P <sub>1</sub>	feed-hole centre to lead centre	3.85	± 0.7; note 2
P <sub>2</sub>	feed-hole centre to component centre	6.35	± 1.3; note 2
F	lead spacing	5.0	+ 0.6 - 0.4
Δh	component alignment	0	± 1.0
W	tape width	18.0	+ 1.0 - 0.5
W <sub>0</sub>	hold-down tape width	5.0 minimum	-
W <sub>1</sub>	hole position	9.0	+ 0.75 - 0.5
W <sub>2</sub>	hold-down tape margin	3.0 maximum	-
H <sub>0</sub>	height to seating plane	16.0	± 0.5
H <sub>1</sub>	maximum component height	32.0	-
e	lead end protrusion	1.0 maximum	-
L	maximum length of snapped lead	11.0	-
D <sub>0</sub>	feed-hole diameter	4.0	± 0.2
t	total tape thickness	0.9 maximum	-
t <sub>1</sub>	maximum thickness of tape and wires	1.5 maximum	-

### Notes

1. Cumulative pitch error:  $\pm \leq 1$  mm/20 pitches.
2. Obliquity maximum 3°.


# HV 500 V Narrow Tolerance

Vishay BCcomponents


Ceramic Disc Capacitors  
Class 1, 500 V (DC) Narrow Tolerance



## REEL AND TAPE DATA in millimeters

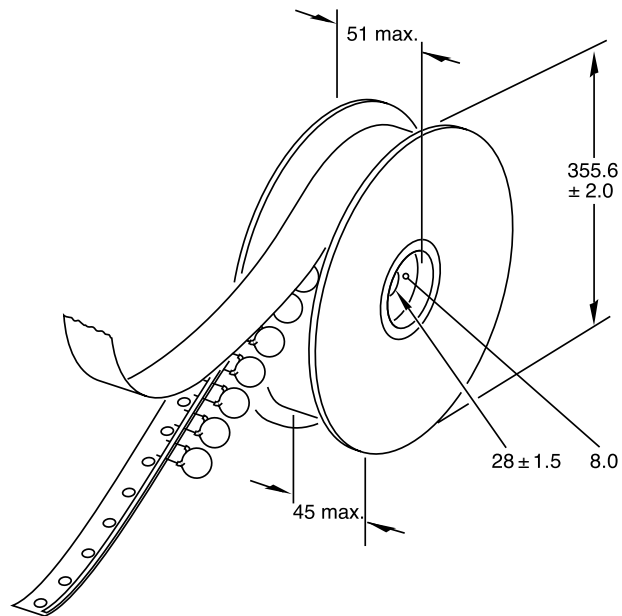

Reel with capacitors on tape

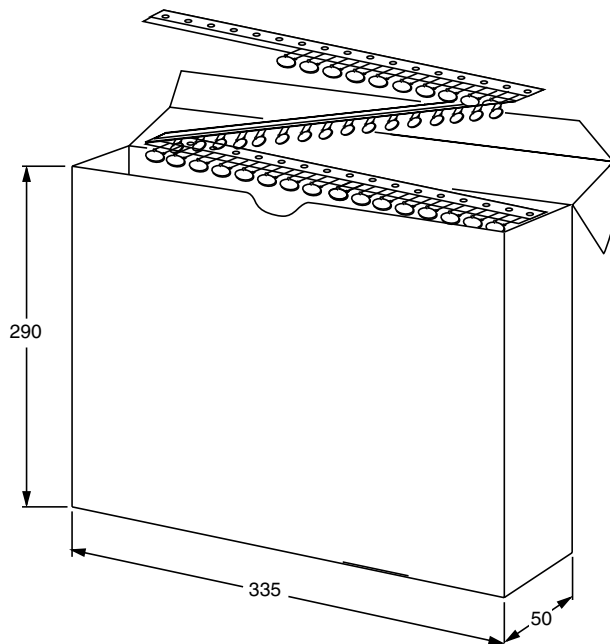

Ammopack with capacitors on tape



## Notice

Specifications of the products displayed herein are subject to change without notice. Vishay Intertechnology, Inc., or anyone on its behalf, assumes no responsibility or liability for any errors or inaccuracies.

Information contained herein is intended to provide a product description only. No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document. Except as provided in Vishay's terms and conditions of sale for such products, Vishay assumes no liability whatsoever, and disclaims any express or implied warranty, relating to sale and/or use of Vishay products including liability or warranties relating to fitness for a particular purpose, merchantability, or infringement of any patent, copyright, or other intellectual property right.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications. Customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify Vishay for any damages resulting from such improper use or sale.