


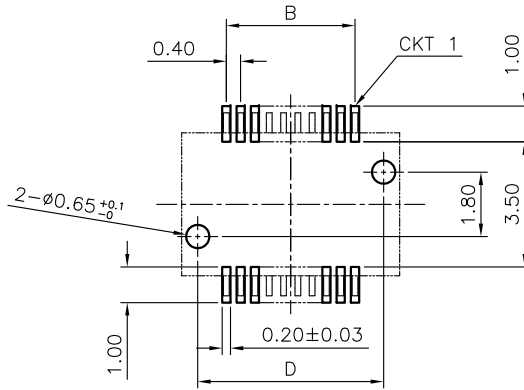
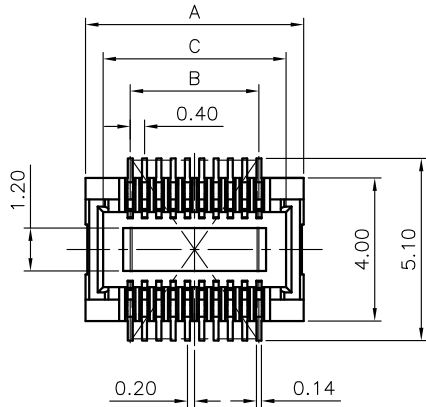





A B C D E F

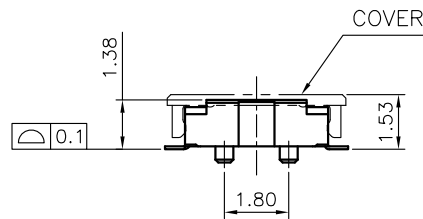

RECOMMENDED PCB LAYOUT
GENERAL TOLERANCE ±0.05



NOTES:

1. MATERIAL:
 - 1.1 HOUSING: THERMOPLASTIC, HIGH TEMP., UL94V-0; COLOR:BLACK.
 - 1.2 CONTACT: COPPER ALLOY
2. FINISH:
 - CONTACT:
 - 1:GOLD FLASH PLATING OVERALL.
 - U:5u" GOLD ON CONTACT AND SOLDER FOR SELECTIVENESS PLATING
 - 50~100u" NICKEL UNDERPLATING OVERALL.
3. REFLOW SOLDER CAPABLE TO 260°C PER ACES SPEC.
4. SPEC. PLS. REFER TO PS-50003-xxxxx-xxx
5. PACKAGE PLS. REFER TO 88670-XXX1-TRP

6. PART NUMBER

50006-XXX	X	X-XXX	Other	Housing Color	WITH BOSS
			001	Black	N
			002	Black	Y

- PACKING
- 0:TAPE & REEL
 - 1:TUBE
 - 7:TAPE & REEL WITH COVER
 - 8:TUBE WITH COVER

- PLATING
- 1: G/F OVERALL(LEAD FREE)
 - U:5u" GOLD ON CONTACT AND SOLDER FOR SELECTIVENESS PLATING

CKT	Dim A	Dim B	Dim D
16	5.30	2.80	4.40
20	6.10	3.60	5.20
24	6.90	4.40	6.00
26	7.30	4.80	6.40
28	7.70	5.20	6.80
30	8.10	5.60	7.20
34	8.90	6.40	8.00
40	10.10	7.60	9.20
50	12.10	9.60	11.20
54	12.90	10.40	12.00

一般公差 TOLERANCES X ±0.5 .XX ±0.15 X ±0.25 .XXX ±0.1 ANGLES ±2°		宏致電子股份有限公司 Aces Electronic Co.,Ltd.	
檢驗尺寸標示 SYMBOLS INDICATE CLASSIFICATION DIMENSION	品名 (TITLE) 0.4mm BTB RCPT(H=1.5) SMT D/R S/T TYPE	製圖 (DR) 10/11/15 審核 (CHKD) CARL	yangwu
MARK IS CRITICAL DIM. MARK IS MAJOR DIM.	圖號 (DWG.NO) 50006-XXXXX-XXX	核准 (APPD) JASON	
表面處理 (FINISH)	比例 (SCALE) 5:1	單位 (UNITS) mm	張數 (SHEET) 1 OF 1
			尺寸 (SIZE) A4
			版次 (REV) C

A B C D E F