


# P 4000 A ... P 4000 M

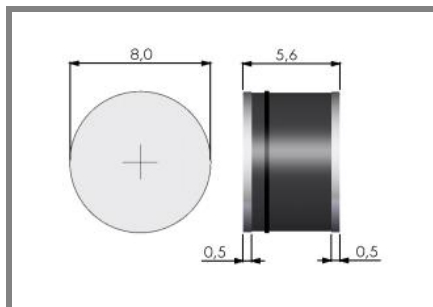

## Surface mount diode

## Standard silicon rectifier diodes

### P 4000 A ... P 4000 M

Forward Current: 40 A

Reverse Voltage: 50 to 1000 V

### Features

- Max. solder temperature: 260°C
- Plastic material has UL classification 94V-0

### Mechanical Data

- Plastic case: MaxiMelf
- Terminals: plated terminals solderable per MIL-STD-750
- Mounting position: any

1) Max. temperature of the terminals  $T_T = 100\text{ °C}$

2)  $I_F = 5\text{ A}$ ,  $T_J = 25\text{ °C}$

3)  $T_A = 25\text{ °C}$


Type	Polarity color band	Repetitive peak reverse voltage $V_{RRM}$ V	Surge peak reverse voltage $V_{RSM}$ V	Maximum forward voltage $T_J = 25\text{ °C}$ $I_F = 5\text{ A}$ $V_F^{(2)}$ V	Maximum reverse recovery time $I_F = -\text{A}$ $I_R = -\text{A}$ $I_{RR} = -\text{A}$ $t_{rr}$ ns
P 4000 A	-	50	50	0,85	-
P 4000 B	-	100	100	0,85	-
P 4000 D	-	200	200	0,85	-
P 4000 G	-	400	400	0,85	-
P 4000 J	-	600	600	0,87	-
P 4000 K	-	800	800	0,87	-
P 4000 M	-	1000	1000	0,87	-

### Absolute Maximum Ratings $T_A = 25\text{ °C}$ , unless otherwise specified

Symbol	Conditions	Values	Units
$I_{FAV}$	Max. averaged fwd. current, R-load, $T_T = 100\text{ °C}$ 1)	40	A
$I_{FRM}$	Repetitive peak forward current $f > 15\text{ Hz}$ 1)	100	A
$I_{FSM}$	Peak fwd. surge current 50 Hz half sinus-wave 3)	700	A
$I^2t$	Rating for fusing, $t < \text{ms}$ 3)	2500	A <sup>2</sup> s
$R_{thA}$	Max. thermal resistance junction to ambient	1	K/W
$R_{thT}$	Max. thermal resistance junction to terminals		K/W
$T_J$	Operating junction temperature	- 50 ... 175	°C
$T_s$	Storage temperature	- 50 ... 175	°C

### Characteristics $T_A = 25\text{ °C}$ , unless otherwise specified

Symbol	Conditions	Values	Units
$I_R$	Maximum leakage current, $T_J = 25\text{ °C}$ ; $V_R = V_{RRM}$ $T_J = \text{°C}$ ; $V_R = V_{RRM}$	<10	µA
$C_J$	Typical junction capacitance (at MHz and applied reverse voltage of V)	-	pF
$Q_{rr}$	Reverse recovery charge ( $U_R = V$ ; $I_F = A$ ; $dI_F/dt = A/ms$ )	-	µC
$E_{RSM}$	Non repetitive peak reverse avalanche energy ( $I_R = \text{mA}$ ; $T_J = \text{°C}$ ; inductive load switched off)	-	mJ

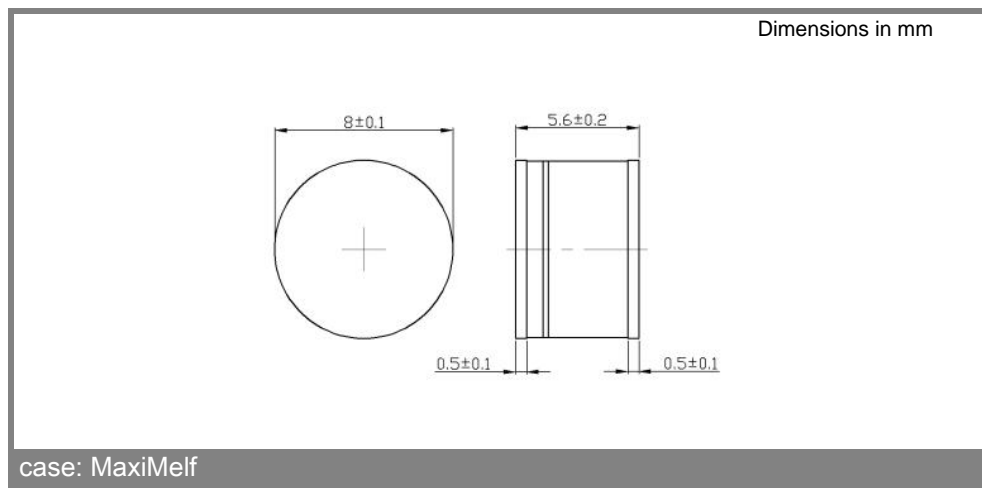

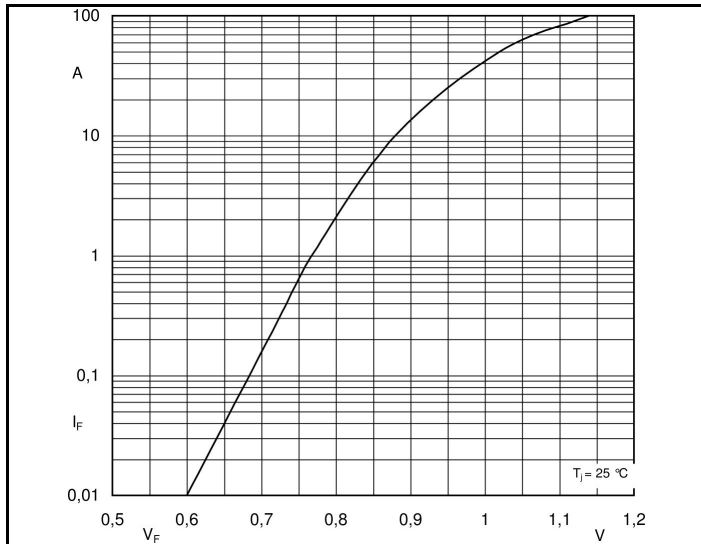


Fig. 1 Forward characteristic (typical values)

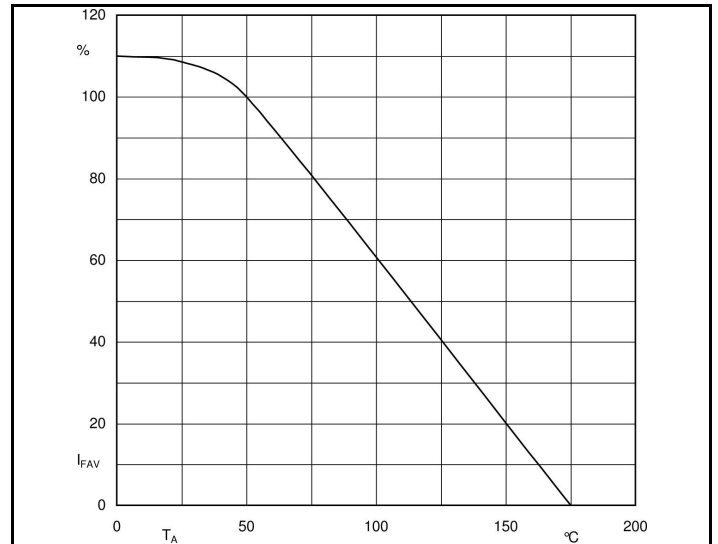


Fig. 2 Rated forward current vs. temp. of the terminals

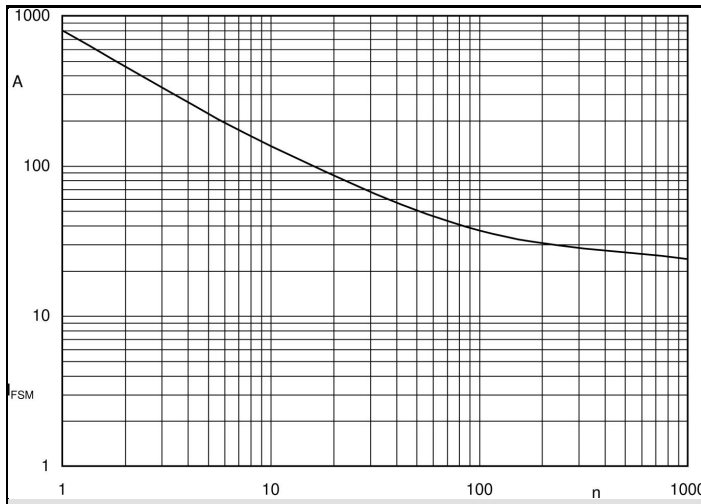


Fig. 3  $I_{FSM}$  current versus number of cycles at 50 Hz