

SHINDENGEN

Schottky Rectifiers (SBD)

Single

D1FS6

60V 1.1A


FEATURES

- Small SMT
- $T_j=150$
- P_{RRSM} avalanche guaranteed

APPLICATION

- Switching power supply
- DC/DC converter
- Home Appliances, Office Equipment
- Telecommunication

OUTLINE DIMENSIONS

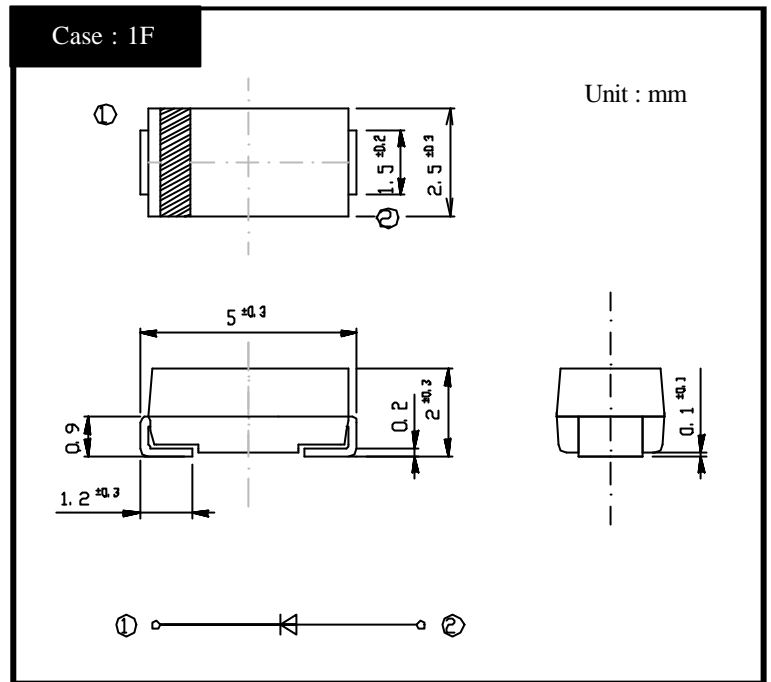

RATINGS

Absolute Maximum Ratings (If not specified $T_I=25$)


Item	Symbol	Conditions	Ratings	Unit
Storage Temperature	T_{stg}		-55 ~ 150	
Operating Junction Temperature	T_j		150	
Maximum Reverse Voltage	V_{RM}		60	V
Repetitive Peak Surge Reverse Voltage	V_{RRSM}	Pulse width 0.5ms, duty 1/40	65	V
Average Rectified Forward Current	I_o	50Hz sine wave, R-load $T_a=25$ On alumina substrate	1.1	A
		50Hz sine wave, R-load $T_a=25$ On glass-epoxy substrate	0.82	
Peak Surge Forward Current	I_{FSM}	50Hz sine wave, Non-repetitive 1 cycle peak value, $T_j=125$	40	A
Repetitive Peak Surge Reverse Power	P_{RRSM}	Pulse width 10 μ s, $T_j=25$	60	W

Electrical Characteristics (If not specified $T_I=25$)

Item	Symbol	Conditions	Ratings	Unit
Forward Voltage	V_F	$I_F=1.1A$, Pulse measurement	Max.0.58	V
Reverse Current	I_R	$V_R=V_{RM}$, Pulse measurement	Max.1	mA
Junction Capacitance	C_j	$f=1MHz$, $V_R=10V$	Typ.50	pF
Thermal Resistance	θ_{jl}	junction to lead	Max.23	/W
	θ_{ja}	junction to ambient On alumina substrate	Max.108	
		junction to ambient On glass-epoxy substrate	Max.157	


D1FS6

Forward Voltage

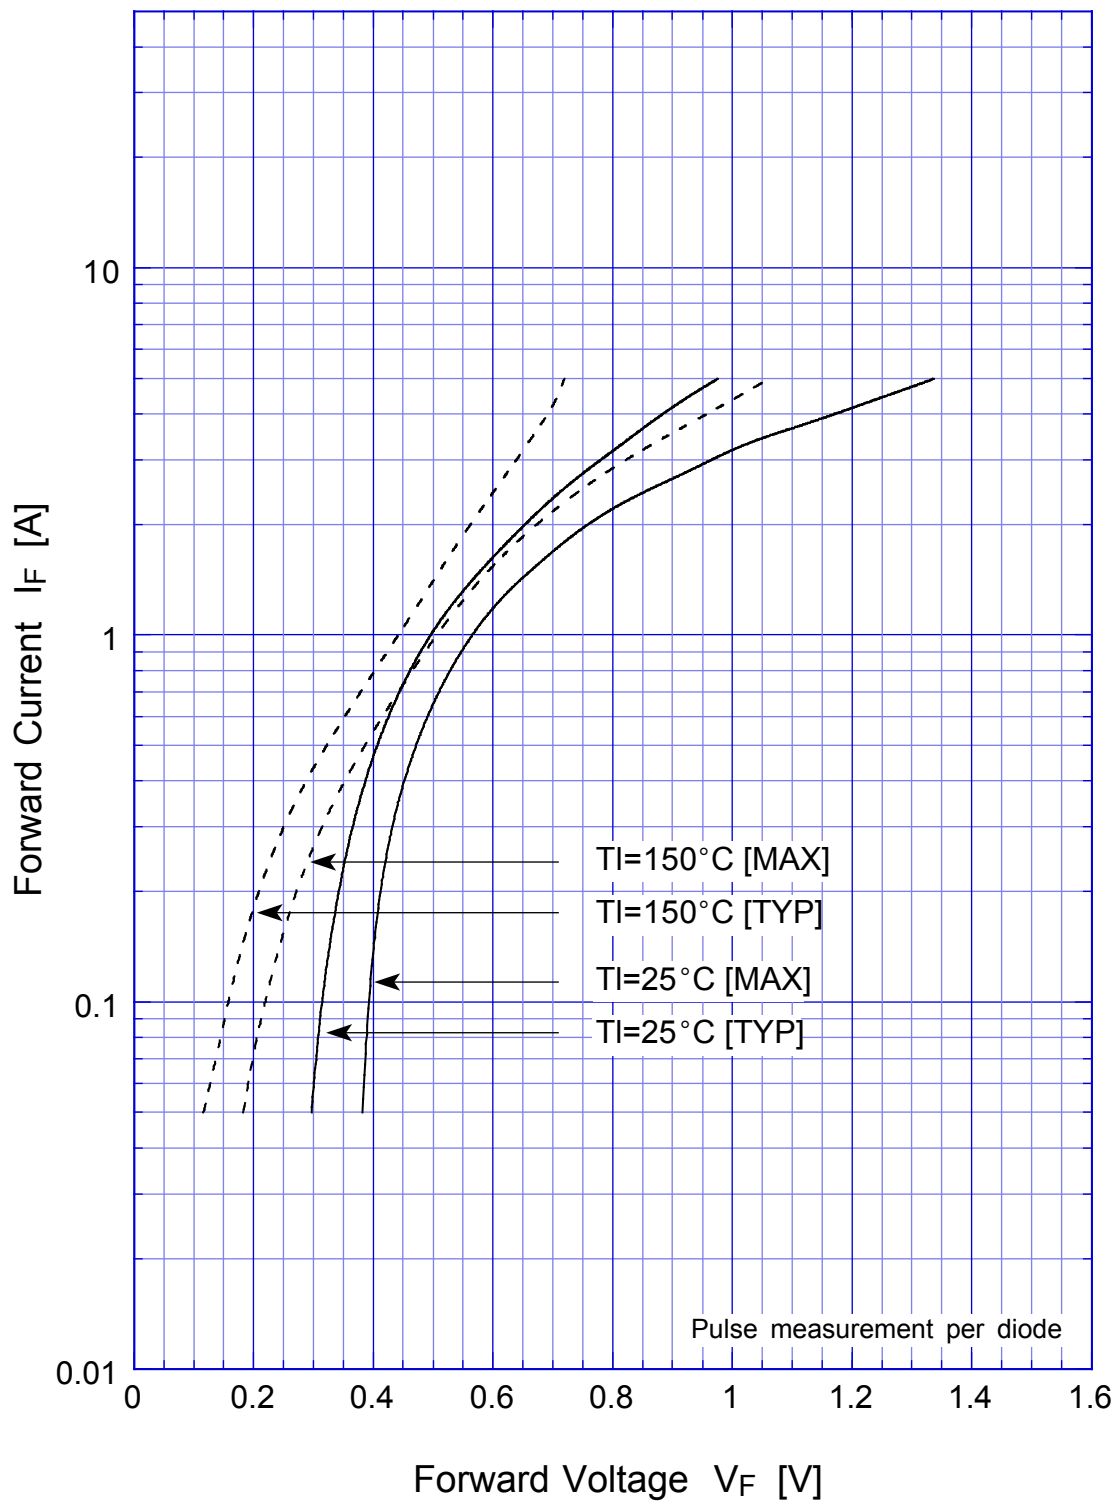


D1FS6

Junction Capacitance

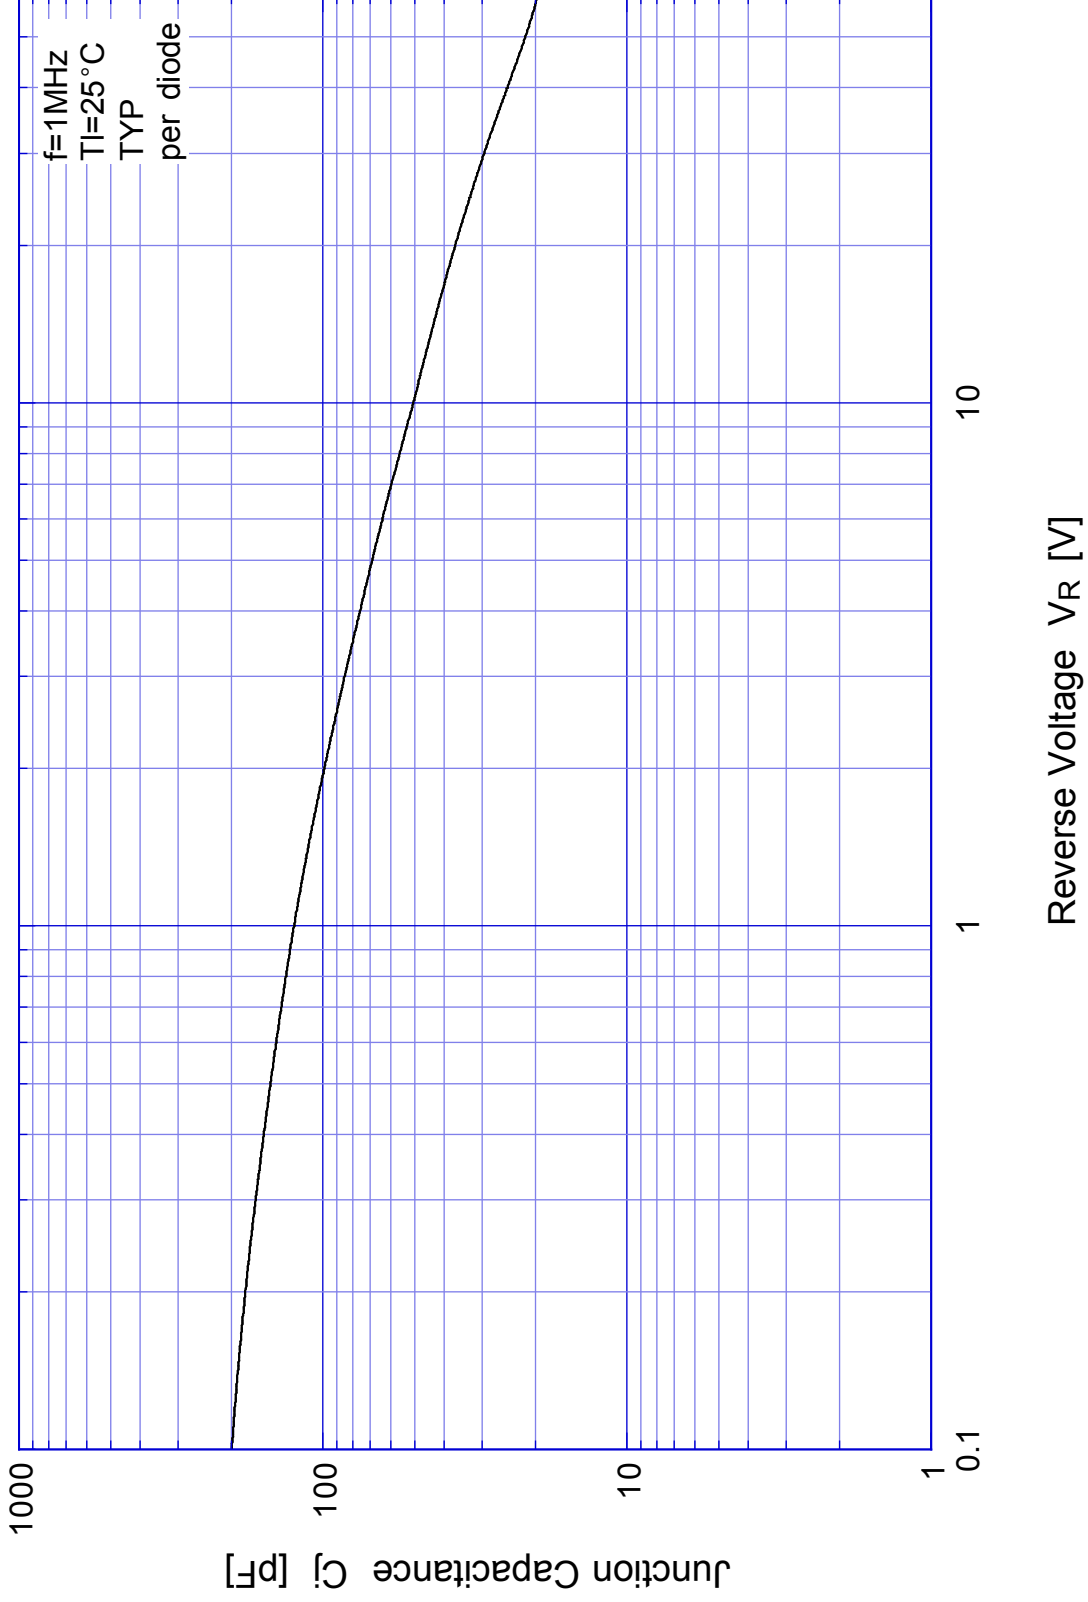


D1FS6

Reverse Current

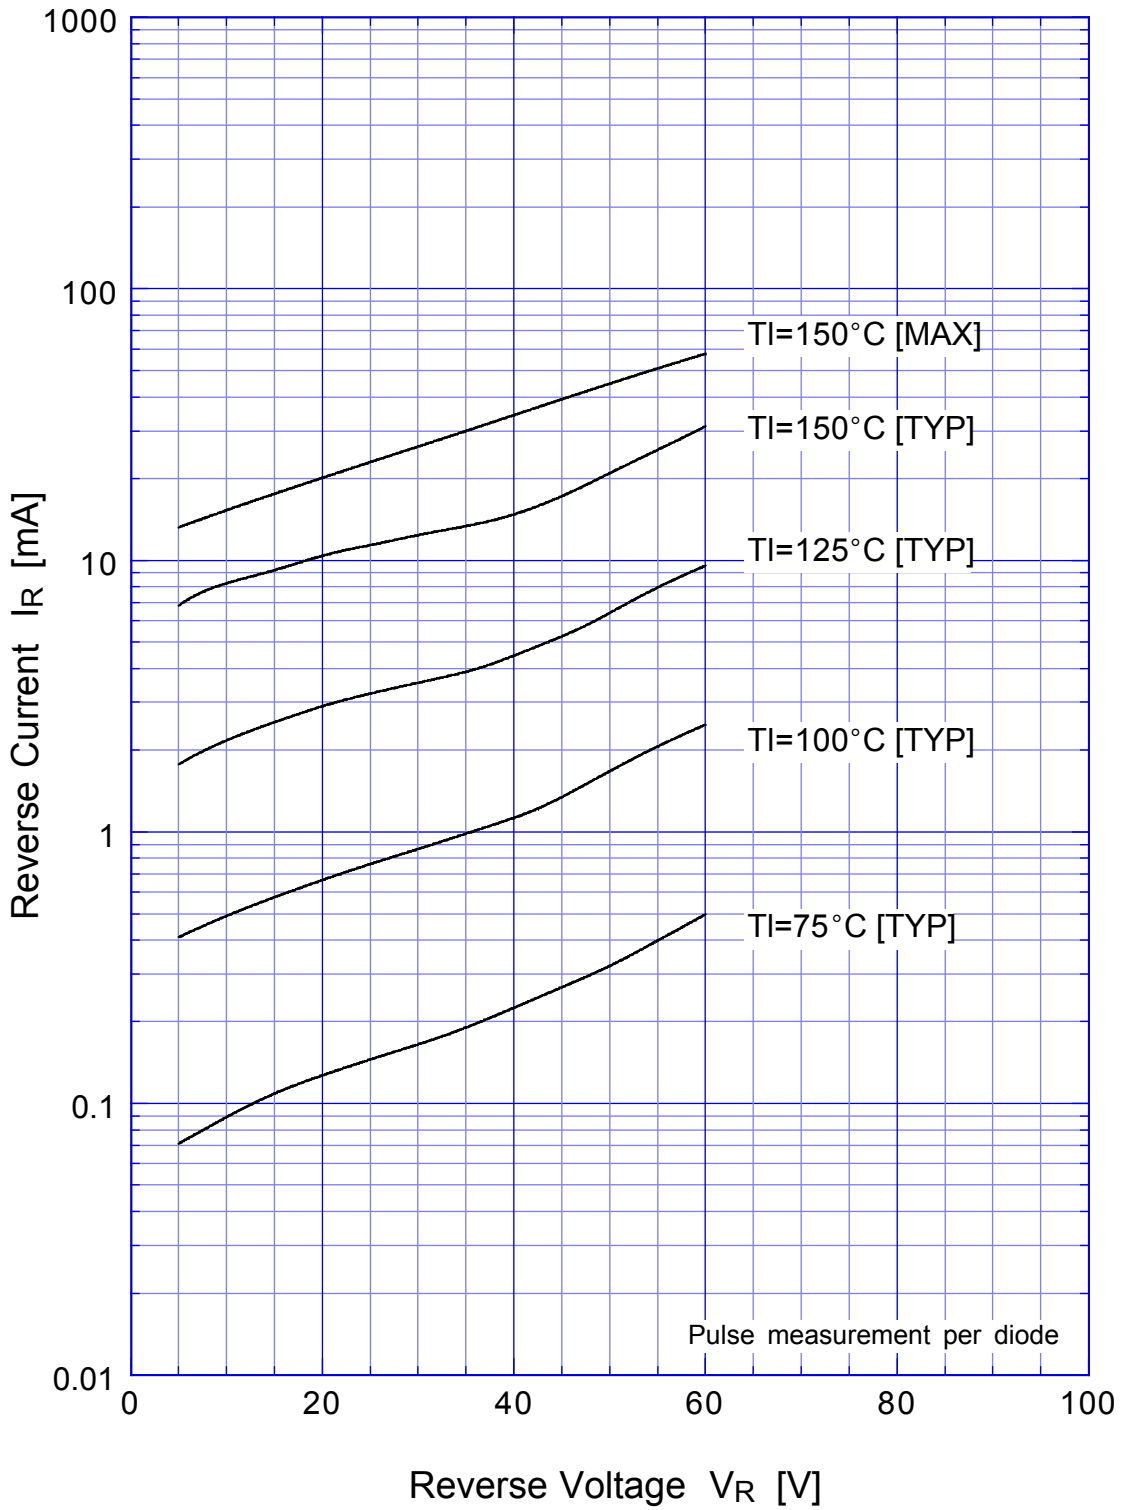


D1FS6

Reverse Power Dissipation

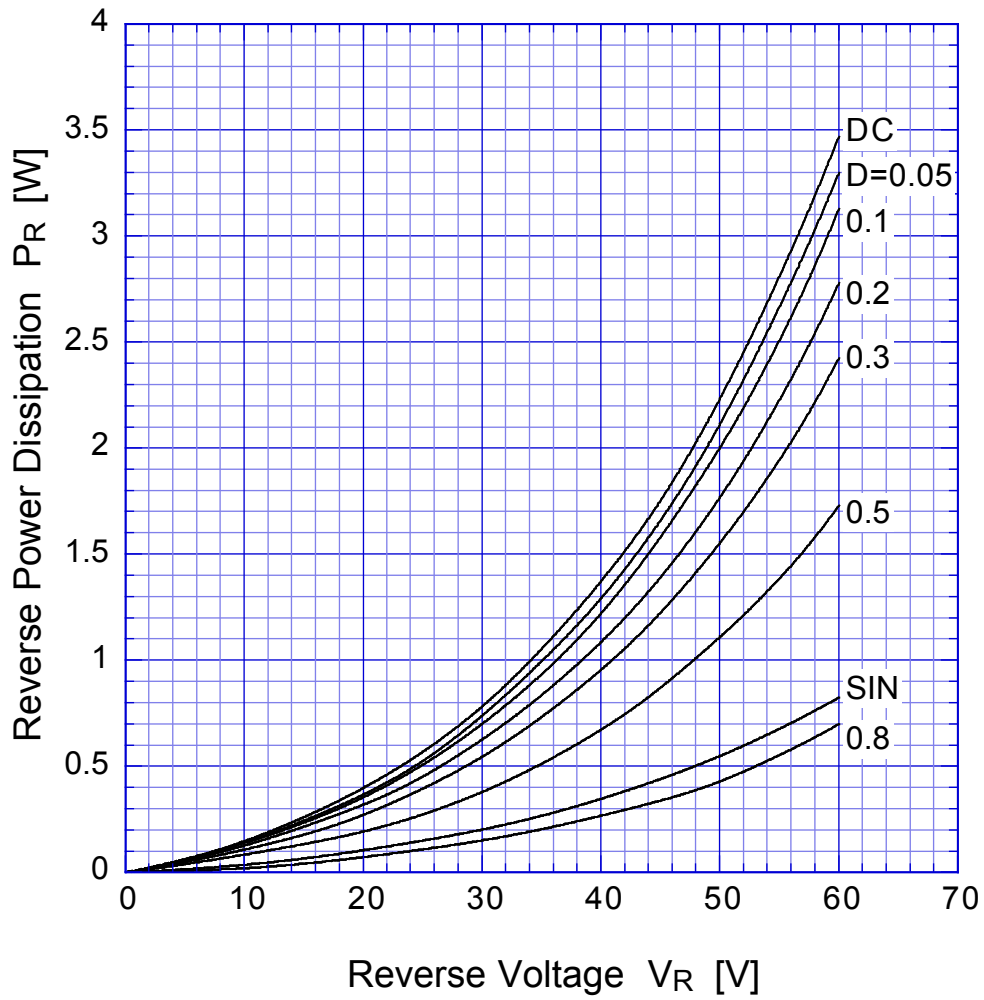


$T_j = 150^\circ\text{C}$

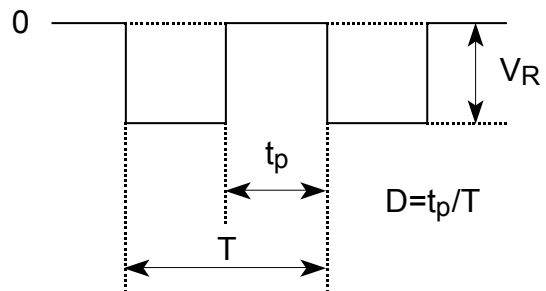


D1FS6

Forward Power Dissipation

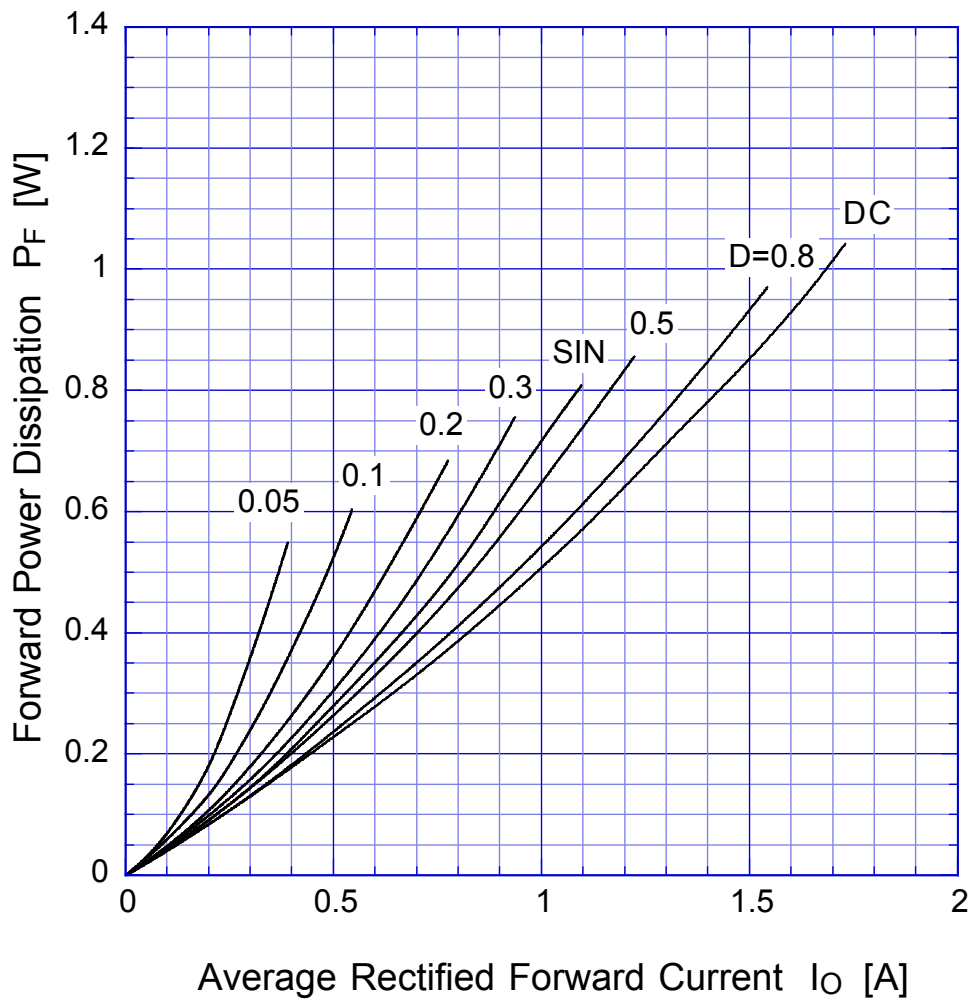


$T_j = 150^\circ\text{C}$

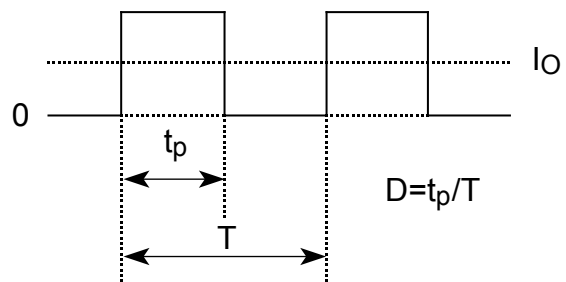

D1FS6

Derating Curve

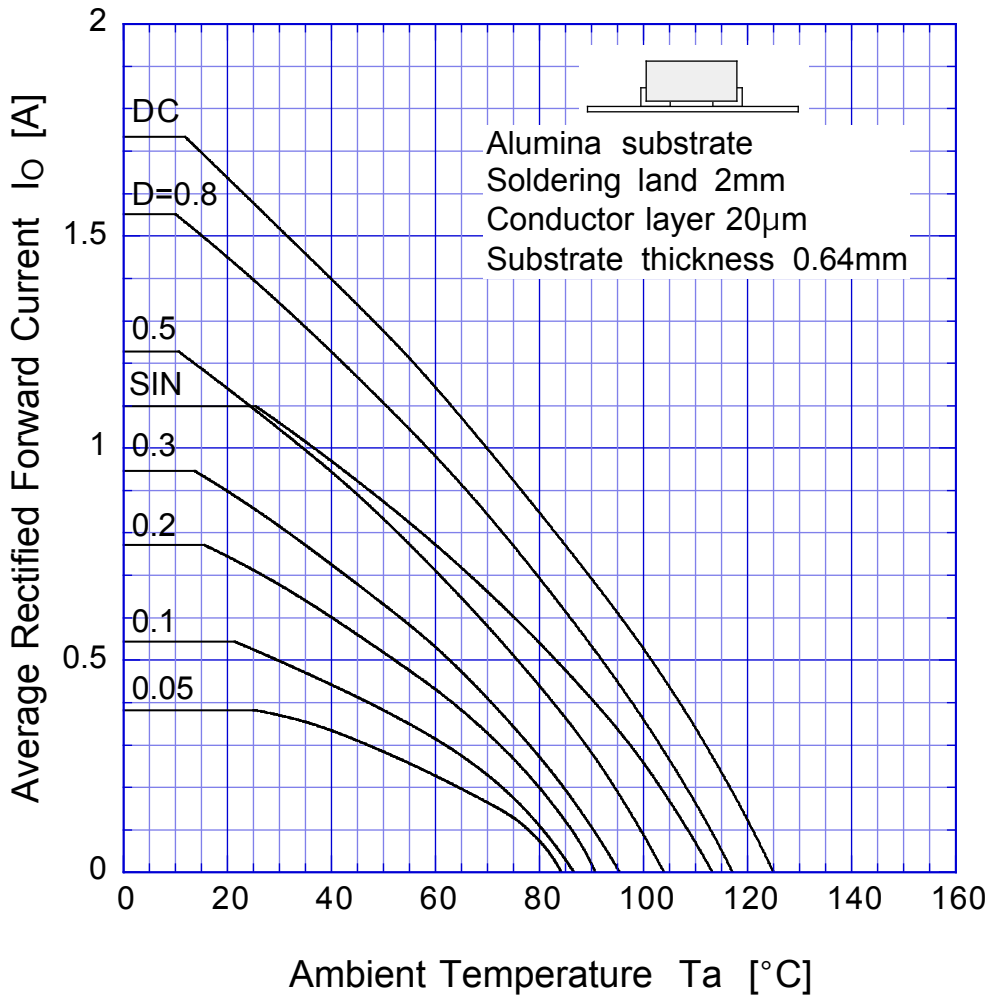


$V_R = 20V$



D1FS6

Derating Curve

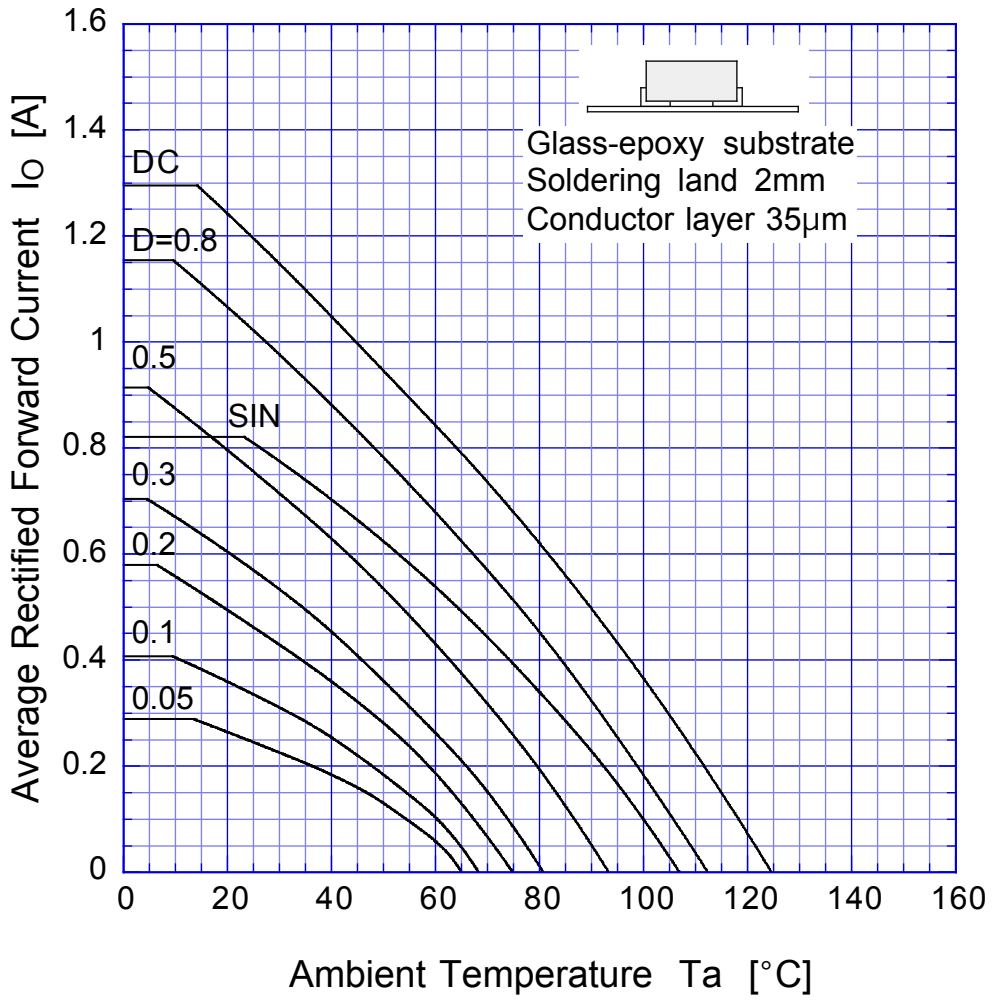


$V_R = 20V$



D1FS6

Peak Surge Forward Capability

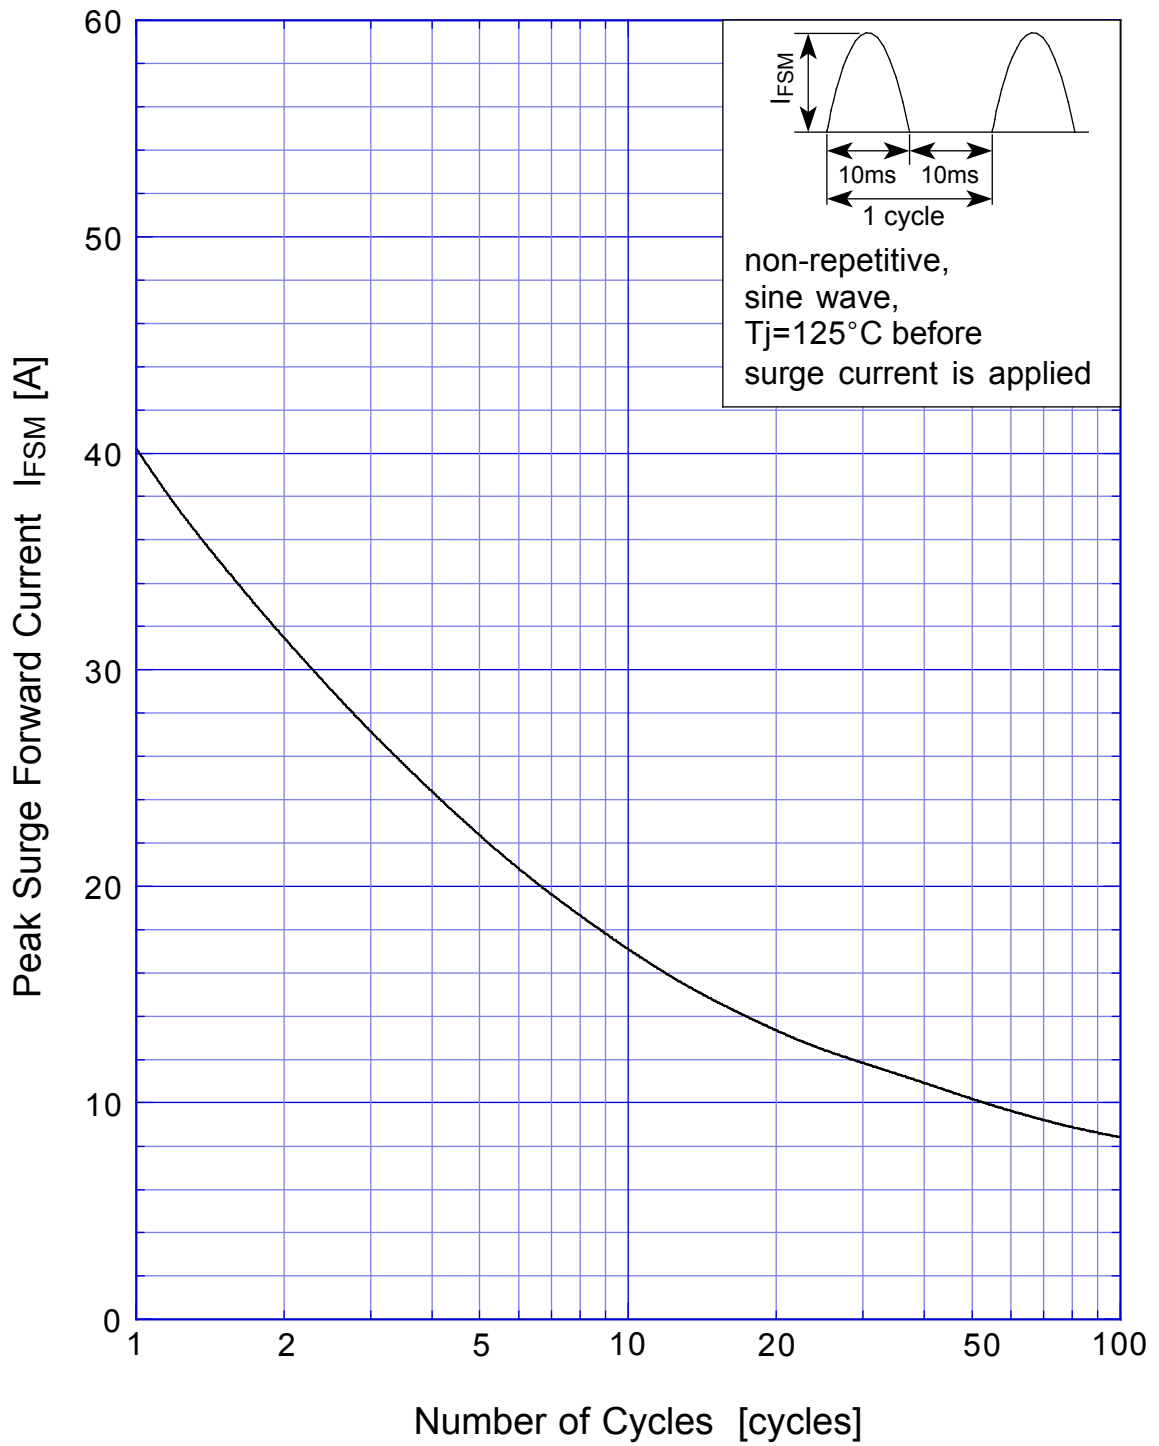

SBD Repetitive Surge Reverse Power Derating Curve



SBD

Repetitive Surge Reverse Power Capability

